


HIGH SPEED PORTABLE FIELD TESTER

NetBlazer V2 Series

700Gv2/800v2/890 Series

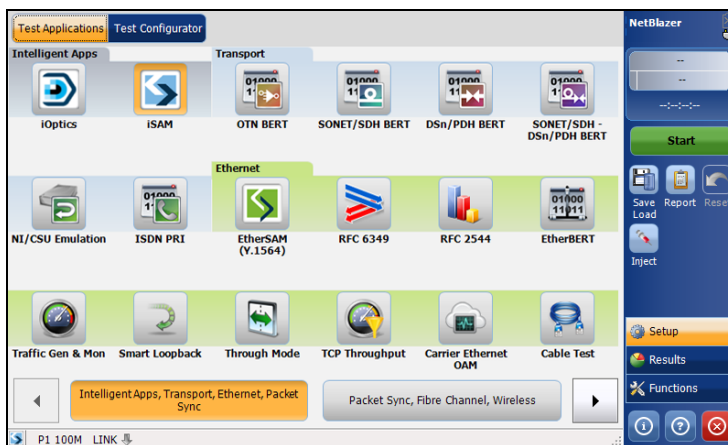

www.EXFO.com

Telecom Test and Measurement

EXFO

EXPERTISE REACHING OUT

Copyright © 2015–2016 EXFO Inc. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form, be it electronically, mechanically, or by any other means such as photocopying, recording or otherwise, without the prior written permission of EXFO Inc. (EXFO).

Information provided by EXFO is believed to be accurate and reliable. However, no responsibility is assumed by EXFO for its use nor for any infringements of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent rights of EXFO.

EXFO's Commerce And Government Entities (CAGE) code under the North Atlantic Treaty Organization (NATO) is 0L8C3.

The information contained in this publication is subject to change without notice.

Trademarks

EXFO's trademarks have been identified as such. However, the presence or absence of such identification does not affect the legal status of any trademark.

Units of Measurement

Units of measurement in this publication conform to SI standards and practices.

Patents

Dual Test Set/Bi-Directional testing is protected by US patent 9,432,206 and equivalents in other countries.

November 4, 2016

Document version: 8.0.0.&

Contents

Certification Information	x
1 Introducing the High Speed Portable Field Tester	1
Features	1
Technical Specifications	2
Conventions	3
2 Safety Information	5
Additional Laser Safety Information	6
Installation Instruction Warnings	7
3 Getting Started	9
Turning On the Unit	9
Starting the NetBlazer V2 Series Application	9
4 Physical Interfaces and LEDs	11
FTB-870v2 and FTB-870Q Modules	11
FTB-880v2, 880Q, 720Gv2, 730Gv2 Modules	12
FTB-890, 890NGE Modules	13
Port Availability on the 700Gv2/800v2/890 Series	14
CFP4 and QSFP Interfaces	16
SFP+ (P1/P2)	17
RJ45	18
BNC (TX/RX2 and RX)	18
BNC (EXT CLK)	18
RJ48C	19
BANTAM	19
Headset/Microphone Port (FTB-1v2)	20
Fibre Cables Connection	20
EXT CLK	21
REF OUT	21
LEDs	22

5	Graphical User Interface Overview	23
	Main Application Window	23
	Main Window	23
	Navigation Buttons	23
	Status Bar	24
	Title Bar	26
	Global Indicator	27
	Test Control	29
	Test Menu	29
	Application Buttons	30
	Zoomed-In/Zoomed-Out Views	33
	Arrow Buttons	33
	Keyboard Usage	34
6	Test Setup - Test Applications	37
	iOptics	38
	iSAM	39
	OTN BERT	40
	SONET/SDH BERT	42
	DSn/PDH BERT	45
	SONET/SDH - DSn/PDH BERT	47
	NI/CSU Emulation	50
	ISDN PRI	51
	EtherSAM (Y.1564)	52
	RFC 2544	54
	RFC 6349	56
	EtherBERT	57
	Traffic Gen & Mon	59
	Smart Loopback	61
	Through Mode	63
	TCP Throughput	64
	Carrier Ethernet OAM	65
	Cable Test	67
	1588 PTP	69
	SyncE	70
	FC BERT	71
	CPRI/OBSAI BERT	72

7	Selecting and Starting a Test	75
	Intelligent Apps	75
	Transport Test Applications	79
	Ethernet Test Applications	81
	Packet Sync Test Applications	83
	Fibre Channel Test Application	85
	Wireless Test Application	87
8	Test Setup - Test Configurator, Timer, and System	89
	Test Configurator Overview	94
	Modify Structure Button	100
	Signal Auto-Detect	116
	1588 PTP	117
	BERT	124
	Cable Test	129
	CFP4/QSFP/SFP+	131
	Clock	132
	EtherBERT, FC BERT, BERT (CPRI), and Unframed BERT	137
	EtherSAM - Burst	142
	EtherSAM - Global	144
	EtherSAM - Ramp	148
	Fibre Channel	150
	Frequency	153
	FTFL/PT	155
	Interface (Ethernet, Packet Sync, Fibre Channel, and Wireless)	158
	ISDN PRI - Call Management	169
	ISDN PRI - ISDN Settings	174
	Labels	176
	Link OAM	177
	Local Details (iSAM)	179
	MAC/IP/UDP	183
	Network	198
	Network Details (iSAM)	204
	Optical Device Under Test (iOptics)	214
	Remote Details (iSAM)	217
	RFC 2544 - Global	221
	RFC 2544 - Subtests	224
	RFC 6349	233
	S-OAM and MPLS-TP OAM	236
	Services - Global	246
	Services - Profile	249
	Signal (Transport)	256

Signal - Signal Configuration (DSn/PDH)	264
Signal - Signal Configuration (OTN)	273
Signal - Signal Configuration (SONET/SDH)	275
Smart Loopback	279
Streams - Global	281
Streams - Profile	283
SyncE	291
System	293
TCP Throughput	294
Test Sequence (iOptics)	296
Timer	297
Traces (OTN)	299
Traces (SONET/SDH)	302
9 Test Results	305
Alarms/Errors Overview	308
Alarms/Errors	310
FTFL/PT	371
Graph (RFC 2544)	373
ISDN Logger	374
Labels	379
Link OAM	380
Logger and Alarms/Errors Logger	384
MPLS	386
OTL-SDT	387
Performance Monitoring	389
PTP Stats	396
Quality Level (1588 PTP)	398
Quality Level (SyncE)	401
S-OAM and MPLS-TP OAM	404
Service Configuration - Burst	409
Service Configuration - Ramp	410
Service Performance	412
Streams - Frame Loss / Out-of-Sequence	414
Streams - Jitter	414
Streams - Latency	415
Streams - Throughput	416
Summary	417
Summary (1588 PTP)	423
Summary (Cable Test)	428
Summary (EtherSAM)	434
Summary (FC BERT)	437

Summary (iOptics)	440
Summary (iSAM)	442
Summary (ISDN PRI)	446
Summary (Link OAM)	452
Summary (NI/CSU Emulation)	454
Summary (RFC 2544)	455
Summary (RFC 6349)	458
Summary (S-OAM and MPLS-TP OAM)	461
Summary (SyncE)	466
Summary (TCP Throughput)	469
Summary (Traffic Gen & Mon)	472
Traces - OTN	474
Traces - SONET/SDH	476
Traffic - Ethernet	477
Traffic - Flow Control	480
Traffic - Graph	482
Traffic - OAM, S-OAM, and MPLS-TP OAM	483
Window Sweep	485
WIS	486
10 Test Functions	487
40/100G Advanced - CFP4/QSFP Control	490
40/100G Advanced - Lanes Mapping & Skew	494
APS	499
FDL - Bit-Oriented Message	502
FDL - Performance Report Message	506
FEAC	509
Filters	513
Packet Capture	517
OH - OTN	523
OH - SONET/SDH	529
Ping & Trace Route	543
Pointer Adjustment	548
RTD	558
RTD (CPRI Framed L2)	561
S-OAM Link Trace	563
Signaling Bits	565
Spare Bits	566
Traffic Scan	568

11 Test Control	571
Discover Remote Button	572
Headset/DTMF Button	575
Inject Button	576
Laser Button	576
Lpbk Tool Button (Loopback Tool)	577
Phone Book Button	584
Report Button	588
Reset Button	593
Save/Load Button	594
Start/Stop TX Button	598
12 Power Failure Recovery	599
Enabling Power Failure Recovery	600
When Using the Test Timer	601
13 Maintenance	603
Cleaning LC Connectors	604
Recalibrating the Unit	605
Recycling and Disposal (Applies to European Union Only)	606
14 Troubleshooting	607
Solving Common Problems	607
Contacting the Technical Support Group	608
Transportation	608
15 Warranty	609
General Information	609
Liability	609
Exclusions	609
Certification	610
Service and Repairs	611
EXFO Service Centers Worldwide	612
A Specifications	613
General Specifications	614

B Glossary	615
Acronym List	615
10G Ethernet Client	632
1588 PTP	635
CPRI	641
Ethernet Cables	646
G.709 Optical Transport Network (OTN)	648
MPLS Labels	665
SONET/DSn/SDH/PDH	666
SyncE	676
Unicast/Multicast Addresses for Ethernet OAM	678
VLAN ID and Priority	679
Index	681

Certification Information

North America Regulatory Statement

This unit was certified by an agency approved in both Canada and the United States of America. It has been evaluated according to applicable North American approved standards for product safety for use in Canada and the United States.

Electronic test and measurement equipment is exempt from FCC part 15, subpart B compliance in the United States of America and from ICES-003 compliance in Canada. However, EXFO Inc. makes reasonable efforts to ensure compliance to the applicable standards.

The limits set by these standards are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the user guide, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

European Community Declaration of Conformity

Warning: This is a class A product. In a domestic environment, this product may cause radio interference in which case the user may be required to take adequate measures.

An electronic version of the declaration of conformity for your product is available on our website at www.exfo.com/library.

Laser



Your instrument is a Class 1 laser product in compliance with standards IEC 60825-1: 2007 and 21 CFR 1040.10, except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007.

1 **Introducing the High Speed Portable Field Tester**

ALL-IN-ONE Ethernet/optical solution for field technicians installing, testing and troubleshooting FTTx, fronthaul, backhaul, small-cell, DAS, remote radio head and data center networks, in addition to OTN, SONET/SDH, Ethernet, Fibre Channel, CPRI/OBSAI and SyncE/1588 PTP services, with the added support of OTDR and iOLM capabilities.

Features

Features		Model				
		870v2 870Q	880v2 880Q	720Gv2 730Gv2	890	890NGE
Intelligent Apps.	iOptics	X	X	X	X	X
	iSAM	X	X	X	X	X
Transport	OTN BERT	X	X	X	X	X
	SONET/SDH BERT	X	X	X	X	X
	DSn/PDH BERT	X	X	X	-	X
	SONET/SDH - DSn/PDH BERT	X	X	X	-	X
	NI/CSU Emulation	X	X	X	-	X
	ISDN PRI	X	X	X	-	X
Ethernet	EtherSAM (Y.1564)	X	X	X	X	X
	RFC 6349	X	X	X	X	X
	RFC 2544	X	X	X	X	X
	EtherBERT	X	X	X	X	X
	Traffic Gen & Mon	X	X	X	X	X
	Smart Loopback	X	X	X	X	X
	Through Mode	X	X	X	X	X
	TCP Throughput	X	X	X	X	X
	Carrier Ethernet OAM	X	X	X	X	X
	Cable Test	X	X	X	-	X

Introducing the High Speed Portable Field Tester

Technical Specifications

Features		Model				
		870v2 870Q	880v2 880Q	720Gv2 730Gv2	890	890NGE
Packet Sync	1588 PTP	X	X	X	X	X
	SyncE	X	X	X	X	X
Fibre Channel	FC BERT	X	X	X	X	X
Wireless	CPRI/OBSAI BERT	X	X	X	X	X
OTDR and iOLM	OTDR	-	-	X	-	-
	iOLM	-	-	X	-	-

Technical Specifications

To obtain this product’s technical specifications, visit the EXFO Web site at *www.exfo.com*.

Conventions

Before using the product described in this guide, you should understand the following conventions:



WARNING

Indicates a potentially hazardous situation which, if not avoided, could result in *death or serious injury*. Do not proceed unless you understand and meet the required conditions.



CAUTION

Indicates a potentially hazardous situation which, if not avoided, may result in *minor or moderate injury*. Do not proceed unless you understand and meet the required conditions.



CAUTION

Indicates a potentially hazardous situation which, if not avoided, may result in *component damage*. Do not proceed unless you understand and meet the required conditions.



IMPORTANT

Refers to information about this product you should not overlook.

2 ***Safety Information***



WARNING

Do not install or terminate fibers while a light source is active. Never look directly into a live fiber and ensure that your eyes are protected at all times.




WARNING

The use of controls, adjustments and procedures, namely for operation and maintenance, other than those specified herein may result in hazardous radiation exposure or impair the protection provided by this unit.



IMPORTANT

When you see the following symbol on your unit , make sure that you refer to the instructions provided in your user documentation. Ensure that you understand and meet the required conditions before using your product.



IMPORTANT


Other safety instructions relevant for your product are located throughout this documentation, depending on the action to perform. Make sure to read them carefully when they apply to your situation.

Safety Information

Additional Laser Safety Information

Additional Laser Safety Information

This product employs Class 1 Laser transceivers.



WARNING

When the LASER LED is on or flashing, the 700Gv2/800v2/890 Series is transmitting an optical signal on the SFP/SFP+, CFP4, or QSFP transceiver ports.

Note: *Refer to the OTDR, iOLM, and FTB-1v2 Pro user guides for additional test equipment safety information and ratings.*

Installation Instruction Warnings



CAUTION

When you use the unit outdoors, ensure that it is protected from liquids, dust, direct sunlight, precipitation, and full wind pressure.



CAUTION

Except for the dual Bantam connector and the RJ-48C port, all telecom (electrical) interfaces are SELV (Safety Extra Low Voltage) circuitry intended for intra-building use only.



CAUTION

For the dual Bantam connector and the RJ-48C ports, use only No. 26 AWG or larger telecommunication line cord to reduce the risk of fire.



CAUTION

No user serviceable parts are contained inside. Contact the manufacturer regarding service of this equipment.



IMPORTANT

All wiring and installation must be in accordance with local building and electrical codes acceptable to the authorities in the countries where the equipment is installed and used.



WARNING

Use only accessories designed for your unit and approved by EXFO.

Safety Information

Installation Instruction Warnings



CAUTION

Electrostatic Discharge (ESD) Sensitive Equipment:

Plug-in modules can be damaged by static electrical discharge. To minimize the risk of damage, dissipate static electricity by touching a grounded unpainted metal object

- before removing, inserting, or handling the module.
- before connecting or disconnecting cables to/from the NetBlazer V2 Series.
- before inserting or removing **SFP/SFP+**, **CFP4**, or **QSFP** transceiver to/from the NetBlazer V2 Series.

3 **Getting Started**

If the NetBlazer V2 Series has been purchased at the same time as the FTB-1v2 Pro, the 700Gv2/800v2/890 Series module is pre-installed with the appropriate software version. If the NetBlazer is not already installed, refer to the FTB-1v2 Pro User Guide for more information on how to install the module.

Turning On the Unit

Turn on the FTB-1v2 Pro. Refer to the FTB-1v2 Pro user guide for more information.

Starting the NetBlazer V2 Series Application

The module can be configured and controlled by starting the application(s) as described in the following table.

Module	Application	Comment
870v2 880v2	NetBlazer OpticalRF	Only one application can run at once.
720Gv2 730Gv2	NetBlazer OpticalRF OTDR iOLM	NetBlazer/OpticalRF and OTDR/iOLM applications can run simultaneously.
870Q 880Q	NetBlazer – A OpticalRF – A NetBlazer – B	An application for each part of the module. Both A and B applications can run simultaneously. Only one – A application can run at once, either NetBlazer – A or OpticalRF – A .
890NGE	NetBlazer – 100G NetBlazer – 10G OpticalRF – 10G	An application for each part of the module. Only one application can run at once.
890	NetBlazer	

Getting Started

Starting the NetBlazer V2 Series Application

To start the application:

From **Mini ToolBox X** tap the desired application button.

Note: *Refer to respective user guide for more information on OpticalRF, OTDR, and iOLM applications.*

4 *Physical Interfaces and LEDs*

This section describes all connectors (ports) and LEDs available on the 700Gv2/800v2/890 Series.




CAUTION

To prevent exceeding the maximum input/output power level, please refer to this product's technical specifications at www.exfo.com.

FTB-870v2 and FTB-870Q Modules

The FTB-870Q module provides twice the amount of ports and capabilities than the FTB-870v2 module. It is divided into two parts labeled **A** and **B** respectively.

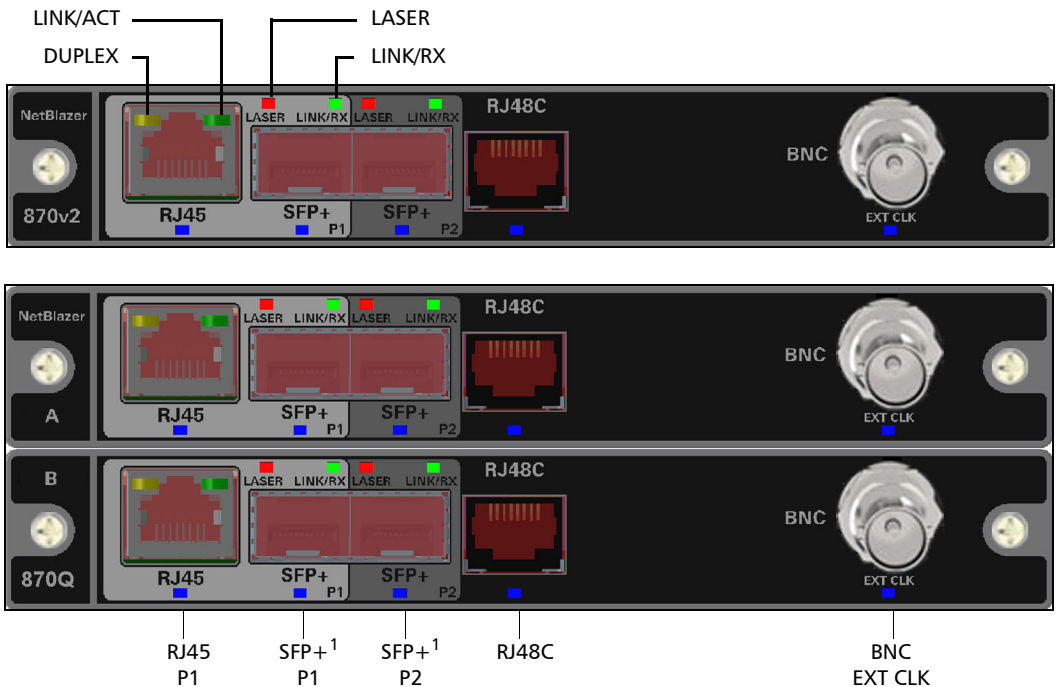


1. Laser radiation emitted from this port when LASER LED is on.

FTB-880v2, 880Q, 720Gv2, 730Gv2 Modules


The FTB-880Q module provides twice the amount of ports and capabilities than the FTB-880v2 module. It is divided into two parts labeled **A** and **B** respectively.

Note: *FTB-880v2 and FTB-880Q are shown below as examples for connector location purposes. The FTB-720Gv2 and FTB-730Gv2 modules use the same connector disposition in addition to OTDR specific connectors that are described in the OTDR user guide.*

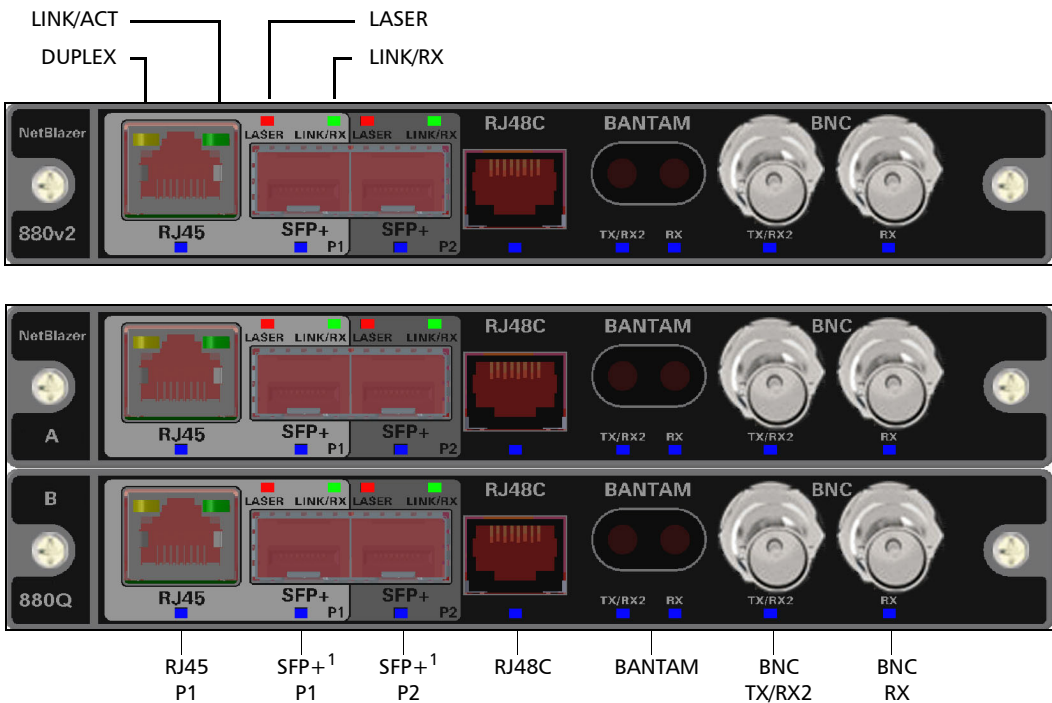

1. Laser radiation emitted from this port when LASER LED is on.

FTB-890, 890NGE Modules

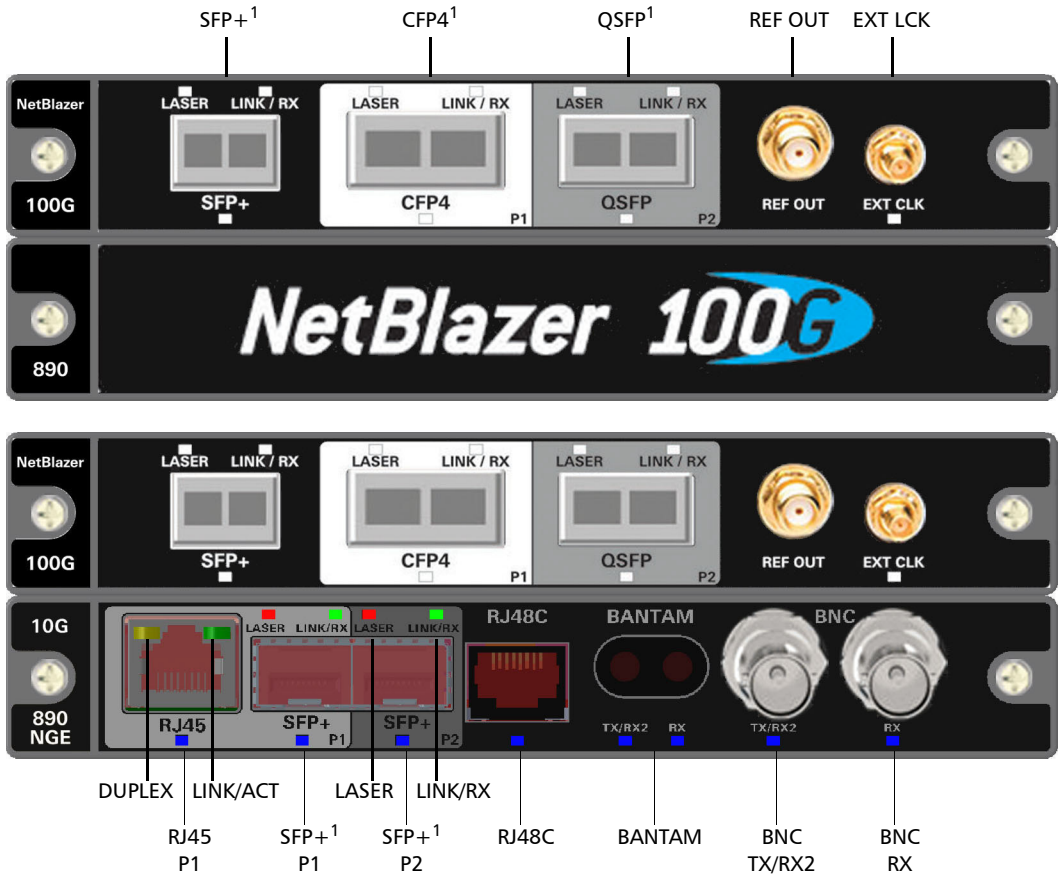

Physical Interfaces and LEDs

Port Availability on the 700Gv2/800v2/890 Series

Port Availability on the 700Gv2/800v2/890 Series

The following table shows the list of available ports as well as a description and signals supported for each module.

Port Labelled	Description and supported signal(s)	870v2 870Q	880v2 880Q 720Gv2 730Gv2 890NGE (10G)	890 890NGE (100G)
BANTAM TX/RX2 RX	TX and RX: DS1/1.5M, E1/2M RX2: DS1/1.5M Clock IN/OUT: DS1/1.5M, E1/2M, 2MHz	-	X	-
BNC TX/RX2	TX: E1/2M, E3/34M, DS3/45M, STS-1e/STM-0e/52M, E4/140M, STS-3e/STM-1e/155M RX2: DS3 Clock OUT: DS1/1.5M, E1/2M, 2MHz	-	X	-
BNC RX	E1/2M, E3/34M, DS3/45M, STS-1e/STM-0e/52M, E4/140M, STS-3e/STM-1e/155M Clock IN: DS1/1.5M, E1/2M, 2MHz, 1 PPS ^a	-	X	-
BNC EXT CLK	Clock IN: DS1/1.5M, E1/2M, 2MHz, 1 PPS ^a	X	-	-
EXT CLK	Clock IN (SMB): DS1/1.5M, E1/2M, 2MHz, 1 PPS ^a	-	-	X
REF OUT	Electrical port SMA for eye diagram clock signal generation	-	-	X
RJ45 P1	Ethernet 10/100/1000 Mbit/s electrical	X	X	-
RJ48C	DS1/1.5M, E1/2M	X	X	-
	Clock IN: DS1/1.5M, E1/2M, 2MHz			
	Clock OUT: DS1/1.5M, E1/2M, 2MHz	-	X	-

Physical Interfaces and LEDs

Port Availability on the 700Gv2/800v2/890 Series

Port Labelled	Description and supported signal(s)	870v2 870Q	880v2 880Q 720Gv2 730Gv2 890NGE (10G)	890 890NGE (100G)
SFP+ P1	Ethernet 100 Mbit/s, 1000 Mbit/s, 10 Gbit/s optical CPRI 1.2, 2.4, 3.1, 4.9, 6.1, 9.8 Gbit/s OBSAI 3.1 Gbit/s Fibre Channel 1X/2X/4X/8X/10X OC-1/STM-0, OC-3/STM-1, OC-12/STM-4, OC-48/STM-16, OC-192/STM-64 OTU1, OTU2, OTU1e, OTU2e, OTU1f, OTU2f	X ^b	X ^b	X
	Ethernet 10/100/1000 Mbit/s electrical (using active copper SFP Fibre Channel 16X	-	-	X
SFP+ P2	Ethernet 100 Mbit/s, 1000 Mbit/s, 10 Gbit/s optical Ethernet 10/100/1000 Mbit/s electrical (using active copper SFP) CPRI 1.2, 2.4, 3.1, 4.9, 6.1, 9.8 Gbit/s OBSAI 3.1 Gbit/s Fibre Channel 1X/2X/4X/8X/10X	X	X	-
CFP4	Ethernet 100 Gbit/s OTU4	-	-	X
QSFP	QSFP+ transceiver ^c : Ethernet 40 Gbit/s OTU3e2, OTU3e1, OTU3	-	-	X
	QSFP28 transceiver ^c : Ethernet 100 Gbit/s OTU4	-	-	X

- a. Available for **Dual Test Set - One-Way Latency** measurement mode.
- b. Port **SFP+ P2** is used with OC-192/STM-64 in **Decoupled (TX≠RX)** mode.
- c. Only parallel interfaces are supported.

CFP4 and QSFP Interfaces

The 890/890NGE provides one CFP4 and one QSFP interface slot that can be used with respectively CFP4 and QSFP (QSFP+ or QSFP28) transceivers.



CAUTION

Before inserting an optical module into the CFP4 or QSFP interface slot, inspect the slot to make sure nothing is inside.

Note: *Do not replace the transceiver while the test is running to avoid distorting results. First stop the test, replace the transceiver, select the connector type (refer to Modify Structure Button on page 100), and then restart the test.*



WARNING

Use only EXFO supported CFP4/QSFP transceivers. Refer to this product's technical specifications at www.exfo.com for the list of supported transceivers. Using non-supported transceivers can affect the performance and accuracy of the test.

SFP+ (P1/P2)

These ports can be used for the following test applications and rates:

Application	Rates	PORT	
		1	2
Transport	OC-1/STM-0, OC-3/STM-1, OC-12/STM-4, OC-48/STM-16, OTU1, OC-192/STM-64 ^a , OTU2, OTU1e, OTU2e, OTU1f, OTU2f	X	
Ethernet	100 Mbit/s, 1000 Mbit/s, 10 Gbit/s LAN/WAN	X	X
	10/100/1000 Mbit/s electrical (using active copper SFP)	X ^b	X ^c
Packet Sync	100 Mbit/s, 1000 Mbit/s, 10 Gbit/s LAN	X	X
	10/100/1000 Mbit/s electrical (using active copper SFP)	X ^b	-
Fibre Channel	1X, 2X, 4X	X	X
Wireless	CPRI 1.2, 2.4, 3.1, 4.9, 6.1, 9.8 Gbit/s; OBSAI 3.1 Gbit/s.	X	X

- a. Port 2 is used with OC-192/STM-64 in **Decoupled (TX≠RX)** mode.
- b. Only available on 890 and 890NGE (100G).
- c. Available as a second port when the test application requires two ports.

Plug the SFP/SFP+ transceiver into the P1/P2 slot.



WARNING

Use only EXFO supported transceivers. Refer to this product's technical specifications at www.exfo.com for the list of supported transceivers. Using non-supported transceivers can affect the performance and accuracy of the test.

Note: Do not replace the SFP/SFP+ while the test is running to avoid distorting statistics. First stop the test case, replace the SFP/SFP+ and then restart the test.

RJ45

This port can be used for electrical Intelligent Apps, Ethernet, or Packet Sync test applications.

Supported electrical rates are 10Mbps/s, 100 Mbit/s, and 1000 Mbit/s. 10 Mbps/s is not supported for SyncE. Plug the 10/100/1000 electrical interface or the cable to be tested to the RJ45 P1 connector. The electrical ports is RJ45 for category 5 unshielded twisted pair (UTP). Refer to *Ethernet Cables* on page 646 for cable specifications.

BNC (TX/RX2 and RX)

This port can be used for electrical Transport test applications, DS1/DS3 dual RX, or clock synchronization.

Supported electrical signal are E1/2M, E3/34M, DS3/45M, STS-1e/STM-0e/52M, E4/140M, and STS-3e/STM-1e/155M for TX/RX test application; DS1/DS3 for dual RX test application; DS1/1.5M, E1/2M, 2MHz for clock output; DS1/1.5M, E1/2M, 2MHz, 1PPS¹ for clock input. Plug the signal to be tested to the BNC or TX/RX2 and RX ports; RX2 is used as the second input port for DS1/DS3 dual RX test. Connector type is BNC for coaxial 75-ohm cable connection.

BNC (EXT CLK)

This port can be used for external input clock synchronization: DS1 (1.5M), E1 (2M), 2MHz, or 1PPS signal. Connector type is BNC for coaxial 75-ohm cable connection. An adapter cable (BNC to Bantam) is required for Bantam connection (not supplied).

1. 1PPS is available for Dual Test Set in One-Way Latency measurement mode.

RJ48C

This port can be used for electrical Transport test applications or for clock IN/OUT synchronization. Supported electrical signal are DS1/1.5M and E1/2M for TX/RX test application; DS1/1.5M, E1/2M, 2MHz for clock IN/OUT on 880v2/880Q. Plug the signal to be tested to RJ48C port.

BANTAM

This port can be used for electrical Transport test application or for clock IN/OUT synchronization.

Supported signal are DS1/1.5M and E1/2M for TX/RX test application and DS1/1.5M, E1/2M, 2MHz for clock synchronization. Plug the signal to be tested to the BANTAM IN and OUT TX and RX ports.


Headset/Microphone Port (FTB-1v2)



CAUTION

When using speech over ISDN (ISDN PRI test application), use only the headset supplied by EXFO to ensure adequate protection.

The headset port can be used with the ISDN PRI test application to connect a headset allowing to talk and listen when calls are made and received.

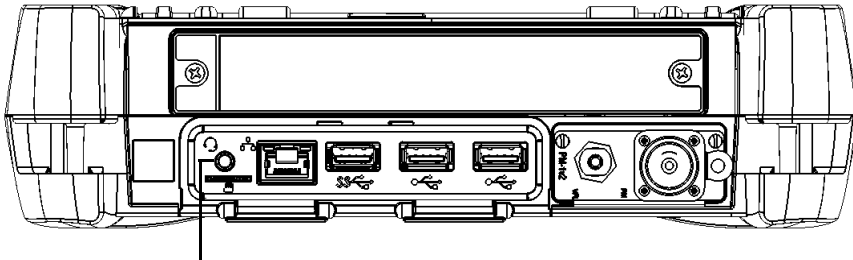

Headset/microphone port

Note: Refer to *FTB-1v2 User Guide* for instructions on configuring the *Headset/Microphone settings*.

Fibre Cables Connection

Carefully connect optical fibre cables to the SFP/SFP+'s IN and OUT ports. To ensure good signal quality, make sure that the optical fibre connector is fully inserted into the optical connector port.



CAUTION

To prevent exceeding the maximum input power level please use an attenuator when a loopback configuration is used.

EXT CLK

The 890/890NGE provides one connector, labeled **EXT CLK** that can be used either for input/output external clock DS1 (1.5M), E1 (2M), 2MHz, or 1PPS (input only) synchronization signal. 1PPS is available for **Dual Test Set** in **One-Way Latency** measurement mode. The connector type is SMB for coaxial 75-ohm cable connection. An adapter cable (SMB to Bantam) is required for Bantam connection (not supplied).

REF OUT

The 890/890NGE provides a connector, labelled **REF OUT**, for eye diagram clock signal generation that can be used by another equipment. The clock connector type is SMA.

LEDs


- **LASER** red LED is on when the 700Gv2/800v2/890 Series is emitting an optical laser signal.
- **LINK/RX** green LED is on when the link is up, off when the link is down, and flashing when frames are transmitted and/or received.
- **DUPLEX** green LED is on for Full Duplex mode, off for Half Duplex mode, and flashing when collisions are detected.
- Port blue LED is on when this port is selected for the test, and flashing when this port is selected for clock input.

5 Graphical User Interface Overview

This chapter describes the NetBlazer V2 Series graphical user interface.

Main Application Window

The following main application window is displayed when the NetBlazer V2 Series application is started.

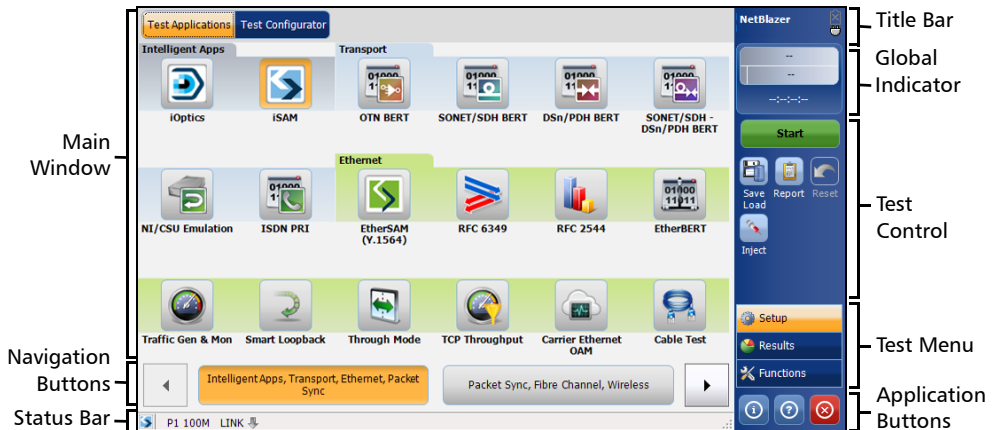

Main Window

The main window allows to setup a test and to view the test status and results.


Navigation Buttons








Navigation buttons appear when there is not enough room on one page to display all available test applications. The left and right arrow buttons allow to respectively access the previous or next window. The buttons in between the left and right arrow buttons allow to directly select the window for the type of test application listed.

Graphical User Interface Overview

Status Bar




The status bar displays the following information.

Icon and/or text	Description	Test Application
Test icon	Icon representing the active test application.	All
P1, P2	Port number (Port 1 or Port 2)	All
TX/RX, TX, RX	Indicates the direction of the signal per port.	Transport
Interface/ Signal	The interface or signal rate per port: 1GE Optical, OTU1, OTU2, etc.	All
(BTS) or (RRH)	BTS: Emulation mode is Base Station RRH: Emulation mode is Remote Radio Head	CPRI/OBSAI BERT
LINK	Green arrow: Link up. Red arrow: Link down. Gray arrow: Awaiting incoming data to provide a status.	Transport Ethernet Fibre Channel CPRI/OBSAI BERT
PTP	For G.8265.1: Green arrow: Signaling requests granted. Red arrow: Request denied, session canceled, or no reply. Gray arrow: Pending, inactive, or link down. Refer to <i>Negotiation Status</i> on page 424 for more information.	1588 PTP
	For G.8275.1: Green arrow: Announce, Sync, and Follow-up are received according with their respective interval. Red arrow: Announce, Sync, or Follow-up are not received. Gray arrow: Pending.	
ESMC	Green arrow: ESMC valid information frame received. Red arrow: No ESMC valid information frames received. Gray arrow: Pending state. Refer to <i>ESMC Monitoring</i> on page 291 for more information.	SyncE
D-Channel	The channel used as the D-channel to transmit signalling information. Green arrow: Link up Red arrow: Link down.	ISDN PRI
	Headset and DTMF is connected to B-Channel #x. Automatically muted for Data type B-Channels.	ISDN PRI

Icon and/or text	Description	Test Application
Power level	The received signal level per port in dBdsx for DSn signal or dBm for PDH and optical signals. For Transport electrical interface, LOS on red background indicates that there is no electrical signal power. For optical interface, the following background color are used as power level qualifier: Green with "Power": Power level in range ^a . Yellow: Power level out-of-range ^b . Red with "LOS": Loss of signal ^b . Red with "Power": Power level is close to damage. Gray: The operational range value is either not available or not supplied by the transceiver.	All except Cable Test
Amplitude	Amplitude indicates the received signal amplitude per port. Only available with electrical interfaces.	Transport
	Laser ON ^b . The laser icon is not displayed when the laser is off ^a . The laser icon is only displayed for optical interfaces. The laser is ON by default when the test is created. The laser control is not affected when turning off the laser by generating a LOS for example. Refer to <i>Laser Button</i> on page 576.	All
	The status of the received signal pattern per port: Green: Pattern is synchronized. Red: Loss of pattern. Gray: Test is not running (EtherBERT test) or the No Pattern Analysis (Live) check box is selected.	Transport EtherBERT Fibre Channel Wireless
	Connection established between two testing units in Dual Test Set (DTS) , EXFO Worx Interop , or in Loop Up mode.	Ethernet
	Connection not established between two testing units in Dual Test Set (DTS) , EXFO Worx Interop , or in Loop Up mode.	Ethernet
	Remote unit is busy (locked) in EXFO Worx Interop operation mode.	Ethernet
	Loopback Tool enabled on the port unused by the main test application.	Ethernet
	Clock synchronization signal clock. The clock icon is followed by the clock mode: INT for Internal, EXT for External, or RCV for Recovered. AUTO is displayed for dual port test when a different clock is used on each port. Green: Clock Synchronized. Red: Loss of clock.	Transport Ethernet Fibre Channel Wireless

Graphical User Interface Overview

Title Bar

Icon and/or text	Description	Test Application
	Indicates a manual change in the OH bytes transmitted. Not displayed when using the default OH values.	Transport
	The test is in loopback mode. Not displayed when not in loopback mode.	NI-CSU Emulation
	Alarm/error is currently injected. Not displayed when there is no alarm/error injection.	Transport EtherBERT Carrier Ethernet OAM Fibre Channel Wireless

- a. For all lanes for parallel interface.
- b. For at least one lane for parallel interface.

The following status are also displayed:


- Battery/AC icons indicate the battery level and if the FTB-1v2 Pro is connected to an AC power source. Refer to the FTB-1v2 Pro user guide for more information.
- Date and Time indicate the current date and time.

Title Bar

The Title Bar displays the software application name and the battery level indicator.

Global Indicator

The global indicator area displays the global pass/fail verdict, global alarm, and the test duration.

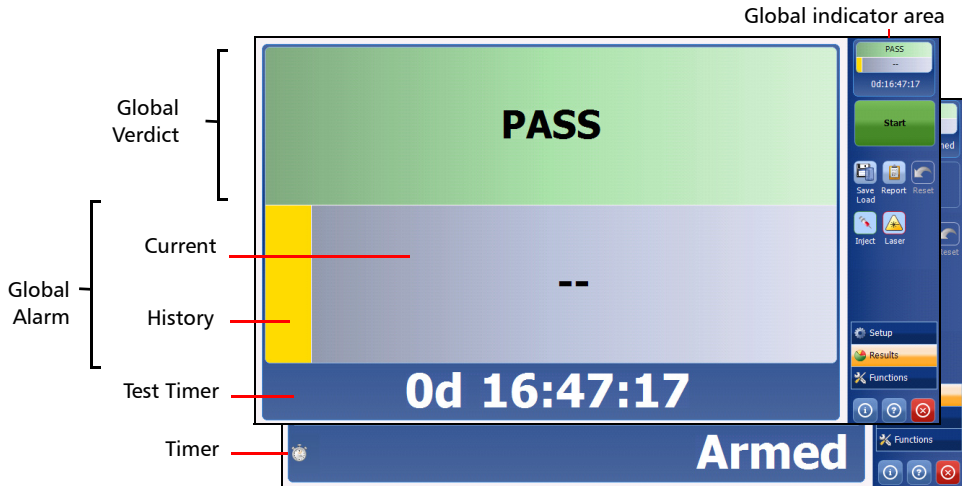

The global indicator area can be maximized for distant viewing. Tap anywhere within the global indicator area to display a maximized view. Tap again to exit the maximized view.

Global Verdict

Reports the global test verdict status when supported by the test application and enabled (when applicable).

Verdict	Description
PASS	PASS is displayed with a green background when all result values meet the configured threshold criteria.
FAIL	FAIL is displayed with a red background when any result value does not meet the configured threshold criteria or when a specific alarm is detected (refer to each test application for additional information).
--	-- is displayed with a gray background when at least one of the following conditions is met: <ul style="list-style-type: none">- Pass/Fail verdict is not enabled- there is no defined criterion- the test has not run yet.

Global Alarm

Indicates the current and history alarm/error status of the test.

Background color	Alarm/Error	Text displayed	Description
Gray	Current	--	No test result available.
	History		
Green	Current	No Alarm	No alarm/error has occurred in the last second.
	History		No alarm/error has occurred during the test.
Red	Current	Alarms or the name of the alarm.	An alarm/error occurred in the last second.
	History		
Amber	History		No current alarm/error but at least one alarm/error has occurred during the test.

Test Timer

The test timer without the timer icon indicates the time elapsed since the beginning of the test. No timer action is active. The test timer format is “day hour:minute:second”.

Timer

The timer icon with **Armed** indicates that a start time is active.

The timer icon with the Test Timer indicates that a duration and/or a stop time is active.

Test Control

Note: Refer to Test Control on page 571 for more information.

Test Menu

The test menu displays the following buttons:

- **Setup** allows to configure the selected test. Refer to *Test Setup - Test Configurator, Timer, and System* on page 89 for more information.
- **Results** allows to view test results. Refer to *Test Results* on page 305 for more information.
- **Functions** allows to configure additional test functions (refer to *Test Functions* on page 487).

Application Buttons

- **Help (?)** displays the help information related to the content of the active main window. It is also possible to navigate through the remainder of the help information.
- **Exit (x)** closes the application.
- **About (i)** mainly displays the product version details and technical support information.

Module Details button displays the NetBlazer V2 Series details such as its ID, Serial Number, Software Product Version, etc.

View Licence Agreement button displays the details of the product licence agreement.

Software Options button displays the list of software options.

Note: *For information on how to install and activate software options, refer to the FTB-1v2 Pro User Guide. The NetBlazer V2 Series application must be restarted once a new software option is installed in order to activate it. For 870Q and 880Q, the software options apply to both parts of the module: A and B.*

Software Option	Description
DSn	Digital Signal
DS1-FDL	DS1/1.5M Facility Data Link
DS3-FEAC	DS3/45M Far-End Alarm and Control
DUALRX	Dual RX
DS3-G747	ITU-T Recommendation G.747
PDH	Plesiochronous Digital Hierarchy
NI-CSU	NI/CSU Emulation
ISDN-PRI	Primary Rate North American and/or European ISDN
SONET	Synchronous Optical Network
SDH	Synchronous Digital Hierarchy
TCM	Tandem Connection Monitoring

Software Option	Description
OTU4	Optical Transport Unit-4 (111.81 Gbit/s)
OTU3-e1-e2	Optical Transport Unit-3 Overclocked (44.571/44.583 Gbit/s)
OTU3	Optical Transport Unit-3 (43.018 Gbit/s)
OTU2-1f-2f	Optical Transport Unit-2 Overclocked (11.270/11.317 Gbit/s)
OTU2-1e-2e	Optical Transport Unit-2 Overclocked (11.049/11.096 Gbit/s)
OTU2	Optical Transport Unit-2 (10.7 Gbit/s)
OTU1	Optical Transport Unit-1 (2.7 Gbit/s)
52M	52 Mbit/s
155M	155 Mbit/s
622M	622 Mbit/s
2488M	2.488 Gbit/s
9953M	9.953 Gbit/s
100optical	100 Mbit/s optical interfaces.
GigE_Optical	1000Base-T and GigE optical interfaces.
GigE_Electrical	1000Base-T electrical Interfaces.
10G_LAN	10G LAN optical interface.
10G_WAN	10G WAN optical interface.
40GE	Ethernet 40G
100GE	Ethernet 100G
FC-1X	Fibre Channel 1X
FC-2X	Fibre Channel 2X
FC-4X	Fibre Channel 4X
FC-8X	Fibre Channel 8X
FC-10X	Fibre Channel 10X
FC-16X	Fibre Channel 16X
IPV6	IPV6 testing (10GE and less)
IPv6_40-100GE	Internet Protocol Version 6 (IPv6) (40/100GE)
MPLS	MPLS Encapsulation (10GE and less)
MPLS_40-100GE	MPLS Encapsulation (40/100GE)
EoE	Ethernet over Ethernet Encapsulation (10GE)
EoE_40-100GE	Ethernet over Ethernet Encapsulation (40/100GE)
PBBTE	Provider Backbone Bridge Encapsulation (10GE)
PBBTE_40-100GE	Provider Backbone Bridge Encapsulation (40/100GE)
iOptics	Intelligent Pluggable Optic Test Application

Graphical User Interface Overview

Application Buttons

Software Option	Description
iSAM	Intelligent Service Activation Methodology
Cable_Test	Cable Test application
PoE	Power Over Ethernet
TCP-THPUT	TCP Throughput Test Application
CPRI-1.2G	CPRI 1.2288 Gbit/s
CPRI	CPRI 2.4576 Gbit/s and 3.072 Gbit/s
CPRI-4.9G	CPRI 4.9152 Gbit/s
CPRI-6.1G	CPRI 6.144 Gbit/s
CPRI-9.8G	CPRI 9.8304 Gbit/s
DP-CPRI	Dual Port CPRI
CPRI-Spectrum	RF Spectrum Analysis over CPRI
OBSAI	OBSAI 3.072 Gbit/s
1588PTP	1588 Precision Time Protocol Test Application
G82751	ITU-T G.8275.1 Profile
SyncE	Synchronous Ethernet Test Application
ETH-THRU	Through Mode test application.
TRAFFIC-SCAN	Traffic Scan
ETH-OAM	Carrier Ethernet OAM test application
LINK-OAM	Link OAM
TST-OAM	Test Over Service OAM
DUAL-PORT	Dual Port Test
RFC6349	RFC 6349 test application (10GE and less)
RFC6349_40-100GE	RFC 6349 test application (40/100GE)
RFC6349-EXFOWorx	EXFO Worx Interop Operation Mode
ETH-CAPTURE	Ethernet Frame Capture
ADV-FILTERS	Advanced filtering

Zoomed-In/Zoomed-Out Views







Some configuration and result blocks give access to zoomed views allowing more detailed configurations/results.

The block title contains the magnifier (+) icon when a zoomed view is available.

To zoom-in, tap the magnifier (+) icon or anywhere on the block.

To zoom-out, tap on the magnifier (-) icon or anywhere on the block title.

Arrow Buttons

	Moves to the top of the list.
	Moves one page up.
	Moves one line up.
	Moves one line down.
	Moves one page down.
	Moves to the end of the list.

Keyboard Usage

The GUI pops up different keyboards to modify data. Following are the usual keyboard keys:

- Left arrow moves the cursor one position to the left.
- Right arrow moves the cursor one position to the right.
- Up arrow increases the value by one.
- Down arrow decreases the value by one.
- **Del** deletes the value at the cursor position.
- **Back** deletes the value preceding the cursor position.
- **OK** completes data entry.
- **Cancel** closes the keyboard and discards the keyboard entry.
- **Previous...** allows the selection of previously configured values. This button is only available for certain fields like IP Address, MAC Address, etc.


Note: *For certain text fields, the GUI pops up or uses the unit's on-screen keyboard. Refer to the FTB-1v2 Pro user guide for more information on how to use it.*

For full keyboard, the **Back**, **Del**, **Shift**, and **Space** bar keys have the same functionality as a regular PC keyboard.

For multiplexing keyboard, tap on all mapped signals that have to be added/removed to/from the test path.

A mapped signal with an orange background color is part of the test path.

A mapped signal with a gray background color is not part of the test path.

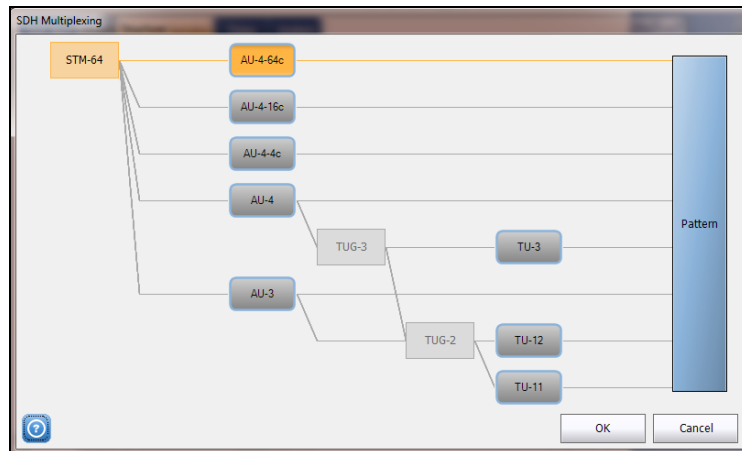

Graphical User Interface Overview

Keyboard Usage

The Trace message keyboard allows entering alphanumerical characters (ITU T.50) required for Trace fields. Tap the **Control Characters** button to access these characters.

ITU T.50 Characters					
b7 to b1	Character	Description	b7 to b1	Character	Description
000 0000	NUL	Null	001 0000	DLE	Data Link Escape
000 0001	SOH	Start Of Heading	001 0001	DC1	Device Control 1
000 0010	STX	Start of Text	001 0010	DC2	Device Control 2
000 0011	ETX	End of Text	001 0011	DC3	Device Control 3
000 0100	EOT	End Of Transmission	001 0100	DC4	Device Control 4
000 0101	ENQ	Enquiry	001 0101	NAK	Negative Acknowledge
000 0110	ACK	Acknowledge	001 0110	SYN	Synchronous idle
000 0111	BEL	Bell	001 0111	ETB	End of Transmission Block
000 1000	BS	Backspace	001 1000	CAN	Cancel
000 1001	HT	Horizontal Tabulation	001 1001	EM	End of Medium
000 1010	LF	Line Feed	001 1010	SUB	Substitute character
000 1011	VT	Vertical Tabulation	001 1011	ESC	Escape
000 1100	FF	Form Feed	001 1100	IS4	Information Separator 4
000 1101	CR	Carriage Return	001 1101	IS3	Information Separator 3
000 1110	SO	Shift-Out	001 1110	IS2	Information Separator 2
000 1111	SI	Shift-In	001 1111	IS1	Information Separator 1

6 Test Setup - Test Applications

The NetBlazer V2 Series offers the following test applications.

Type	Application	Available on FTB-...			Page
		870v2 870Q	880v2 880Q 720Gv2 730Gv2 890NGE (10G)	890 890NGE (100G)	
Intelligent Apps	<i>iOptics</i>	X	X	X	38
	<i>iSAM</i>	X	X	X	39
Transport	<i>OTN BERT</i>	X	X	X	40
	<i>SONET/SDH BERT</i>	X	X	X	42
	<i>DSn/PDH BERT</i>	X	X	-	45
	<i>SONET/SDH - DSn/PDH BERT</i>	X	X	-	47
	<i>NI/CSU Emulation</i>	X	X	-	50
	<i>ISDN PRI</i>	X	X	-	51
Ethernet	<i>EtherSAM (Y.1564)</i>	X	X	X	52
	<i>RFC 6349</i>	X	X	X	56
	<i>RFC 2544</i>	X	X	X	54
	<i>EtherBERT</i>	X	X	X	57
	<i>Traffic Gen & Mon</i>	X	X	X	59
	<i>Smart Loopback</i>	X	X	X	61
	<i>Through Mode</i>	X	X	X	63
	<i>TCP Throughput</i>	X	X	X	64
	<i>Carrier Ethernet OAM</i>	X	X	X	65
	<i>Cable Test</i>	X	X	-	67
Packet Sync	<i>1588 PTP</i>	X	X	X	69
	<i>SyncE</i>	X	X	X	70
Fibre Channel	<i>FC BERT</i>	X	X	X	71
Wireless	<i>CPRI/OBSAI BERT</i>	X	X	X	72


iOptics

iOptics test application provides a quick assessment of the proper operation of an optical transceiver before using it in a network or test environment. The validation is done by running sub-tests in addition to monitoring transceiver power consumption and temperature. Result and verdict are reported for each sub-test and monitoring task. Transceiver's manufacturing information is also automatically collected.

A fiber loopback patch cord is required to perform the test with applicable attenuation included to protect the optical device. Bidirectional (single fiber) transceivers are not supported since the iOptics test requires a loopback.

- Typical iOptics test application:

700Gv2/800v2/890 Series



- Supported Interfaces/Rates: 40G/100G/OTU3/OTU3e1/OTU3e2/OTU4 parallel interfaces and all serial interfaces up to 10G/OTU2f (refer to **Rate** on page 214 for more information).


iSAM

iSAM is a simplified version of EtherSAM that is centered around addressing turn-up of E-Line circuits (EVC). The objective of the test is to validate Carrier Ethernet-based services key performance indicators defined in MEF: Frame Delay (FD), Inter-Frame Delay Variation (IFDV), and Frame Loss Ratio (FLR). In addition the RFC 6349 subtest can be enabled to validate that the Ethernet service is able to properly carry TCP traffic.

The **iSAM** test has to be executed in conjunction with a remote module. The remote module can be either in loopback configuration for unidirectional testing or in EtherSAM **Dual Test Set** mode for bidirectional testing.

The **Dual Test Set** test allows bi-directional test between two compatible modules providing independent results for each test direction. The results from local-to-remote and remote-to-local are available on the local testing unit.

➤ Typical iSAM test applications:

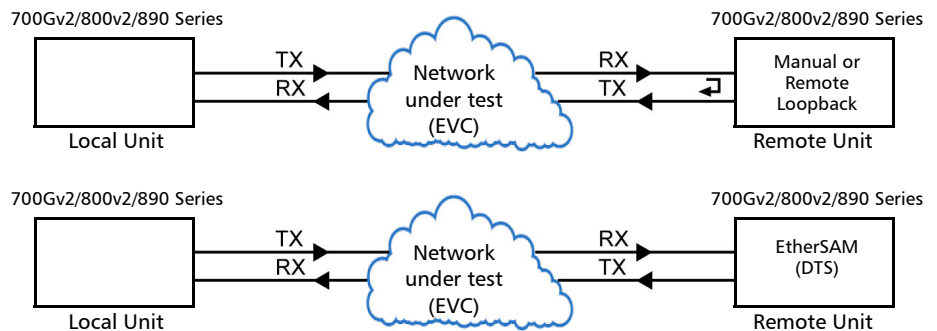


➤ Supported Interfaces/Rates: 10M to 100G.

OTN BERT


Allows OTN (framed and unframed) traffic generation with specific test pattern for Bit Error Rate analysis.

- Typical OTN BERT test applications:

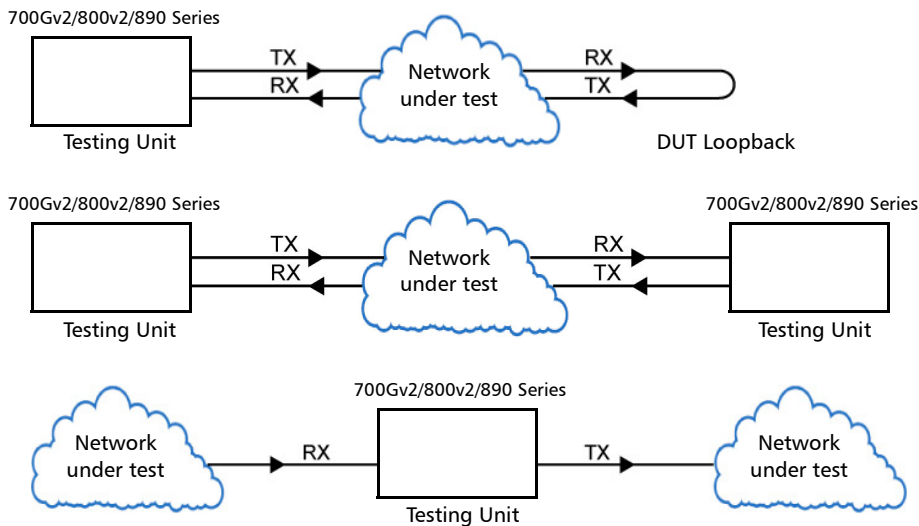

➤ Path/Mapping


The **OTN BERT** test application offers the following path/mapping structures depending on the inserted transceiver and enabled options.

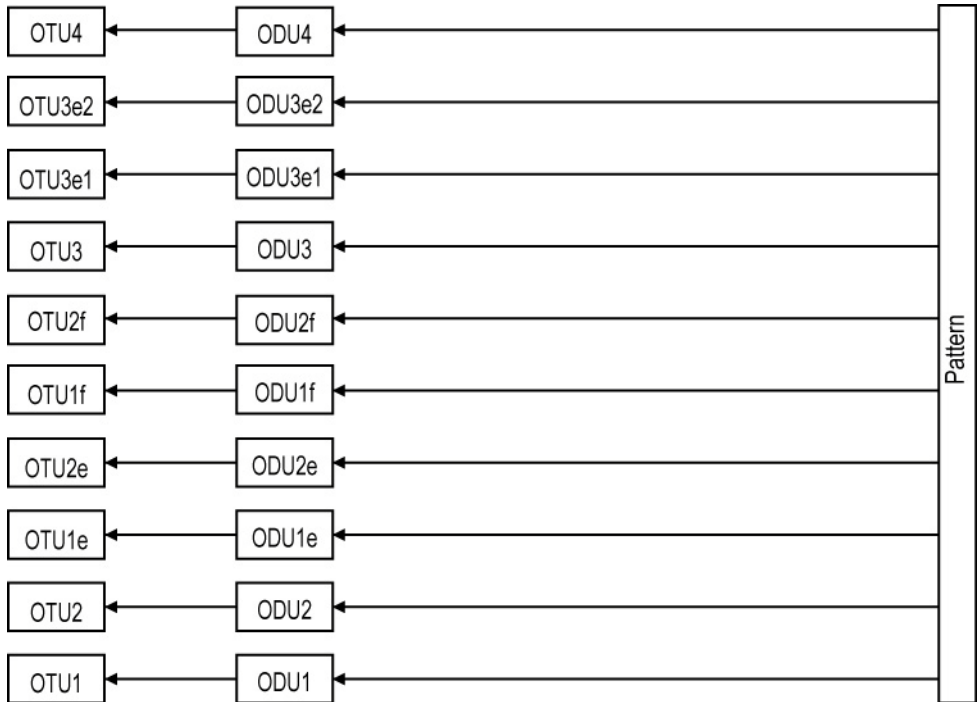

SONET/SDH BERT

Allows the validation of the SONET or SDH transport protocol by performing a BERT test to check the traffic or payload stability over a network facility.


- Typical SONET/SDH BERT test applications:

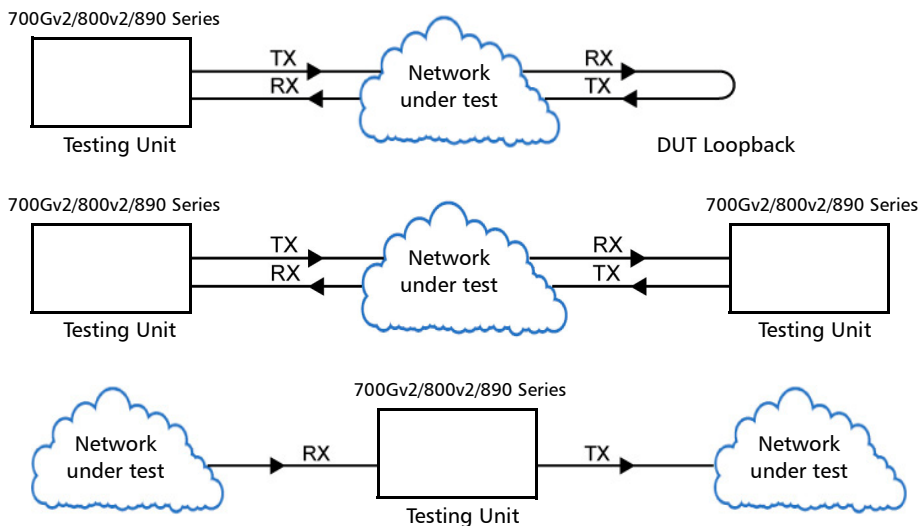

➤ Path/Mapping

The **SONET/SDH BERT** test application offers the following path/mapping structures depending on the inserted SFP/SFP+ transceiver, and enabled options.


For SONET BERT

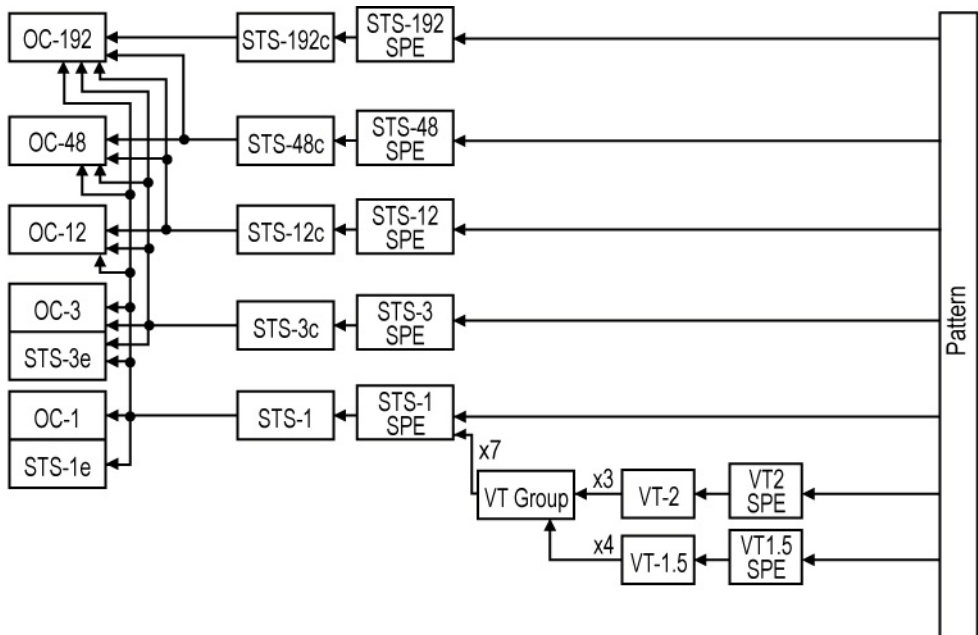

Test Setup - Test Applications

SONET/SDH BERT


For SDH BERT

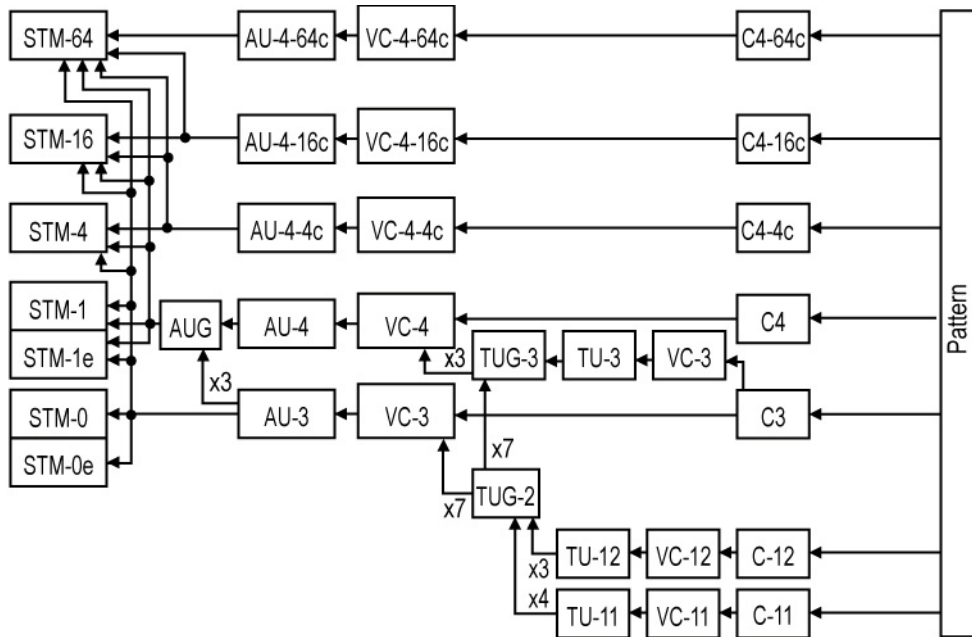

DSn/PDH BERT

Allows validation of the DSn or PDH transport protocol by performing a BERT test to check the traffic or payload stability over a network facility.

➤ Typical DSn/PDH BERT test applications:

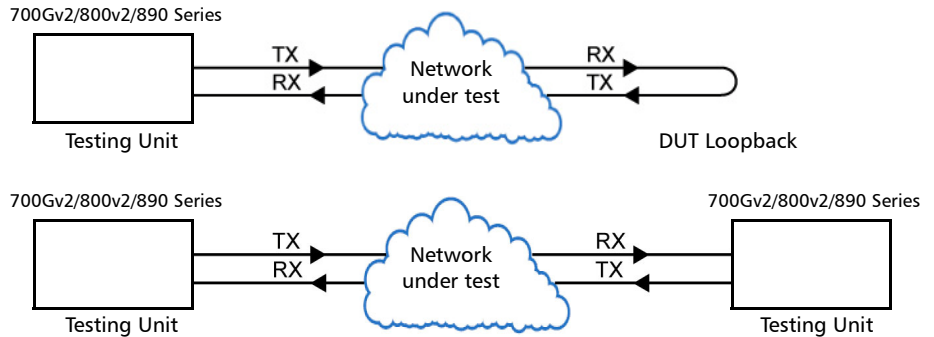


Test Setup - Test Applications

DSn/PDH BERT


➤ Path/Mapping

The **DSn/PDH BERT** test application offers the following path/mapping structures depending on model and enabled options.

For DSn:

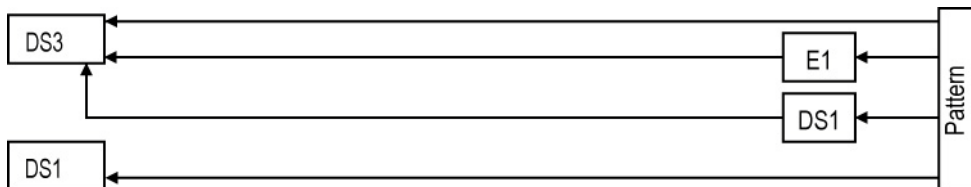


For PDH:

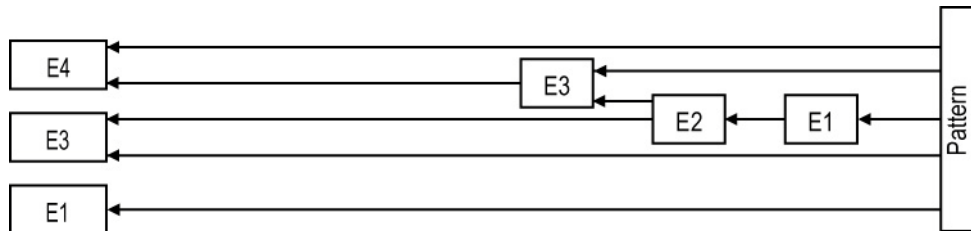

SONET/SDH - DSn/PDH BERT

Allows validation of the DSn or PDH embedded in SONET or SDH transport protocol by performing a BERT test to check the traffic or payload stability over a network facility.

- Typical SONET/SDH - DSn/PDH BERT test applications:

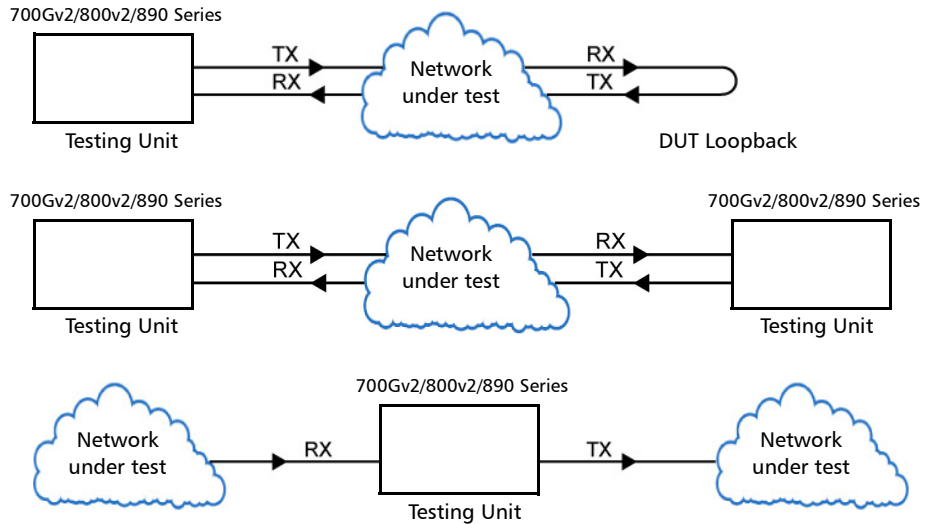


Test Setup - Test Applications

SONET/SDH - DSn/PDH BERT


➤ Path/Mapping

The **SONET/SDH - DSn/PDH BERT** test application offers the following path/mapping structures depending on the model and enabled options.

For SONET:

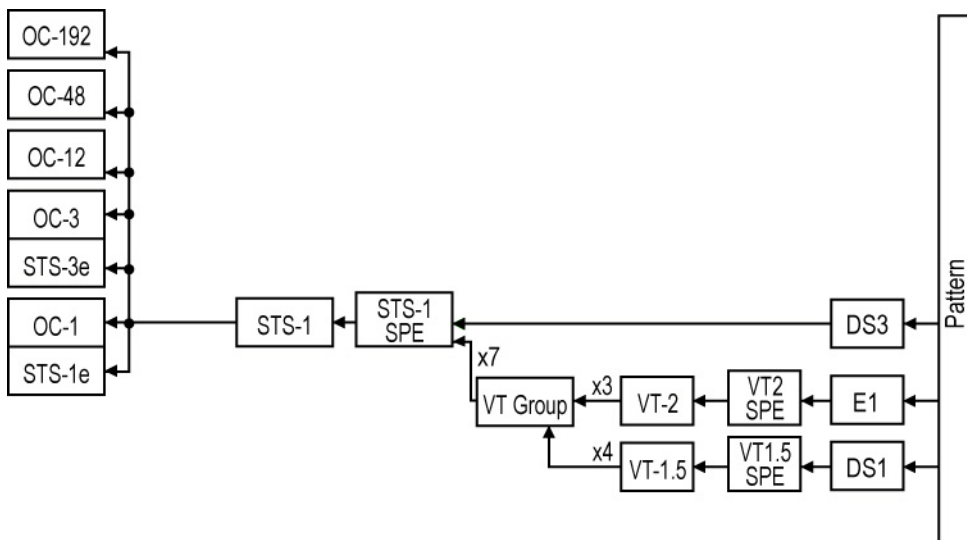


For SDH:

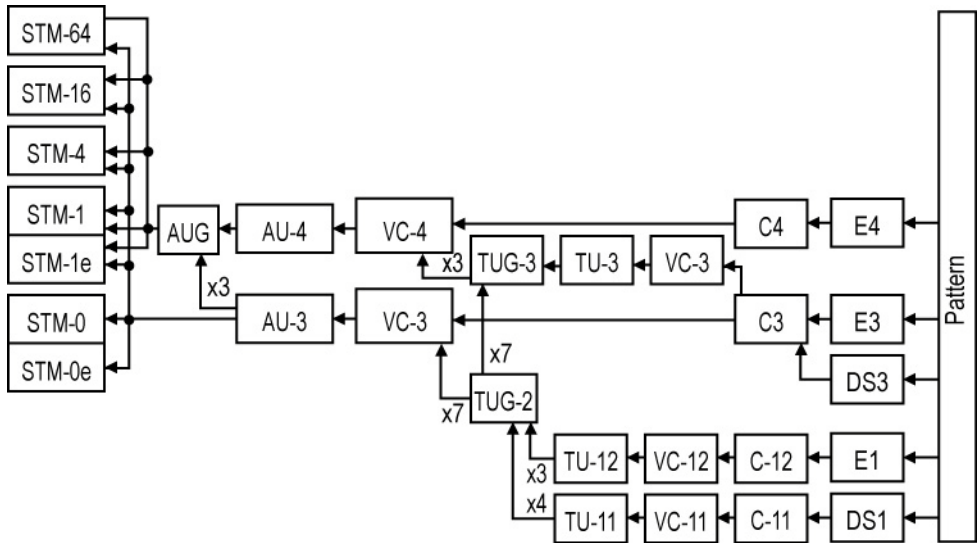

NI/CSU Emulation

Allows DS1 testing in NI/CSU (Network Interface/Customer Service Unit) emulation mode.


Typical NI/CSU Emulation test applications:

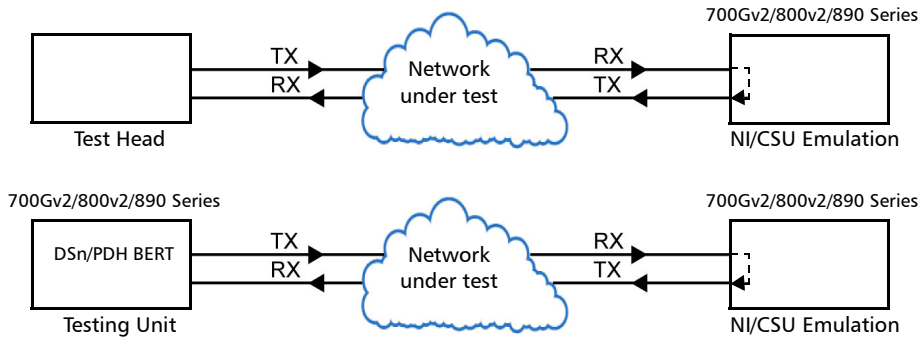

ISDN PRI

Allows to test and troubleshoot North American or European ISDN PRI configurations by calling one or all 23 DS1 or 30 E1 PRI channels. Once connected, the user can perform a channel-by-channel BERT, or talk and listen via a headset.

Typical ISDN PRI test applications:

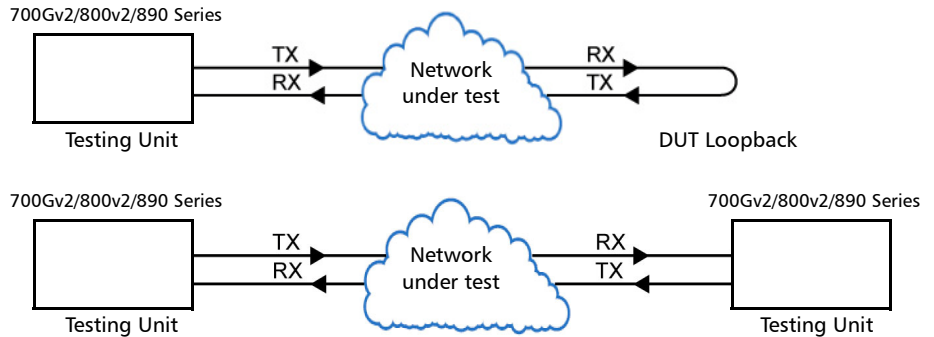

Note: For 870Q and 880Q modules, ISDN PRI is only available on part A of the module.

EtherSAM (Y.1564)


EtherSAM can simulate all types of services that will run on the network and simultaneously qualify all key SLA parameters for each of these services. Moreover, it validates the QoS mechanisms provisioned in the network to prioritize the different service types, resulting in more accurate validation and much faster deployment and troubleshooting.

The **EtherSAM (Y.1564)** test, in single port configuration, has to be executed in conjunction with a remote module. The remote module can be either in loopback configuration for unidirectional testing or in **EtherSAM Dual Test Set** mode for bidirectional testing.

The **Dual Test Set** test allows bi-directional test between two compatible modules providing independent results for each test direction. The results from local-to-remote and remote-to-local are available on the local testing unit.

The **Dual Port** topology allows simultaneous and bidirectional traffic generation and analysis at 100 percent wire-speed at any packet size. **Dual Port** topology is only available for rates up to 10G WAN.

➤ Typical EtherSAM (Y.1564) test applications:

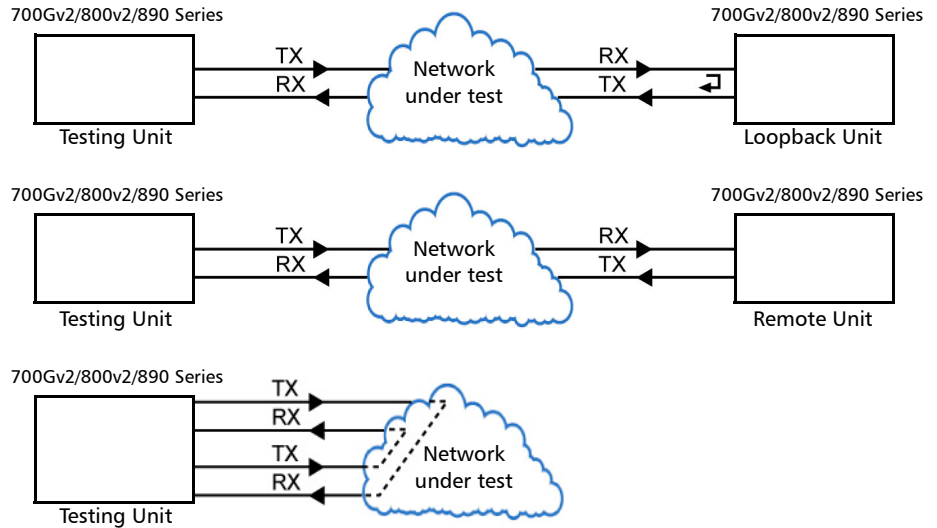

➤ Supported Interfaces/Rates: 10M to 100G.

RFC 2544


RFC 2544 allows Ethernet Throughput, Back-to-Back, Frame Loss, and Latency performance testing in accordance with RFC 2544 specifications.

The **RFC 2544** test, in single port configuration, has to be executed in conjunction with a remote module. The remote module can be either in loopback configuration for unidirectional testing or in RFC 2544 **Dual Test Set** mode for bidirectional testing.

The **Dual Test Set** test allows bi-directional test between two compatible modules providing independent results for each test direction. The results from local-to-remote and remote-to-local are available on the local testing unit.

The **Dual Port** topology allows simultaneous and bidirectional traffic generation and analysis at 100 percent wire-speed at any packet size. **Dual Port** topology is only available for rates up to 10G WAN.

➤ Typical RFC 2544 test applications:

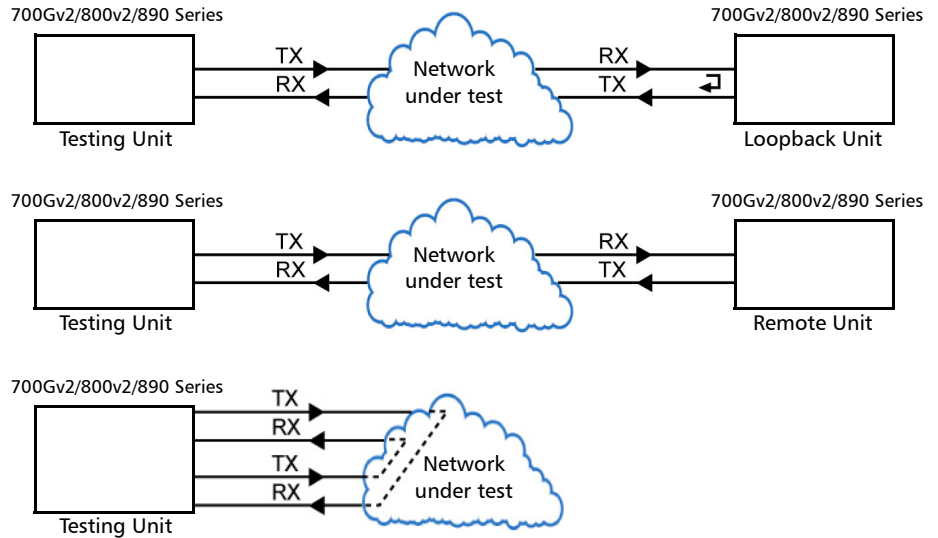


➤ Supported Interfaces/Rates: 10M to 100G.

RFC 6349

RFC 6349 is used to confirm that the Ethernet service is able to properly carry TCP traffic.

The **RFC 6349** test has to be executed in conjunction with a remote compatible module in RFC 6349 **Dual Test Set** or **EXFO|Worx Interop** operation mode allowing bidirectional testing. The test provides independent results for each test direction. The results from local-to-remote and remote-to-local are available on the local testing unit.

- Typical RFC 6349 test application:

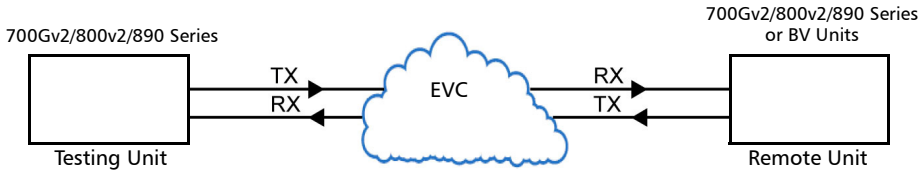


- Supported Interfaces/Rates: 10M to 10G LAN, 40G and 100G.

EtherBERT


Allows Ethernet Layer 1 up to Layer 4 and Unframed Layer 1 traffic generation with specific test pattern for Bit Error Rate analysis.

► Typical EtherBERT test applications:

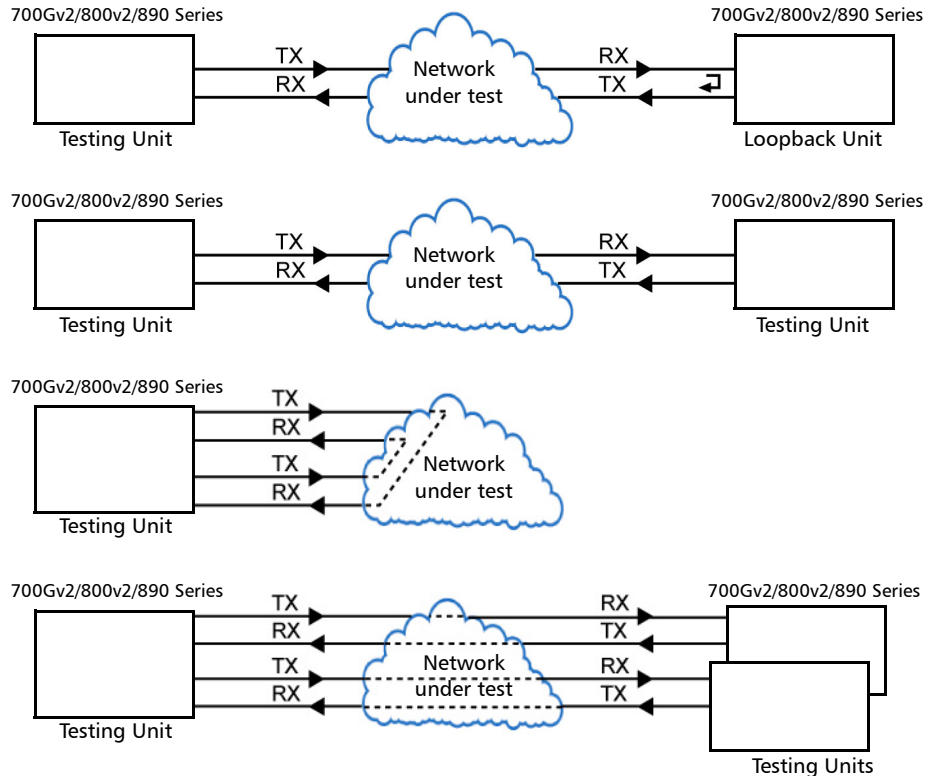

Test Setup - Test Applications

EtherBERT

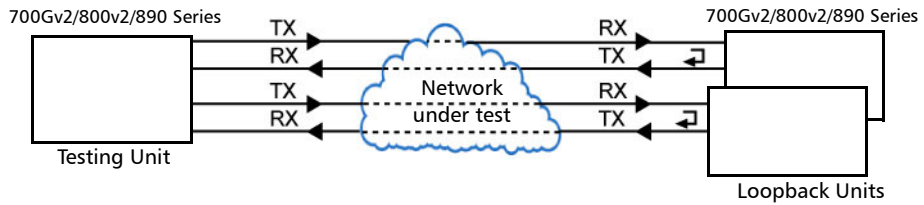


- Supported Interfaces/Rates: 10M to 100G. **Dual Port** topology is only available for rates up to 10G WAN.

Traffic Gen & Mon


Allows Ethernet traffic generation and analysis of up to 16 streams.

► Typical Traffic Gen & Mon test applications:

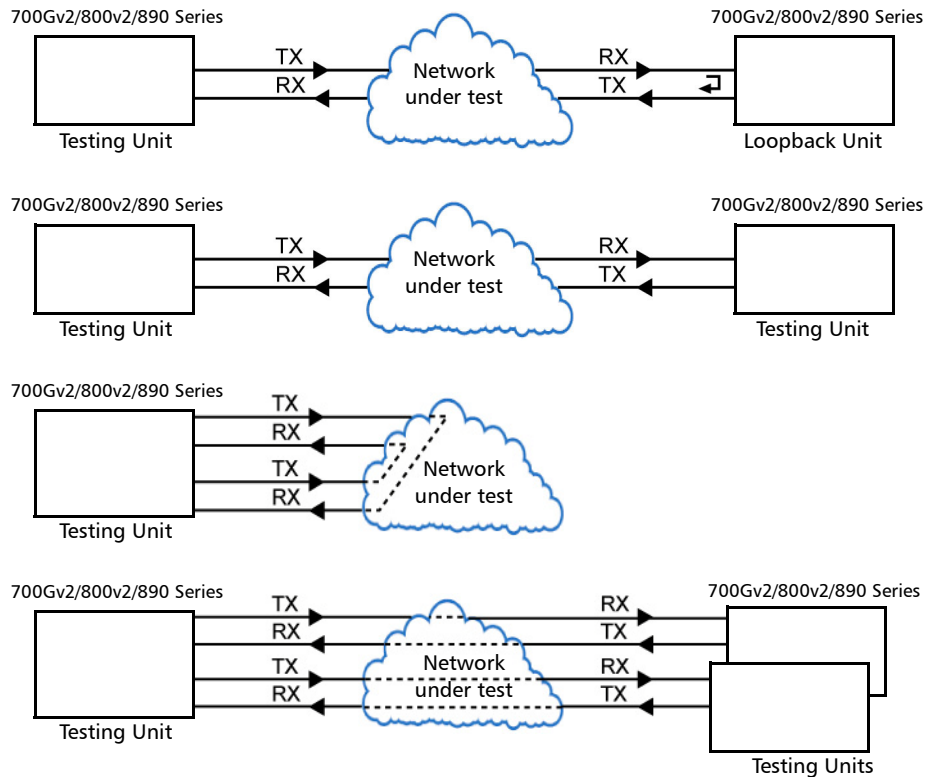

Test Setup - Test Applications

Traffic Gen & Mon

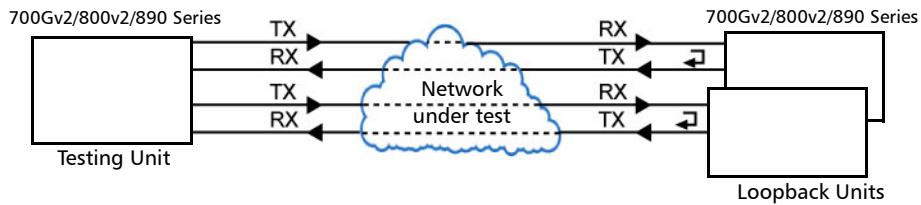


- Supported Interfaces/Rates: 10M to 100G. **Dual Port** topology is only available for rates up to 10G WAN.

Smart Loopback

Allows transmitting back the received Ethernet stream of data while interchanging the source and destination MAC addresses, IP addresses, and/or UDP/TCP ports. However in **Transparent (Pseudo-Physical)** mode the Smart Loopback operates as a physical loopback by transmitting all received frames unaltered and without discrimination.

The Smart Loopback test can be created locally (refer to *Ethernet Test Applications* on page 81) or remotely using an EXFO unit (refer to *Discover Remote Button* on page 572) or a Third-Party device (see *Third-Party Remote Loopback* on page 62).

- Typical Smart Loopback test application:

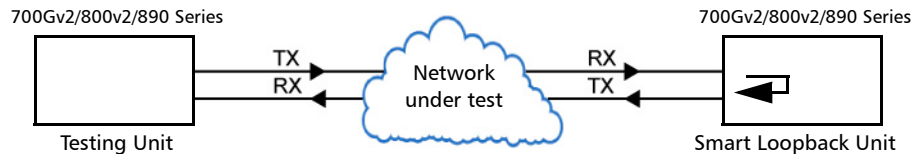

- Supported Interfaces/Rates: 10M to 100G.

Third-Party Remote Loopback

The Third-party Remote Loopback feature provides the capability to be discovered and react to loop-up and loop-down commands from a third party device. This feature is used for unidirectional testing, where the test stream is transmitted from the third party device to a remote EXFO device. The looped back test stream is received and analyzed by the third-party device.

The third-party loopback supports three level of messages:

- Layer 2: Only MAC addresses are swapped.
- Layer 3: MAC and IP addresses are swapped.
- Layer 4: MAC and IP addresses are swapped along with the UDP port.

To emulate a third-party remote device, the loopback mode is set in the function of the layer of loop messages received. The loop messages are:


- Layer 2: Ethernet
- Layer 3: IP
- Layer 4: UDP/TCP

On receipt of the third-party loop-up command as per requested layer, the loopback mode is set and initiated on the module.

Through Mode

The Through Mode test application allows traffic to pass through the 700Gv2/800v2/890 Series unit using two electrical or optical ports for in-service troubleshooting of live traffic between the carrier/service provider network and the customer's network.

- Typical Through Mode test application:

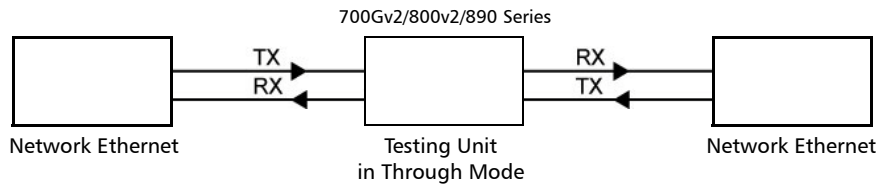

- Supported Interfaces/Rates: 10M to 10GE LAN, and 100GE; 10/100/1000M electrical is supported when using an active copper SFP and the RJ45 port.

TCP Throughput

The objective of this test is to find the TCP throughput based on the successfully transported bytes over the test time. Two units running a TCP Throughput test are required. One unit will act as the source (Local) and the other one as the destination (Remote).

The local unit starts sending TCP segments using the Initial Window Size defined. The window size is adjusted following the TCP algorithm. The window size is incremented until the Maximum Window Size or congestion is reached. However, the window size will be reduced when congestion occurs, then incremented again as described above when the congestion is cleared. TCP Throughput and windows size statistics will be gathered throughout the test.

- Typical TCP Throughput test application:



- Supported Interfaces/Rates: 10M to 1G.


Carrier Ethernet OAM

The Carrier Ethernet OAM test application supports the following tests: **Ethernet OAM (S-OAM)**, **MPLS-TP OAM**, and **Link OAM**.

Ethernet OAM and MPLS TP OAM

The Ethernet Service OAM tests are divided into two main categories:

- Performance Monitoring measures parameters such as frame delay, frame loss, and synthetic loss (Y.1731/MEF).
- Connectivity Fault Management provides the capability for detecting, verifying, and isolating connectivity failure (Y.1731/802.1ag/MEF).
- Typical Ethernet OAM and MPLS TP OAM test applications:

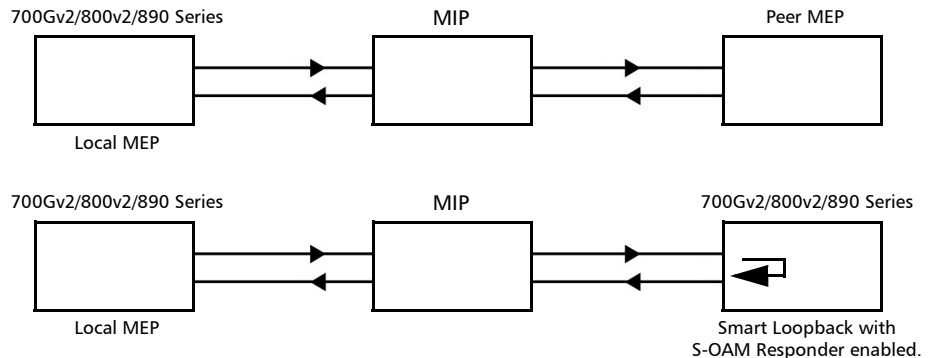

- Supported Interfaces/Rates: 10M to 10G LAN/WAN.


Test Setup - Test Applications

Carrier Ethernet OAM

Link OAM

The Link OAM test validates the Link OAM protocol capabilities and the Ethernet link connection of a remote equipment.

- Typical Link OAM test application:

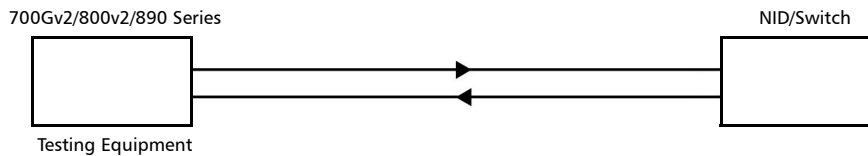

- Supported Interfaces/Rates: 10M to 10G LAN/WAN.

Cable Test

The cable test application is used to diagnose un-shielded twisted pairs (UTP) cables (up to Category 6e/Class E). The optional PoE test verifies that the Power Sourcing Equipment (PSE) is capable to deliver appropriate power to the Powered Device (PD).

Cable test can be performed everywhere in the network where an electrical 10/100/1000 Mbit/s Ethernet interface is available for testing. Only the pairs used by the Ethernet signal will be tested. For 10 Base-T, and 100 Base-TX, pair 2 and 3 will be tested; for 1000 Base-T, all pairs will be tested. However, if the Ethernet signal is unknown, all four pairs will be tested.

Even if a link up is not required when testing with a far end equipment, it is preferable to have the far end equipment powered up to maximize the cable test results.

Supported Ethernet cable categories are: Category 3/Class C, Category 4, Category 5, Category 5e/Class D, and Category 6e/Class E.

The PoE test has to be executed in conjunction with a Power Sourcing Equipment (PSE) as the far end equipment. The 700Gv2/800v2/890 Series module simulates a Powered Device (PD) of Type 1 or Type 2 depending on the selected power class.


Note: *Cable test result is reliable for cable length of 10 meters to 120 meters (32.81 feet to 393.7 feet).*

Test Setup - Test Applications


Cable Test

➤ Typical Cable Test applications:

700Gv2/800v2/890 Series

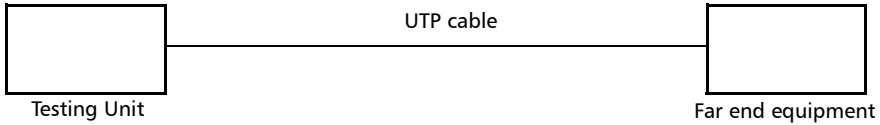

700Gv2/800v2/890 Series

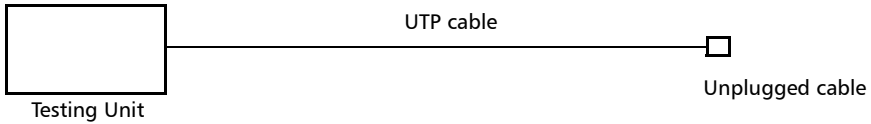


➤ Supported Interfaces/Rates: 10M to 1000M Electrical.

1588 PTP

The 1588 PTP (Precision Time Protocol) test application handles the 1588 PTP communication with the Grand Master (GM) clock, collects statistics related to packets, and monitors the clock Quality Level.

- Typical 1588 PTP test application:

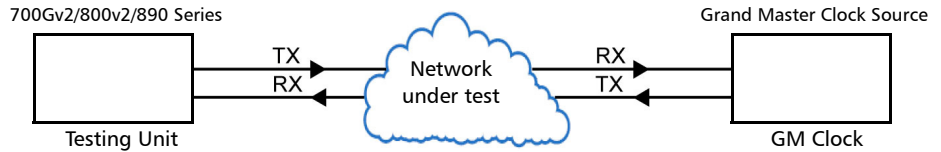


- Supported Interfaces/Rates: 10M to 10G LAN.

SyncE

The Synchronous Ethernet (SyncE) test application provides elementary test primitives to interactively validate the clock management functions of a SyncE capable network equipment.

- Typical SyncE test applications:

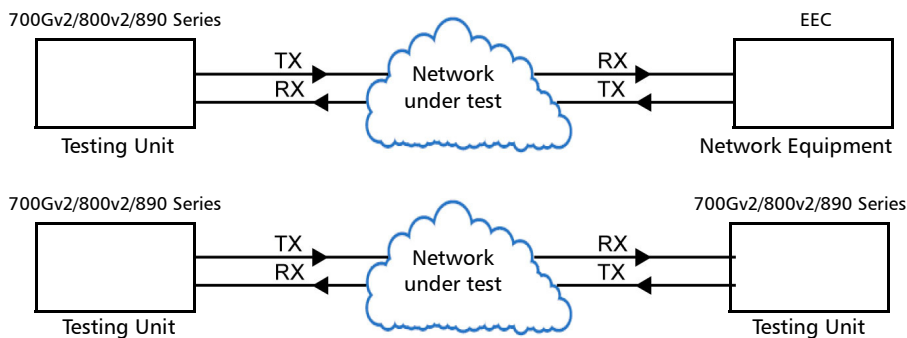


- Supported Interfaces/Rates: 100M to 10G LAN.

FC BERT

The FC BERT (Fibre Channel BERT) application provides full wire-speed traffic generation at the FC-2 layer allowing BER testing for link integrity measurements, latency, buffer-to-buffer credit measurements for optimization as well as login capabilities.

- Typical Fibre Channel BERT test applications:

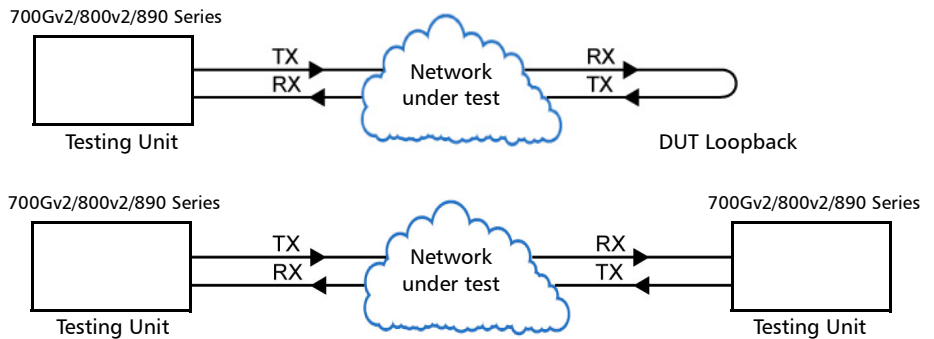

- Supported Interfaces/Rates: 1X, 2X, 4X, 8X, 10X, 16X.




CPRI/OBSAI BERT

The CPRI/OBSAI BERT test application offers the capability to test the fronthaul and dark fiber for CPRI/OBSAI and in addition supports detailed CPRI L2 protocol testing, round trip delay, and Service Disruption Time measurements.


The Common Public Radio Interface (CPRI) is an industry cooperation aimed at defining a publicly available specification for the key internal interface of radio base stations between the Radio Equipment Control (REC) and the Radio Equipment (RE). In the industry the CPRI REC and RE are mainly known as Base Station (BTS) and Remote Radio Head (RRH) respectively.

The Open Base Station Architecture Initiative (OBSAI) is a standard that defines the internal modular structure and interface for base stations.

➤ Typical CPRI/OBSAI BERT test applications:

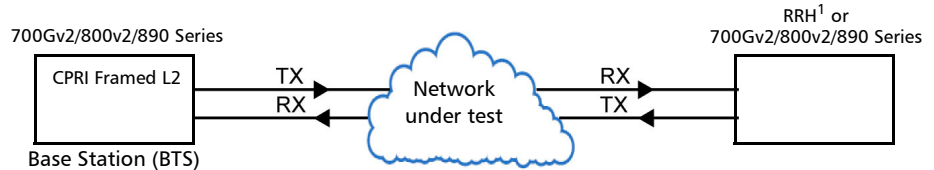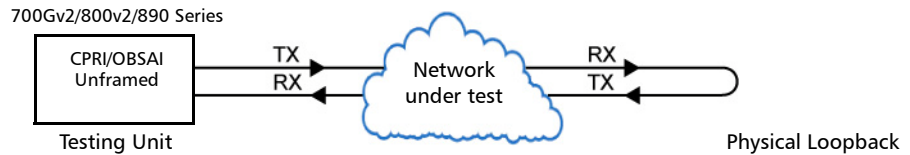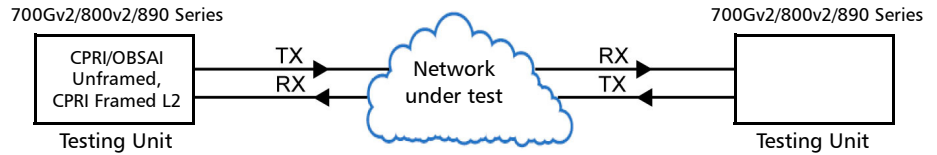

¹ Note that a RRH is typically not capable to perform a loopback of the traffic so BERT test monitoring is not applicable. The BERT test is more common when testing between two test units.

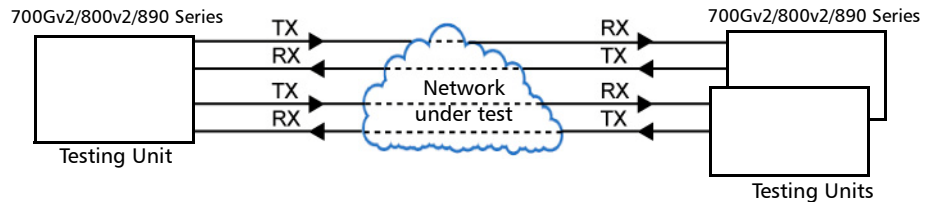

➤ Supported Interfaces/Rates:

CPRI: 1.2, 2.4, 3.1, 4.9, 6.1, and 9.8 Gbit/s

OBSAI: 3.1 Gbit/s.

7 Selecting and Starting a Test


A test can be created either by selecting the test from the Test Applications tab or by loading a previously saved configuration (refer to *Save/Load Button* on page 594 for more information).


Intelligent Apps

iOptics

To select, configure, and start iOptics:

1. From the test menu, tap **Setup**.
2. From the **Test Applications** tab, under **Intelligent Apps**, tap the **iOptics** icon.
3. From the **Test Configurator** tab select the interface/port and its rate.

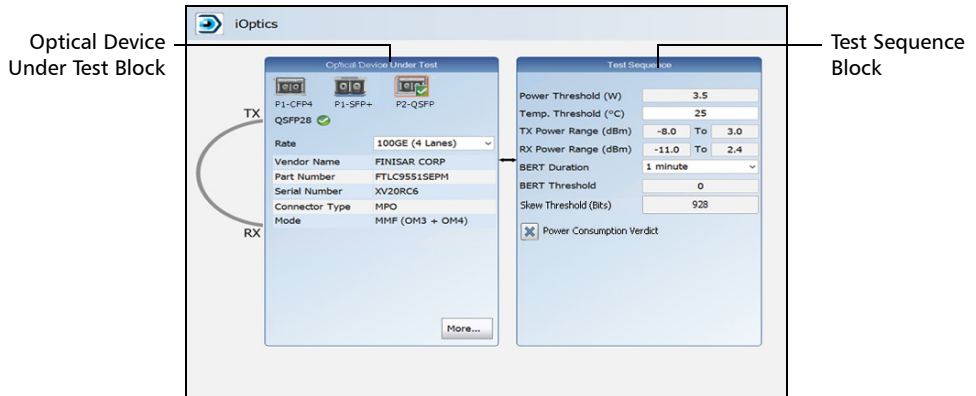

- 3a.** From the **Optical Device Under Test** block, tap the desired port icon.
- 3b.** Once the transceiver is correctly detected , select its rate.
- 3c.** From the **Test Sequence** block, select the test parameters and thresholds (refer to *Test Sequence (iOptics)* on page 296).

Note: The iOptics test application uses **Internal** timing for clock synchronization.

Selecting and Starting a Test


Intelligent Apps

4. Ensure the laser is ON and tap the **Start** button from the right navigation bar to start the test (refer to *Start/Stop | TX Button* on page 598). The **Summary** result page will be automatically displayed when the test is started. For additional results refer to *Test Results* on page 305. The test automatically stops when the transceiver is invalid or missing.
5. When the test ends automatically or is manually stopped, the generate report pop-up is displayed by default. If required, tap **Yes** to generate a report of the test results and statistics (refer to *Report Button* on page 588 for more information).


iSAM

To select, configure, and start iSAM:

1. From the test menu, tap **Setup**.
2. From the **Test Applications** tab, under **Intelligent Apps**, tap the **iSAM** icon.
3. From the **Test Configurator** tab configure the interface structure and its parameters.

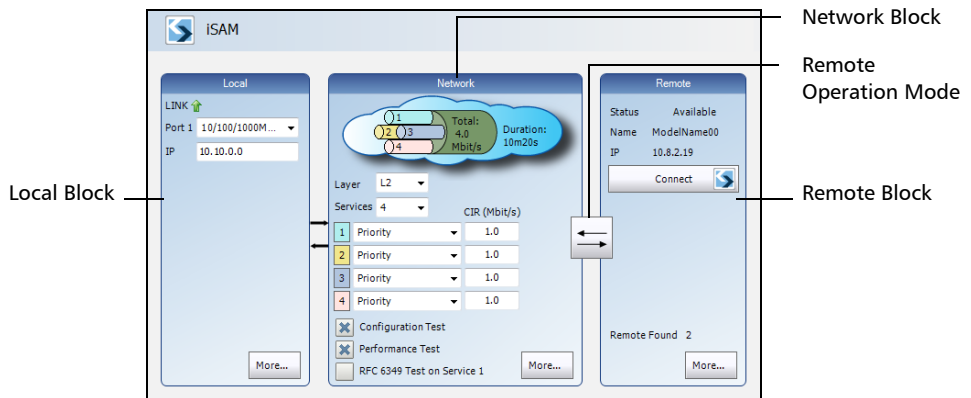




- 3a. From the **Local** block, either select the basic port parameters or click on **More** for all settings (refer to *Local Details (iSAM)* on page 179). Ensure that the link is up and the power level for optical interface (when supported) is adequate in the status bar before proceeding to the next step (refer to *Status Bar* on page 24).

For CFP4/QSFP interface rates, check for the optical validation check mark  indicating that the CFP4/QSFP matches the configured interface/rate (refer to *Physical Interface Port - Test Configurator Overview* on page 94).

Selecting and Starting a Test

- 3b. From the **Network** block, either select the basic test parameters or click on **More** for all settings (refer to *Network Details (iSAM)* on page 204). The total bandwidth and the estimated test duration are displayed.
- 3c. Select the remote operation mode; DTS is automatically selected when the **RFC 6349 Test** is enabled:

	DTS (Dual Test Set) The remote device is automatically set in EtherSAM when the connection/overtake is successfully established.
	Remote Loopback The remote device is automatically set in Smart Loopback when the connection/overtake is successfully established.
	Manual Loopback The remote device is a physical loopback or has to be manually set in loopback.

- 3d. From the **Remote** block, either select the basic remote parameters or click on **More** for all settings (refer to *Remote Details (iSAM)* on page 217).


Note: The *iSAM* test application uses **Internal** timing for clock synchronization.


- 4. Tap the **Start** button from the right navigation bar to start the test (refer to *Start/Stop | TX Button* on page 598). If the connection with the remote module is not established with either **DTS** or **Remote Loopback** mode, the automatic remote connection process is performed before starting the test. The **Summary** result page will be automatically displayed when the test is started from any **Setup** configuration page. For additional results refer to *Test Results* on page 305.
- 5. When the test ends automatically or is manually stopped, the generate report pop-up is displayed by default. If required, tap **Yes** to generate a report of the test results and statistics (refer to *Report Button* on page 588 for more information).

Transport Test Applications

To select, configure, and start a Transport test:

1. From the test menu, tap **Setup**.
2. From the **Test Applications** tab, under **Transport**, tap a test icon.
3. From the **Test Configurator** tab configure the signal structure and its parameters.

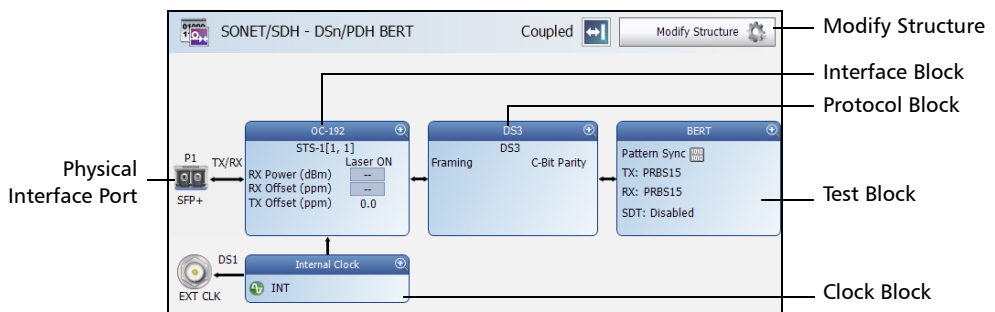

- 3a. Tap the **Modify Structure** button to set the basic structure of the test such as the interface/rate, connector, etc. (refer to *Modify Structure Button* on page 100).
- 3b. For CFP4/QSFP interface, check for the optical validation check mark  indicating that the CFP4/QSFP matches the configured interface/rate (refer to *Physical Interface Port - Test Configurator Overview* on page 94).
- 3c. Tap the interface block to configure the signal parameters (refer to page 89).
- 3d. For an embedded signal, tap the protocol block to configure the signal (refer to page 89).

Selecting and Starting a Test


Transport Test Applications

- 3e.** Tap the test block to configure the specific test settings (refer to page 89). Not available with **NI/CSU Emulation** test application.
- 3f.** Tap the clock block to configure the clock synchronization (refer to *Clock* on page 132).
- 4.** Tap the **Timer** tab to automatically start and/or stop the test at a given time or for a specific duration (refer to *Timer* on page 297).
- 5.** For additional test configurations refer to *Test Functions* on page 487.
- 6.** Tap the **Start** button from the right navigation bar to start the test. (refer to *Start/Stop | TX Button* on page 598). The **Summary** result page will be automatically displayed when the test is started from any **Setup** configuration page. For additional results, refer to *Test Results* on page 305.
- 7.** Tap the **Stop** button to stop the test. By default the generate report pop-up is displayed. If required, tap **Yes** to generate a report of the test results and statistics (refer to *Report Button* on page 588).

Ethernet Test Applications

To select, configure, and start an Ethernet test:

1. From the test menu, tap **Setup**.
2. From the **Test Applications** tab, under **Ethernet**, tap a test icon.
3. From the **Test Configurator** tab configure the interface structure and its parameters.

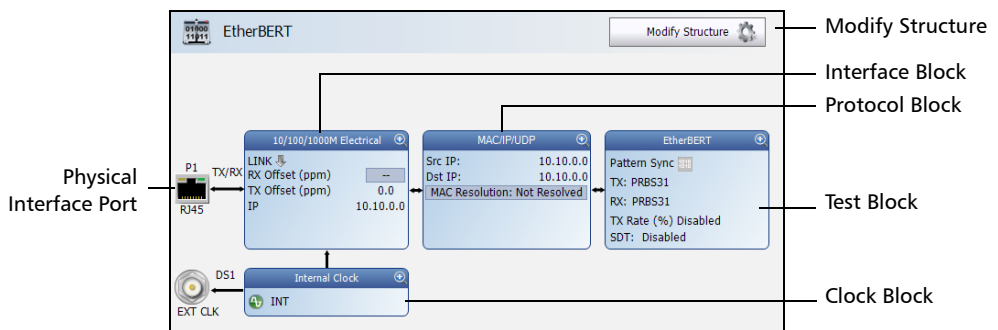

- 3a. Tap the **Modify Structure** button to set the basic structure of the test such as the interface/rate, connector, etc. (refer to *Modify Structure Button* on page 100).
- 3b. For CFP4/QSFP interface, check for the optical validation check mark ☒ indicating that the CFP4/QSFP matches the configured interface/rate (refer to *Physical Interface Port - Test Configurator Overview* on page 94).
- 3c. Tap the interface block to configure the interface parameters (refer to page 89). For **Dual Port** topology, there is an interface block for each port. Ensure that the link is up and the power level (when supported) is present in the status bar before proceeding to the next step (refer to *Status Bar* on page 24).

Selecting and Starting a Test

Ethernet Test Applications

- 3d.** Tap the protocol block¹ to configure the frame structure and its parameters (refer to page 91). For RFC 2544, EtherBERT, and Traffic Gen & Mon in Dual Port topology, there is a protocol block for each port.
- 3e.** Tap the test block² to configure the specific test settings (refer to page 91).
- 3f.** Tap the clock block³ to configure the clock synchronization (refer to *Clock* on page 132).
- 4.** Tap the **Timer** tab to automatically start and/or stop the test at a given time or for a specific duration (refer to *Timer* on page 297).
- 5.** For additional test configurations refer to *Test Functions* on page 487.
- 6.** Tap the **Start** button from the right navigation bar to start the test (refer to *Start/Stop | TX Button* on page 598). The **Summary** result page will be automatically displayed when the test is started from any **Setup** configuration page. For additional results refer to *Test Results* on page 305.
- 7.** Depending on the test, when the test ends automatically or is manually stopped, the generate report pop-up is displayed by default. If required, tap **Yes** to generate a report of the test results and statistics (refer to *Report Button* on page 588 for more information).

1. Not available with Smart Loopback, Through Mode, TCP Throughput, Carrier Ethernet OAM, and Cable Test.


2. Not available with Traffic Gen & Mon and Through Mode

3. Not available in **Dual Port** topology and when using an active copper SFP. However the clock is either set to **Internal** or **Auto** (1GE electrical).

Packet Sync Test Applications

To select, configure, and start a Packet Sync test:

1. From the test menu, tap **Setup**.
2. From the **Test Applications** tab, under **Packet Sync**, tap a test icon.
3. From the **Test Configurator** tab configure the interface structure and its parameters.

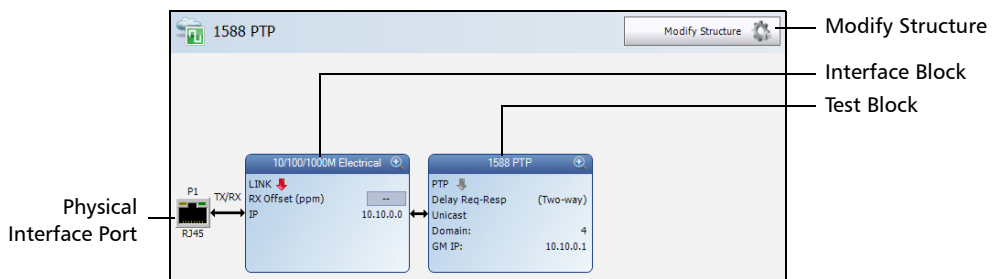

- 3a. Tap the **Modify Structure** button to set the basic structure of the test such as the interface/rate, connector, etc. (refer to *Modify Structure Button* on page 100).
- 3b. Tap the interface block to configure the interface parameters (refer to page 89). Ensure that the link is up and the power level (when supported) is present in the status bar before proceeding to the next step (refer to *Status Bar* on page 24).
- 3c. Tap the test block to configure the specific test settings (refer to page 92).

Selecting and Starting a Test


Packet Sync Test Applications

4. Tap the **Timer** tab to automatically start and/or stop the test at a given time or for a specific duration (refer to *Timer* on page 297).
5. For additional test configurations refer to *Test Functions* on page 487.
6. Tap the **Start** button from the right navigation bar to start the test (refer to *Start/Stop | TX Button* on page 598). The **Summary** result page will be automatically displayed when the test is started from any **Setup** configuration page. For additional results refer to *Test Results* on page 305.
7. Depending on the test, when the test ends automatically or manually stopped, the generate report pop-up is displayed by default. If required, tap **Yes** to generate a report of the test results and statistics (refer to *Report Button* on page 588 for more information).

Fibre Channel Test Application

To select, configure, and start a Fibre Channel test:

1. From the test menu, tap **Setup**.
2. From the **Test Applications** tab, under **Fibre Channel**, tap the **FC BERT** test icon.
3. From the **Test Configurator** tab configure the interface structure and its parameters.

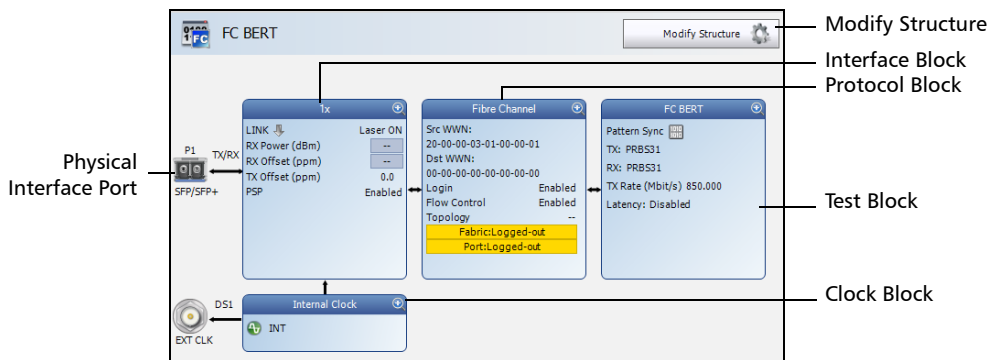

- 3a. Tap the **Modify Structure** button to set the basic structure of the test such as the interface/rate and connector. (refer to *Modify Structure Button* on page 100).
- 3b. Tap the interface block to configure the interface parameters (refer to page 158). Ensure that the link is up and the power level (when supported) is present in the status bar before proceeding to the next step (refer to *Status Bar* on page 24).
- 3c. Tap the protocol block to configure the frame structure and its parameters (refer to page 150).

Selecting and Starting a Test


Fibre Channel Test Application

- 3d.** Tap the test block to configure the specific test settings (refer to page 137).
- 3e.** Tap the clock block to configure the clock synchronization (refer to *Clock* on page 132).
- 4.** Tap the **Timer** tab to automatically start and/or stop the test at a given time or for a specific duration (refer to *Timer* on page 297).
- 5.** Tap the **Start** button from the right navigation bar to start the test (refer to *Start/Stop | TX Button* on page 598). The **Summary** result page will be automatically displayed when the test is started from any **Setup** configuration page. For additional results refer to *Test Results* on page 305.
- 6.** When the test ends automatically or is manually stopped, the generate report pop-up is displayed by default. If required, tap **Yes** to generate a report of the test results and statistics (refer to *Report Button* on page 588 for more information).

Wireless Test Application

To select, configure, and start a Wireless test:

1. From the test menu, tap **Setup**.
2. From the **Test Applications** tab, under **Wireless**, tap the **CPRI/OBSAI BERT** test icon.
3. From the **Test Configurator** tab configure the interface structure and its parameters.

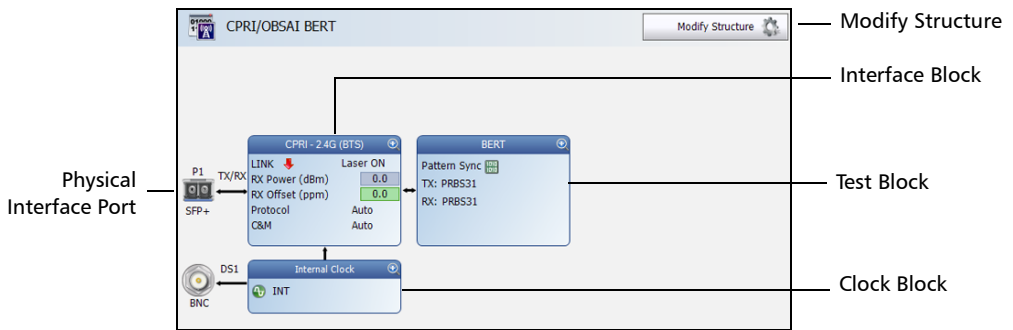

- 3a. Tap the **Modify Structure** button to set the basic structure of the test such as the interface/rate, connector, etc. (refer to *Modify Structure Button* on page 100).
- 3b. Tap the interface block to configure the interface parameters (refer to page 158). For **Dual Port** topology, there is an interface block for each port. Ensure that the power level is present in the status bar before proceeding to the next step (refer to *Status Bar* on page 24).

Selecting and Starting a Test

Wireless Test Application

- 3c.** Tap the test block to configure the specific test settings (refer to page 137). For **Dual Port** topology, there is a test block for each port.
- 3d.** For **Framed L2** in **Base Station** emulation mode, tap the clock block¹ to configure the clock synchronization (refer to *Clock* on page 132). The clock is automatically set to **Recovered** for **Remote Radio Head** emulation mode.

Note: For *Unframed*, the clock is set to **Internal**.

- 4.** Refer to *Test Functions* on page 487 for additional test configurations.
- 5.** Tap the **Timer** tab to automatically start and/or stop the test at a given time or for a specific duration (refer to *Timer* on page 297).
- 6.** Tap the **Start** button from the right navigation bar to start the test (refer to *Start/Stop | TX Button* on page 598). The **Summary** result page will be automatically displayed when the test is started from any **Setup** configuration page. For additional results refer to *Test Results* on page 305.
- 7.** When the test ends automatically or is manually stopped, the generate report pop-up is displayed by default. If required, tap **Yes** to generate a report of the test results and statistics (refer to *Report Button* on page 588 for more information).

1. Not available in **Dual Port** topology. However the clock is automatically set to **Internal** for the **Base Station** and **Recovered** for the **Remote Radio Head**.

8 ***Test Setup - Test Configurator, Timer, and System***

The **Setup** menu offers the following structure:

- **Test Configurator** for **Intelligent Apps** test application.

Test Application	Block	Subtab or Pop Up	Page
iOptics	Optical Device Under Test	Optical Device Under Test Details	214
	Test Sequence	-	296
iSAM	Local	Local Details	179
		CFP4/QSFP/SFP+	131
	Network	Network Details	204
	Remote	Remote Details	217

Test Setup - Test Configurator, Timer, and System

➤ Test Configurator for Transport test applications.

Block	Subtab or Pop Up	Test Application						Page
		a	b	c	d	e	f	
Button	Modify Structure	X	X	X	X	X	X	100
	Signal Auto-Detect	-	-	X	-	X	X	116
Interface	CFP4/QSFP/SFP+	X	X	-	X	-	-	131
	Frequency	X	-	-	-	-	-	153
	FTFL/PT	X	-	-	-	-	-	155
	Labels	-	X	-	X	-	-	176
	Signal	X	X	X	X	X	X	256
	Traces	299	302	-	302	-	-	<---
Protocol	Signal	-	-	-	X	-	-	275
Test	BERT	X	X	X	X	-	-	124
	ISDN PRI - Call Management	-	-	-	-	-	X	169
	ISDN PRI - ISDN Settings	-	-	-	-	-	X	174
Clock	Clock	X	X	X	X	X	X	132

- a. OTN BERT
- b. SONET/SDH BERT
- c. DSn/PDH BERT
- d. SONET/SDH - DSn/PDH BERT
- e. NI/CSU Emulation
- f. ISDN PRI

➤ **Test Configurator** for **Ethernet** test applications.

Block	Subtab or Pop Up	Test Application										Page
		a	b	c	d	e	f	g	h	i	j	
Button	Modify Structure	X	X	X	X	X	X	X	X	X	X	100
Interface	CFP4/QSFP/SFP+	X	X	X	X	X	X	X	X	X	-	131
	Frequency	X	-	X	X	X	X	X	-	-	-	153
	Interface	X	X	X	X	X	X	X	X	X	X	158
	Network	X	X	X	X	X	X	X	X	X	X	198
Protocol	MAC/IP/UDP	X	-	X	X	X	-	-	-	-	-	183
	Services - Global	X	-	-	-	-	-	-	-	-	-	246
	Services - Profile	X	-	-	-	-	-	-	-	-	-	249
	Streams - Global	-	-	-	-	X	-	-	-	-	-	281
	Streams - Profile	-	-	-	-	X	-	-	-	-	-	283
Test	Cable Test	-	-	-	-	-	-	-	-	-	X	129
	EtherBERT and Unframed BERT	-	-	-	X	-	-	-	-	-	-	137
	EtherSAM - Burst	X	-	-	-	-	-	-	-	-	-	142
	EtherSAM - Global	X	-	-	-	-	-	-	-	-	-	144
	EtherSAM - Ramp	X	-	-	-	-	-	-	-	-	-	148
	Link OAM	-	-	-	-	-	-	-	-	X	-	177
	RFC 2544 - Global	-	-	X	-	-	-	-	-	-	-	221
	RFC 2544 - Subtests	-	-	X	-	-	-	-	-	-	-	224
	RFC 6349	-	X	-	-	-	-	-	-	-	-	233
	S-OAM / MPLS-TP OAM	-	-	-	-	-	-	-	-	X	-	236
	Smart Loopback	-	-	-	-	-	X	-	-	-	-	279
	TCP Throughput	-	-	-	-	-	-	-	X	-	-	294
Clock	Clock	X	-	X	X	X	X	-	X	X	-	132

- a. EtherSAM
- b. RFC 6349
- c. RFC 2544
- d. EtherBERT
- e. Traffic Gen & Mon
- f. Smart Loopback
- g. Through Mode
- h. TCP Throughput
- i. Carrier Ethernet OAM
- j. Cable Test

Test Setup - Test Configurator, Timer, and System

➤ Test Configurator for Packet Sync test applications.

Block	Subtab or Pop Up	Test Application		Page
		1588 PTP	SyncE	
Button	Modify Structure	X	X	100
Interface	Interface	X	X	158
	Network	X	X	198
	SFP+	X	X	131
Test	1588 PTP	X	-	117
	SyncE	-	X	291

➤ Test Configurator for Fibre Channel test application.

Block	Subtab or Pop Up	Test Application FC BERT	Page
Button	Modify Structure	X	100
Interface	Interface	X	158
	SFP+	X	131
Protocol	Fibre Channel	X	150
Test	FC BERT	X	137

- **Test Configurator** for **Wireless** test application.

Block	Subtab or Pop Up	Test Application CPRI/OBSAI BERT	Page
Button	Modify Structure	X	100
Interface	Interface	X	158
	SFP+	X	131
Test	BERT and Unframed BERT	X	137

- **Timer**, see page 297.
- **System**, see page 293.


Test Configurator Overview

The **Test Configurator** tab displays the interconnected blocks composing the test structure. Each block of the test structure gives an overview of its configuration/status. Availability of each block depends on the selected test application and its structure. Arrows are used to indicate the interconnection between blocks as well as the direction of the clock and data flow. Tap on a block or the **More** button for **Intelligent Apps**, to change the configuration parameters of this block.

From the **Test** menu, tap **Setup**, and the **Test Configurator** tab.


- Intelligent Apps:

iOptics:

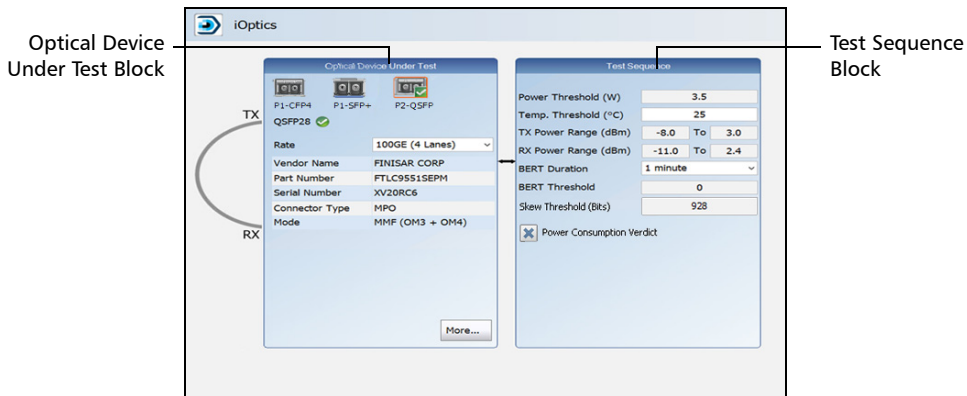

- **Optical Device Under Test** block displays and allows to change basic interface/port settings. Tap on the **More** button to access more information and settings.
- **Test Sequence** block allows to change basic test settings.

iSAM:

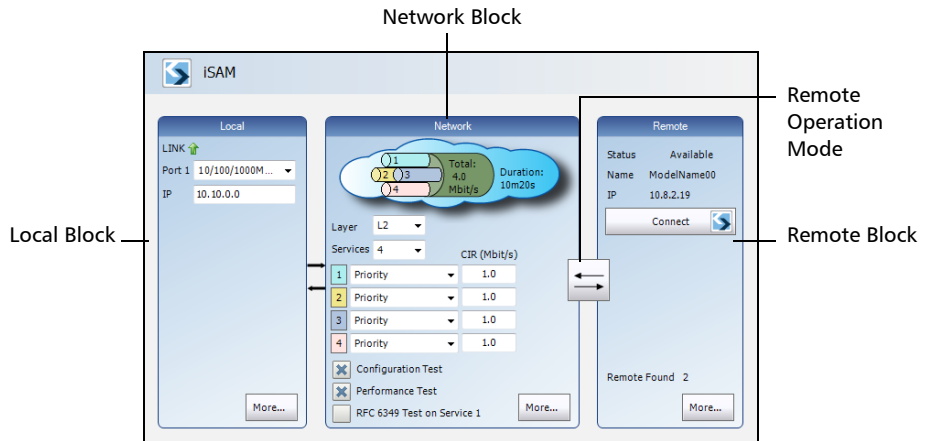


The block arrangement represents the network under test. From any block, either select the basic parameters or click on **More** for all settings.

- **Local** block displays and allows to change basic interface settings. Tap on the **More** button to access all settings.
- **Network** block displays and allows to change basic test settings. Tap on the **More** button to access all settings.
- Remote operation mode allows to select the remote operation mode. Tap on the button to change the remote operation mode.
- **Remote** block displays and allows to change basic remote settings. Tap on the **More** button to access all settings.


Test Setup - Test Configurator, Timer, and System

Test Configurator Overview


➤ Transport Test Applications:

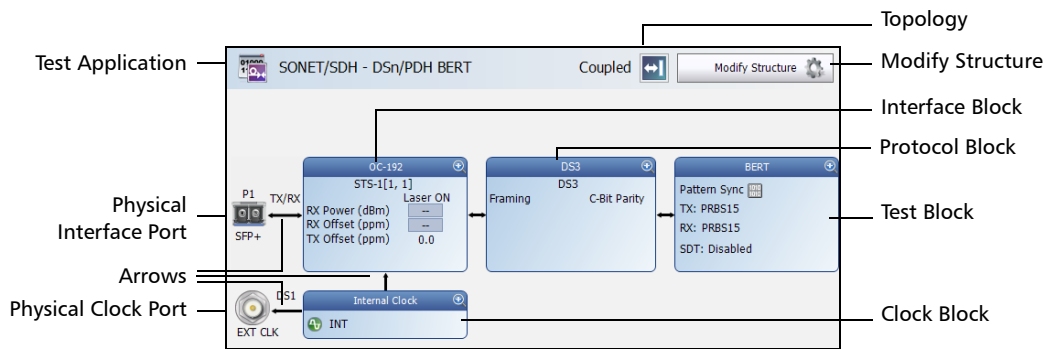


➤ Ethernet Test Applications:

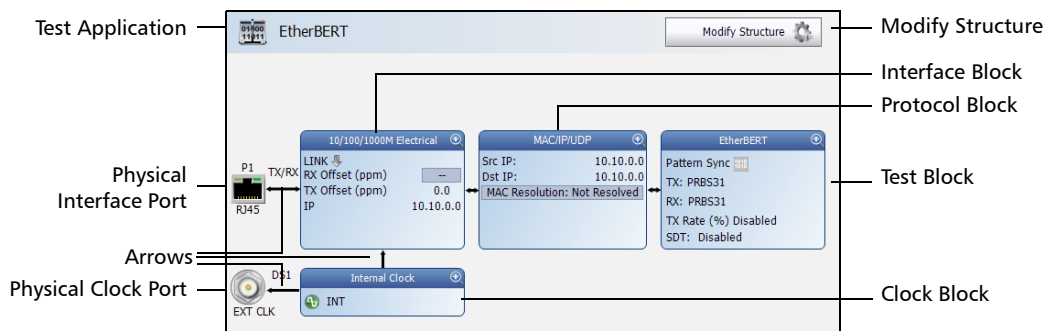


➤ Packet Sync Test Applications:

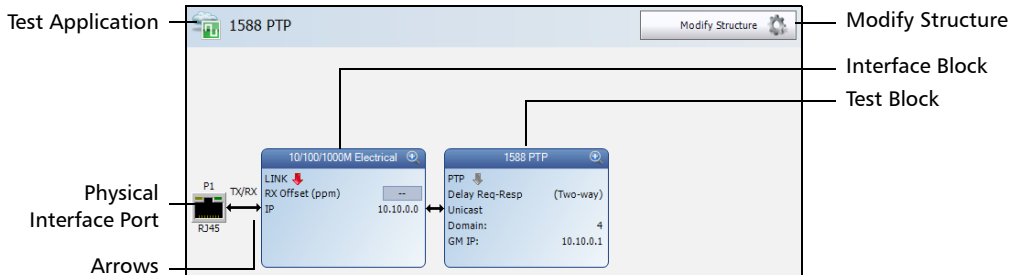

➤ Fibre Channel Test Application:

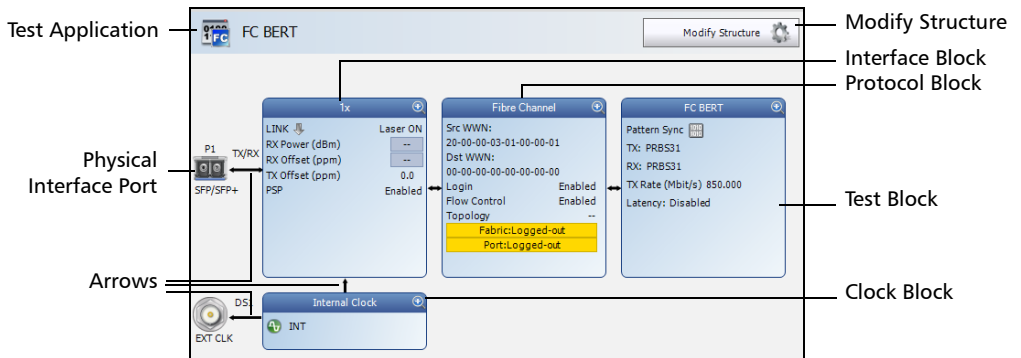

➤ Wireless Test Application:

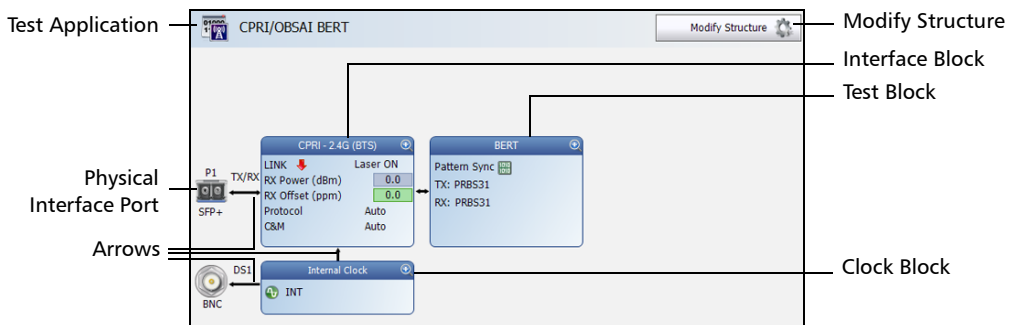





Test Setup - Test Configurator, Timer, and System

Test Configurator Overview

- Test Application indicates the selected test application.
- Topology, for Transport Test Applications, indicates the selected test topology.
- Modify Structure button, allows the configuration of the physical port and the signal interface structure.
- Physical Interface Port indicates the physical interface port. For **Dual Port** topology, there is a physical interface for each port.

The status for a physical CFP4/QSFP interface and the compatibility with the selected signal/interface is indicated as follows. The icon and its description are also displayed just below the test application name when validating or if there is a problem.

	Validating CFP4/QSFP
	Missing CFP4/QSFP
	Invalid CFP4/QSFP or mismatch with the selected signal/interface.
	Valid CFP4/QSFP matching the selected interface/rate.

- Arrows are used to indicate the interconnection between blocks as well as the direction of the clock and data flow.

A line with an arrow on both ends indicates a bidirectional communication (TX/RX).

A line with a single arrow indicates a unidirectional communication, either **TX** when going out of a block or **RX** when going into a block.

A line going out of a block returning back to the same block, indicates a loopback communication.

- Physical Clock Port indicates the direction, TX or RX, of the selected clock. The arrow next to the physical clock image indicates if a clock is generated (TX, arrow pointing to the left) or received (RX, arrow pointing to the right) at/from the physical EXT CLK port.
- Interface Block displays an overview of the interface settings and status. Tap on the interface block to change the settings and to see detailed status. For **Dual Port** topology, there is an interface block for each port.
- Protocol Block displays an overview of either the frame structure and its parameters for Ethernet test applications or the embedded signal for Transport test applications. This block is not present for all tests. Tap on the protocol block to change the settings and to see detailed status. For RFC 2544, EtherBERT, and Traffic Gen & Mon in **Dual Port** topology, there is a protocol block for each port.
- Test Block displays an overview of the test settings and status. Tap on the test block to change the settings and to see detailed status.
- Clock Block displays an overview of the clock settings and status. Tap on the clock area to change the settings and to see detailed status. For **Dual Port** topology, the clock block is not present but the clock is set to **Internal**.

Modify Structure Button

From the **Test** menu, tap **Setup**, **Test Configurator**, and the **Modify Structure** button.

For Transport Test Applications

TX/RX allows the configuration of the following parameters for either TX/RX, RX and RX2, TX, or RX depending on the selected topology.

- **Interface/Rate:** Select the desired interface rate. Choices depend on the selected test and the rates available on the NetBlazer V2 Series.

Test	Interface/Rate
OTN (Parallel)	OTU4 (4 Lanes) [111.81 Gbit/s] OTU3e2 (4 Lanes) [44.583 Gbit/s] OTU3e1 (4 Lanes) [44.571 Gbit/s] OTU3 (4 Lanes) [43.018 Gbit/s]
OTN (Serial)	OTU2 [10.709 Gbit/s] OTU1e [11.049 Gbit/s] OTU2e [11.096 Gbit/s] OTU1f [11.270 Gbit/s] OTU2f [11.318 Gbit/s] OTU1 [2.666 Gbit/s]
SONET	OC-192 [9.953 Gbit/s] OC-48 [2.488 Gbit/s] OC-12 [622.08 Mbit/s] OC-3 [155.520 Mbit/s] OC-1 [51.840 Mbit/s] STS-3e [155.520 Mbit/s] STS-1e [51.840 Mbit/s]
SDH	STM-64 [9.953 Gbit/s] STM-16 [2.488 Gbit/s] STM-4 [622.080 Mbit/s] STM-1 [155.520 Mbit/s] STM-0 [51.840 Mbit/s] STM-1e [155.520 Mbit/s] STM-0e [51.840 Mbit/s]

Test	Interface/Rate
DSn	DS1 [1.544 Mbit/s] DS3 [44.736 Mbit/s]
PDH	E1 [2.048 Mbit/s] E3 [34.368 Mbit/s] E4 [139.264 Mbit/s]
NI/CSU Emulation	DS1
ISDN PRI	DS1 [1.544 Mbit/s] E1 [2.048 Mbit/s]

- **Connector** allows the selection of the NetBlazer V2 Series's port.

Interface/Rate	Connector ^a	
	720Gv2/730Gv2 870v2/870Q 880v2/880Q 890NGE (10G)	890 890NGE (100G)
OTU4 (4 Lanes) [111.81 Gbit/s]	-	Port 1 - CFP4 Port 2 - QSFP
OTU3e2 (4 Lanes) [44.583 Gbit/s] OTU3e1 (4 Lanes) [44.571 Gbit/s] OTU3 (4 Lanes) [43.018 Gbit/s]	-	Port 2 - QSFP
OTU2 [10.709 Gbit/s] OTU1e [11.049 Gbit/s] OTU2e [11.096 Gbit/s] OTU1f [11.270 Gbit/s] OTU2f [11.318 Gbit/s] OTU1 [2.666 Gbit/s] OC-192 [9.953 Gbit/s] STM-64 [9.953 Gbit/s] OC-48 [2.488 Gbit/s] OC-12 [622.08 Mbit/s] OC-3 [155.520 Mbit/s] OC-1 [51.840 Mbit/s] STM-16 [2.488 Gbit/s] STM-4 [622.080 Mbit/s] STM-1 [155.520 Mbit/s] STM-0 [51.840 Mbit/s]	Port 1 - SFP+ ^b	Port 1 - SFP+

Test Setup - Test Configurator, Timer, and System

Modify Structure Button

Interface/Rate	Connector ^a	
	720Gv2/730Gv2 870v2/870Q 880v2/880Q 890NGE (10G)	890 890NGE (100G)
STS-3e [155.520 Mbit/s] STS-1e [51.840 Mbit/s] STM-1e [155.520 Mbit/s] STM-0e [51.840 Mbit/s]	BNC	-
DS1 [1.544 Mbit/s]	Bantam RJ48C	-
E1 [2.048 Mbit/s]	Bantam BNC RJ48C	-
DS3 [44.736 Mbit/s] E3 [34.368 Mbit/s] E4 [139.264 Mbit/s]	BNC	-

- Availability of connectors depend on the model.
- Port 2 is used with OC-192/STM-64 in **Decoupled (TX≠RX)** mode.

- **CFP4:** Use this configuration when a CFP4 transceiver module is inserted in the CFP4 slot of the 890/890NGE module.
- **QSFP:** Use this configuration when a QSFP+ or a QSFP28 transceiver module is inserted in the QSFP slot of the 890/890NGE module.
- **Framing:** For OTN BERT, and SONET/SDH BERT test applications, the framing is set to **Framed**.

- **OTN Multiplexing - Config Mux** button, only available with OTN BERT, indicates the OTN test mapping.

Interface/Rate	OTN Multiplexing
OTU1 [2.666 Gbit/s]	ODU1
OTU2 [10.709 Gbit/s]	ODU2
OTU1e [11.049 Gbit/s]	ODU1e
OTU2e [11.096 Gbit/s]	ODU2e
OTU1f [11.270 Gbit/s]	ODU1f
OTU2f [11.318 Gbit/s]	ODU2f
OTU3 (4 Lanes) [43.018 Gbit/s]	ODU3
OTU3e1 (4 Lanes) [44.571 Gbit/s]	ODU3e1
OTU3e2 (4 Lanes) [44.583 Gbit/s]	ODU3e2
OTU4 (4 Lanes) [111.81 Gbit/s]	ODU4

Test Setup - Test Configurator, Timer, and System

Modify Structure Button

- **SONET/SDH Multiplexing - Config Mux** button allows the selection of SONET/SDH multiplexing. Only available with SONET/SDH BERT test application.

Embedded SONET/SDH	SONET/SDH Multiplexing
OC-192	STS-192c, STS-48c, STS-12c, STS-3c, STS-1, STS-1/VT2, STS-1/VT1.5
STM-64	AU-4-64c, AU-4-16c, AU-4-4c, AU-4, AU-4/TU-3, AU-4/TU-12, AU-4/TU-11, AU-3, AU-3/TU-12, AU-3/TU-11
OC-48	STS-48c, STS-12c, STS-3c, STS-1, STS-1/VT2, STS-1/VT1.5
STM-16	AU-4-16c, AU-4-4c, AU-4, AU-4/TU-3, AU-4/TU-12, AU-4/TU-11, AU-3, AU-3/TU-12, AU-3/TU-11
OC-12	STS-12c, STS-3c, STS-1, STS-1/VT2, STS-1/VT1.5
STM-4	AU-4-4c, AU-4, AU-4/TU-3, AU-4/TU-12, AU-4/TU-11, AU-3, AU-3/TU-12, AU-3/TU-11
OC-3	STS-3c, STS-1, STS-1/VT2, STS-1/VT1.5
STM-1	AU-4, AU-4/TU-3, AU-4/TU-12, AU-4/TU-11, AU-3, AU-3/TU-12, AU-3/TU-11
OC-1	STS-1, STS-1/VT2, STS-1/VT1.5
STS-3e	STS-3c, STS-1, STS-1/VT2, STS-1/VT1.5
STS-1e	STS-1, STS-1/VT2, STS-1/VT1.5
STM-0	AU-3, AU-3/TU-12, AU-3/TU-11
STM-1e	AU-4, AU-4/TU-3, AU-4/TU-12, AU-4/TU-11, AU-3, AU-3/TU-12, AU-3/TU-11
STM-0e	AU-3, AU-3/TU-12, AU-3/TU-11

- **DSn/PDH Multiplexing**, available with **SONET/SDH - DSn/PDH BERT** and **DSn/PDH** test application applications, allows the selection of the DSn/PDH multiplexing.

Interface/Rate	DSn/PDH Multiplexing
DS3	None (default), DS1, E1
DS1	None
E4	None (default), E3, E3/E2/E1
E3	None (default), E2/E1
E1	None


- **Client** is set to **Pattern**.
- **Switch Type**¹ allows the selection of the **Switch Type** for ISDN DS1 and E1 rates. The switch type in brackets indicates the switch type in abbreviated format.
 - **DS1: National ISDN (NI-4)** - (default), **National ISDN (NI-3)**, **National ISDN (NI-2)**, **National ISDN (NI-1)**, **AT&T 4ESS**, **AT&T 5ESS**, and **Nortel DMS-100/250**.
 - **E1: Euro ISDN** (default), **Euro Q.SIG**, and **Euro VN6**.
- **Emulation Mode**¹: **TE** (Terminal Equipment) - (default), and **NT** (Network Termination).

1. Only available with ISDN PRI test application.


Test Setup - Test Configurator, Timer, and System

Modify Structure Button


- **Topology** allows the selection of the network test topology.
- **Coupled (TX=RX)** uses the same settings for both the TX and RX signals.




- **Decoupled (TX≠RX)** uses independent settings for TX and RX signals. However, the pattern and some other parameters are always coupled. **Decoupled** is not supported with **OTN BERT** test application.



- **Through** loops the RX signal to the TX port without TX overwrite capabilities.

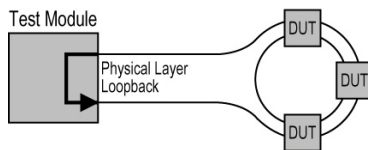

- **Dual RX** uses two DS1 or DS3 signals at the same time. Both RX ports are coupled at the exception of the termination mode. Only available with DS1 and DS3 signal rates.

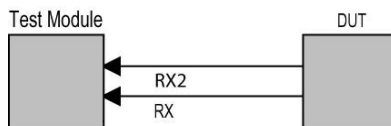

For Ethernet Test Applications

- **Port 1** and **Port 2** are only displayed when **Dual Port** topology is selected and allows to configure each port individually.
- **Interface/Rate** choices depend on the selected test and the rates available on the NetBlazer V2 Series. Only rates up to 10G WAN are supported with **Dual Port** topology.

Test	Interface/Rate
EtherSAM	100GE (4 Lanes) [103.125 Gbit/s]
RFC 2544	40GE (4 Lanes) [41.25 Gbit/s]
RFC 6349	10GE WAN ^a
EtherBERT	10GE LAN
Traffic Gen & Mon	1GE Optical
Smart Loopback	100M Optical
	10/100/1000M Electrical ^b
Carrier Ethernet OAM	10GE WAN
	10GE LAN
	1GE Optical
	100M Optical
	10/100/1000M Electrical
Through Mode	100GE (4 Lanes) [103.125 Gbit/s]
	10GE LAN
	1GE Optical
	100M Optical
	10/100/1000M Electrical ^c
TCP Throughput	1GE Optical
	100M Optical
	10/100/1000M Electrical
Cable Test	10/100/1000M Electrical

- a. Not available with RFC 6349 test application.
- b. Also available as a second port when the test application requires two ports; Ethernet 10/100/1000 Mbit/s electrical is supported when using an active copper SFP.
- c. Ethernet 10/100/1000 Mbit/s electrical is supported when using an active copper SFP and the RJ45 port.

Test Setup - Test Configurator, Timer, and System

Modify Structure Button

- **SR4** check box when selected (cleared by default) defines the PHY type as SR4 and allows to enable RS-FEC (see page 158) when using a 100GBASE-SR4 transceiver. Ensure both ends of the circuit have the FEC enabled. Only available with Ethernet framed test applications on 890/890NGE.
- **Primary Port / Secondary Port**, available with Through Mode test application, allows to select the NetBlazer V2 Series's ports that are respectively used as primary (Port 1) and secondary (Port 2) port. The configuration of the network configuration parameters will be available on the Primary Port only.
- **Connector** allows the selection of the NetBlazer V2 Series's port.

Interface/Rate	Connector ^a	
	720Gv2/730Gv2 870v2/870Q 880v2/880Q 890NGE (10G)	890 890NGE (100G)
100GE (4 Lanes) [103.125 Gbit/s]	-	Port 1- CFP4 Port 2 - QSFP
40GE (4 Lanes) [41.25 Gbit/s]	-	Port 2 - QSFP
10GE WAN 10GE LAN 1GE Optical 100M Optical	Port 1 - SFP+ Port 2 - SFP+	Port 1 - SFP+
10/100/1000M Electrical	Port 1 - RJ45 Port 2 - SFP+ (RJ45) ^{b, c}	Port 1 - SFP+ (RJ45) ^c

- a. Availability of connectors depend on the model.
- b. Only available as a second port when the test application requires two ports.
- c. Ethernet 10/100/1000 Mbit/s electrical is supported when using an active copper SFP.

- **CFP4:** Use this configuration when a CFP4 transceiver module is inserted in the CFP4 slot of the 890/890NGE module.
- **QSFP:** Use this configuration when a QSFP+ or a QSFP28 transceiver module is inserted in the QSFP slot of the 890/890NGE module.
- **Framing**, available for EtherBERT test application, allows the selection of the test framing type; otherwise the framing is set to Framed Layer 2. See *Network* on page 198 for more information on frame format.
- **Framed Layer 1:** Frame of x bytes that allows connection to any interface that complies with 802.3 Ethernet PHY or DWDM fibre. Available with rate up to 10G WAN.

IFG (Min. 12 bytes)	Preamble (7 bytes)	SFD (1 byte)	Test Pattern (Length: 48 to 10/16 Kbytes)
------------------------	-----------------------	-----------------	--

- **Framed Layer 2:** Frames of x¹ bytes without network layer (**None**) that complies with IEEE 802a Ethernet II standard.

SOF	Destination Address	Source Address	Type	Test Pattern (Configurable length)	FCS	IFG
-----	---------------------	----------------	------	---------------------------------------	-----	-----

- **Framed Layer 3/4 (default):** Frames of x¹ bytes with UDP (default) or TCP network layer that complies with IEEE 802a Ethernet II standard.

SOF	Destination Address	Source Address	Type	IP Header	UDP Header	BERT Tag	Test Pattern (Configurable length)	FCS	IFG	
SOF	Destination Address	Source Address	Type	IP Header	TCP Header	BERT Tag	Test Pattern (Configurable length)	TCP Checksum Cancellor	FCS	IFG

1. To set the frame length, see Frame Size on page 141 for EtherBERT, and page 223 for RFC 2544.

Test Setup - Test Configurator, Timer, and System

Modify Structure Button

- **Unframed (Interop)** is only available with optical interface up to 10G LAN:

For **Seed A** and **Seed B**, only available for 10G LAN, the pattern is generated by the PCS scrambler from a specific seed. The pattern is not encoded.

For **PRBS31 Unscrambled**, only available for 10G LAN, the pattern is generated at the PCS layer. The pattern is not encoded and not scrambled.

For **PRBS** and **User Pattern**: Pattern generated by the PCS scrambler. The pattern is encoded.

IFG (Min. 12 bytes)	Preamble (7 bytes)	SFD (1 byte)	Test Pattern (Length: infinite)
------------------------	-----------------------	-----------------	------------------------------------

- **Unframed** is only available with optical interface up to 10G LAN:
Encoded pattern generated by the PCS scrambler.

IFG (Min. 12 bytes)	Preamble (7 bytes)	SFD (1 byte)	Test Pattern (Length: infinite)
------------------------	-----------------------	-----------------	------------------------------------

- **Unframed with Sync** is only available with optical interface up to 10G LAN: Pattern of a length corresponding to the number of bytes transmitted in 1 second.

IFG (Min. 12 bytes)	Preamble (7 bytes)	SFD (1 byte)	Test Pattern (Length: about 1 second)
------------------------	-----------------------	-----------------	--

➤ Loopback Mode

Note: Only available for Smart Loopback Ethernet test application.

Transparent (Pseudo-Physical) check box when selected (cleared by default), determines that the Smart Loopback operates as a physical loopback by transmitting all received frames unaltered and without discrimination. When the check box is cleared, the Loopback mode is selectable from *Loopback* on page 279.

In transparent mode, the **Network** tab and the **Ping & Trace Route** functions are not available.

Note: The **Transparent** mode is intended to be used for point-to-point topology, not for switched or routed networks. Use the **Transparent** mode with caution because all received frames are looped back without discrimination.

- **Topology** allows the selection of the network test topology: **Single Port** (default) or **Dual Port**. **Dual Port** is only available with EtherSAM, RFC 2544, Ether/BERT, and Traffic Gen & Mon for rates up to 10G WAN; not available on 890 and 890NGE (100G).

➤ OAM Type

Note: Only available for Carrier Ethernet OAM test application.

Selects the type of Carrier OAM network: **Ethernet OAM** (S-OAM; default), **MPLS-TP OAM**, or **Link OAM**.

- **S-OAM** check box when selected, enables S-OAM on all services. Available for rates up to 10G WAN.

For Packet Sync Test Applications

- **Interface/Rate:** Select the desired interface rate. Choices depend on the selected test and the rates available on the NetBlazer V2 Series.

Test	Interface/Rate
1588 PTP SyncE	10GE LAN 1GE Optical 100M Optical 10/100/1000M Electrical ^a

- a. The 10M rate is not available for SyncE test application.

- **Connector:** Allows the selection of the NetBlazer V2 Series’s port available for the selected interface/rate.

Interface/Rate	Connector ^a	
	720Gv2/730Gv2 870v2/870Q 880v2/880Q 890NGE (10G)	890 890NGE (100G)
10GE LAN 1GE Optical 100M Optical	Port 1 - SFP+ Port 2 - SFP+	Port 1 - SFP+
10/100/1000M Electrical	Port 1 - RJ45	Port 1 - SFP+ (RJ45) ^b

- a. Availability of connectors depend on the model.
- b. Ethernet 10/100/1000 Mbit/s electrical is supported when using an active copper SFP.

For Fibre Channel Test Application

- **Interface/Rate** choices depend on the rates available on the NetBlazer V2 Series.

Interface/Rate	Model
1X	720Gv2/730Gv2
2X	870v2/870Q
4X	880v2/880Q
8X	890/890NGE
10X	
16X	890/890NGE

- **Connector:** Allows the selection of the NetBlazer V2 Series's port available for the selected interface/rate.

Interface/Rate	Connector ^a	
	720Gv2/730Gv2 870v2/870Q 880v2/880Q 890NGE (10G)	890 890NGE (100G)
1X	Port 1 - SFP+	Port 1 - SFP+
2X	Port 2 - SFP+	
4X		
8X		
10X		
16X	-	

- a. Availability of connectors depend on the model.

For Wireless Test Application

- **Port 1** and **Port 2** are only displayed when **Dual Port** topology is selected and allows to configure each port individually.
- **Interface/Rate** allows the selection of the interface rate.

Interface Rate	Connector ^a	
	720Gv2/730Gv2 870v2/870Q 880v2/880Q 890NGE (10G)	890 890NGE (100G)
CPRI - 1.2G CPRI - 2.4G CPRI - 3.1G OBSAI - 3.1G CPRI - 4.9G CPRI - 6.1G CPRI - 9.8G	Port 1 - SFP+ Port 2 - SFP+	Port 1 - SFP+

a. Availability of connectors depend on the model.

- **Connector** is the NetBlazer V2 Series’s port available for the selected interface/rate (see table above).
- **Framing**

Note: *Dual Port topology is only supported for **Framed L2**.*

- **Framed L2** (default) is mainly used to validate connectivity with the base station (REC) or remote radio head (RE) over the fiber interface.
- **Unframed** is mainly used to validate the continuity of the dark fiber at CPRI or OBSAI rate.

- **Emulation Mode**, available with **Framed L2**, determine the CPRI Start-Up Sequence operation and synchronization operation.
 - **Base Station** (default) is used to validate the connectivity with the RRH. It initiates the start-up sequence and provides synchronization to the RRH.
 - **Remote Radio Head** is used to validate the communication with a base station. It begins its start-up sequence when it detects a valid signal from the base station.
- **Topology** allows the selection of the network test topology: **Single Port** (default) or **Dual Port**. Dual Port is only available with CPRI Framed L2; not available on 890 and 890NGE (100G).

Signal Auto-Detect

The Signal Auto-Detect allows the detection of the DS1/DS3 interface **Line Coding** (DS1), **Framing**, and **Test Pattern**.

Signal Auto-Detect is only available:

- with DS1 and DS3 interfaces.
- when the test is stopped.
- when Loopback is not activated for NI/CSU Emulation test.

Note: *Test Pattern is not detected with NI/CSU Emulation and ISDN PRI test applications.*

During the detection process, the following messages may be displayed: **Detecting**, **Successful**, and/or **Failed**.

When the auto-detection is successful, the detected parameters are automatically applied as the test interface configuration.

Upon detection of specific alarms, the detection may not be possible, tap **Retry** to invoke the detection again.

1588 PTP

From the **Test** menu, tap **Setup, Test Configurator**, and the 1588 PTP test block.

PTP

Note: Refer to Status Bar on page 24 for PTP link status.

➤ Profile

- **ITU G.8265.1** (default), also called Telecom Profile, is for frequency synchronization.
- **ITU G.8275.1**, also called Telecom Profile with full timing support from the network, is for very accurate phase/time synchronization required by new mobile applications.
- **Domain** is the PTP domain parameter used by the 1588 PTP function to communicate with the Grand Master clock: **0** to **255**. However, the standard values are: **4** (default) to **23** for G.8265.1 and **24** (default) to **43** for G.8275.1.
- **Framing** is not selectable and is set to **UDP/IPv4** for G.8265.1 and **Ethernet** for G.8275.1.
- **Mode** is not configurable and is set to **Unicast** for G.8265.1 and **Multicast** for G.8275.1.
 - **Unicast** implies a dedicated communication link between the master and the slave clock.
 - **Multicast** implies that a master clock send its Sync/Follow Up and Delay Response in a multicast mode.
- **Multicast MAC**, available with ITU G.8275.1, is the multicast address used to send the delay request: **01-1B-19-00-00-00** (forwardable; default), **01-80-C2-00-00-0E** (non-forwardable), or **User Defined** (default **User Defined** address is **01:1B:19:00:00:01**).

Test Setup - Test Configurator, Timer, and System

1588 PTP

- **GM IP Address**¹ is the IP address of the Grand Master Clock used by the 1588 PTP function to communicate with it.
- **Quick Ping**¹ button allows to test if the Grand Master IP address can be reached. A message is returned indicating if the ping attempt was **Successful** or **Failed**.
- **IP TOS/DS**¹ allows to enter the Type of Service: **0x00** (default) to **0xFF**.
- **Mechanism** is not selectable and is set to **Delay Req-Resp** (Delay Request-Response) which specifies the mechanism used by the 1588 PTP function to communicate with the Grand Master clock. Refer to *Delay Request-Response* on page 635 for more information.
- **Delay Mode** is not selectable and is set to **Two-way** which uses Sync/Follow Up, Delay Request, and Delay Response messages.
- **Connect**¹ button is used to initiate the Grand Master Connection process. This process is also automatically initiated when starting the test if not already initiated. The process automatically ends when stopping the test.
- **Negotiation Status**¹ is displayed during the Unicast negotiation process which is initiated when either the test is started or the **Connect** button is activated. See *Negotiation Status* on page 424 for more information.

1. Only available with Unicast mode.

➤ Message Rate

- **Announce** determines the transmission interval of the Announce messages:

Configurable for G.8265.1: **1 msg/16s**, **1 msg/8s**, **1 msg/4s**, **1 msg/2s** (default), **1 msg/s**, **2 msg/s**, **4 msg/s**, or **8 msg/s**.

For G.8275.1, indicates the announce rate log message interval.

- **Sync** determines the transmission interval of the Sync messages:

Configurable for G.8265.1: **1 msg/16s**, **1 msg/8s**, **1 msg/4s**, **1 msg/2s** (default), **1 msg/s**, **2 msg/s**, **4 msg/s**, or **8 msg/s**. **16 msg/s**, **32 msg/s** (default), **64 msg/s**, or **128 msg/s**

For G.8275.1, indicates the sync rate log message interval.

- **Delay-Request** determines the transmission interval of the Delay Request messages: **1 msg/16s**, **1 msg/8s**, **1 msg/4s**, **1 msg/2s** (default), **1 msg/s**, **2 msg/s**, **4 msg/s**, or **8 msg/s**. **16 msg/s** (default for G.8275.1), **32 msg/s** (default for G.8265.1), **64 msg/s**, or **128 msg/s**. The **Delay-Request** message rate is limited by the Sync rate selection; the Delay-Request message rate is automatically updated to be smaller than or equal to the **Sync** message rate.

➤ Service Duration (only available with Unicast mode)

- **Lease Duration** is not configurable and is set to **300** seconds which determines the Lease Duration used between the 1588 PTP function and the Grand Master clock.
- **Renewal Interval** is not configurable and is set to **150** seconds which determines the interval used by the 1588 PTP function to initiate the renewal of its lease with the Grand Master clock.

➤ GM Info

Note: *Only available when Grand Master clock information is available.*

The Grand Master Information window displays the decoded clock information.

For G.8265.1 only:

- **Identity** reports the 8-byte identification code of the Grand Master Clock.

For G.8275.1 only:

- **Port Identity** reports the identity type of the PTP port.
- **GM Identity** reports the clock identity of the Grand Master Clock.
- **Priority 1** reports the priority 1 attribute of the Grand Master Clock.
- **Priority 2** reports the priority 2 attribute of the Grand Master Clock.
- **Steps Removed** reports the number of communication paths crossed between the local clock and the Grand master Clock.
- **Log Message Interval (Announce)** reports the mean time interval between successive Announce messages.
- **Log Message interval (Sync)** reports the mean time interval between successive Sync messages.

For both G.8265.1 and G.8275.1:

- **Clock Class** reports the description and code of the Grand Master Clock Class.

Code	Description
0-5, 8-12, 15-51, 53-57, 59-67, 123-132, 171-186, 188-192, 194-215, 233-247, 249-254	Reserved
6	Sync to primary reference
7, 14	Holdover
13	Sync to application-specific reference
52, 58, 187, 193	Degraded
68 to 79, 81-109 (odd values), 11-122, 133-170, 216-232	Alternate PTP profiles
80-110 (even values) ^a	Quality Level (QL-xxx ^a)
248	Default
255	Slave only

a. Refer to QL table on page 399 for the list of Quality Level values that will be used as the description.

- **Clock Mode** reports the description of the Grand Master Clock Mode: **Two-step** or **One-step**.
- **Clock Accuracy** reports the accuracy of the clock.
- **Time Source** reports the source of time used by the Grand Master Clock.

Alarm Timeout/Threshold

Note: *The following parameters are also used to declare the Pass/Fail verdict.*

- **Receipt Timeout** defines the threshold used to declare a **Loss Announce** or **Loss Sync** message alarm: **2** to **255** messages (default is **3** messages). A message is considered lost if not received within its expected arrival time and a loss alarm is declared when the number of consecutive lost messages is greater than or equal to the defined **Receipt Timeout**.
- **IPDV Threshold** defines the inter packet delay variation threshold used to raise the **Unusable** message alarm. The alarm is raised when IPDV is not within the configured **IPDV Threshold: 0.001** to **1000ms** (default is **2ms**). The minimum value of 0.001 is adjusted when the **Sync** or **Delay Req** is set to 4 messages/s or less.

Quality Level

The quality level characterizes the clock quality in terms of network synchronization.

- **QL Mismatch Monitoring** when selected (default) enables the Quality Level mismatch monitoring.
- **Expected QL** allows, when **QL Mismatch Monitoring** check box is selected, the selection of the Expected Quality Level value: default value is **QL-EEC2/ST3** for G.8265.1 and **QL-SSU-B/ST3E** for G.8275.1. Refer to page 399 for more information.

Pass/Fail Verdict

Pass/Fail Verdict check box when selected (default) enables the use of the pass/fail verdict. The global pass/fail verdict is based on the following criteria: alarms (**Link Down**, **Loss Sync**, **Loss Announce**, **Unusable** (G.8265.1), and/or **QL Mismatch** (when **QL Mismatch Monitoring** is enabled)), or the test is automatically aborted (service request denied, session canceled, or no reply for G.8265.1; sync message rate changed for G.8275.1).

Restore 1588 PTP Defaults

Reverts the 1588 PTP test application to its default factory settings.

BERT

From the **Test** menu, tap **Setup, Test Configurator**, and tap on the **BERT** block.

Pattern

The icon next to the **Pattern** label indicates the status of the received pattern signal. Refer to *Status Bar* on page 24 for more information.

- **Coupled RX to TX** check box is always selected and allows coupling both the TX and RX signal with the same test pattern.
- **No Pattern Analysis (Live)** check box when cleared (default), monitors the received traffic pattern. For live traffic, the **No Pattern Analysis (Live)** check box should be selected as the traffic is a live pattern thus there is no analysis of pattern loss, bit error, and no traffic indications. Only available with a framed test.
- **TX Pattern/RX Pattern** sets respectively the TX and RX test pattern.

40/100G Interfaces:

Test	
OTN BERT - framed	PRBS9, PRBS15, PRBS20, PRBS23, PRBS31 (default), Null Client, and User Pattern.

Interfaces up to 10G:

Pattern	DS0, E0	DS1	DS3, E1	E3, E4	SONET/SDH	OTN
0000 1010 1100 1111 1in8 1in16 2in8	X	X	X	X	X	-
3in24	X	X	X	X (E3 only)	-	-
T1 DALY 55 OCTET Multi-Pattern	-	X	-	-	-	-
PRBS9	X	X	X	X	X	X
PRBS11	X ^a	X	X	X	X	
PRBS15	-	X	X ^a	X	X ^b	X
PRBS20 User Pattern	X	X	X	X	X	X
PRBS23	-	X	X	X ^a	X ^c	X
PRBS31	-	X	X	X	X ^d	X ^a
QRSS	-	X ^a	-	-	-	-
Null Client	-	-	-	-	-	X

- a. Default value.
- b. Default value for VT1.5/TU-11/TU-12.
- c. Default value for HOP and all other SONET/SDH concatenations from STS-1/AU-3/AU-4/TU-3 up to STS-48c/AU-4-16c.
- d. Default value for STS-192c/AU-4-64c.

For Multi-Pattern, see *Multi-Pattern Configuration* on page 128.

When **User Pattern** is selected, enter the payload pattern hexadecimal value.

- **Invert** check box, when selected (cleared by default), inverts the test pattern meaning that every 0 will be changed for 1 and every 1 for 0. For example, the pattern 1100 will be sent as 0011. Not available when pattern is Multi-Pattern.

Bit Error

- **Pass/Fail Verdict** allows to enable bit-error-rate pass/fail verdict by selecting either **Bit Error Count** or **Bit Error Rate**. The default value is **Disabled**.
- **BER Threshold** allows to enter the threshold **Count** or **Rate** value that will be used to declare the pass/fail verdict. The **BER Threshold** applies to individual pattern for **Multi-Pattern**.

For **Count**, enter the maximum bit error count allowed before declaring a fail verdict: **0** (default) to **999999**.

For **Rate**, enter the maximum bit error rate allowed before declaring a fail verdict: **1.0E-14** to **1.9E-01**. The default value is **1.0E-12**.

Service Disruption

The Service Disruption Time (SDT) corresponds to the duration associated to a defect that occurred in the network. For example a disruption that occurs during a network switching from the active channels to the backup channels or vice versa.

Note: *The service disruption measurements are cleared when changing the criteria. Service Disruption is not available for **Multi-Pattern**.*

- **Defect** allows to choose on which layer and defect the service disruption time test will be performed. Choices depend on the selected test path.

Layer	Defect
Interface	OTN/SONET/SDH: LOS ^a DSn: LOS, BPV, EXZ PDH: LOS, CV
Section/RS	LOF-S/RS-LOF, B1
Line/MS	AIS-L/MS-AIS, RDI-L/MS-RDI, REI-L/MS-REI, B2

Layer	Defect
STS/AU Path	AIS-P/AU-AIS, LOP-P/AU-LOP, RDI-P/HP-RDI, REI-P/HP-REI, B3, UNEQ-P/HP-UNEQ, PDI-P (SONET)
VT/TU Path	AIS-V/TU-AIS, LOP-V/TU-LOP, UNEQ-V/LP-UNEQ, RDI-V/LP-RDI, REI-V/LP-REI, BIP-2
DS1	AIS, OOF, RAI, Framing Bit, CRC-6
DS3	AIS, OOF, Idle, RDI, F-Bit, C-Bit, P-Bit, FEBE
E1	AIS, CRC-4, E-Bit, LOMF, TS16 AIS, LOF, FAS, RAI, RAI MF
E4, E3, E2	AIS, LOF, FAS, RAI
OTL ^b	LOF, OOF, LOL, LOR, OOR, Inv. Marker, FAS
FEC	FEC CORR, FEC UNCORR
OTUk ^c	AIS, LOF, OOF, LOM, OOM, BDI, IAE, BIAE, BIP-8, BEI, FAS, MFAS
ODUk ^c	AIS, OCI, LCK, BDI, BIP-8, BEI, FSF, BSF, FSD, BSD
OPUk ^c	AIS, CSF, PLM ^d
BER ^e	Pattern Loss, Bit Error (default)

- a. Not available with QSFP transceivers.
- b. The service disruption time measurement is available per lane for OTL defects at the exception of LOL which is global for all lanes. Refer to *OTL-SDT* on page 387 for results per lanes.
- c. Only available on the top layer.
- d. Available when the PLM check box is selected (refer to page 157 for more information).
- e. Available when the **No Pattern Analysis (Live)** check box (see page 124) is cleared.

Note: *The Service Disruption Time measurement supports a parent defect approach where the SDT measurement is triggered when the selected defect or a higher defect in the signal structure hierarchy is detected. For example, if Bit Error is selected, an OPU AIS error will trigger an SDT event.*

- **No Defect Time (ms)** represents the period without any defects before stopping SDT measurement: **0.005 ms** to **2000 ms** (default is **300 ms**).
- **Disruption Monitoring** check box when selected (disabled by default) enables the disruption time measurements. However, the measurement will only start if the test is already started, or when the test will be started.

Note: Clearing the **Disruption Monitoring** check box will stop the measurement without clearing the results. The disruption monitoring is automatically stopped without clearing results when the test is stopped. However, starting the test again while the **Disruption Monitoring** check box is selected will reset the results before restarting.

- **Pass/Fail Verdict** check box when selected (cleared by default) enables service disruption pass/fail verdict and allows to set the threshold value.
- **SDT Threshold (ms)** allows to enter the SDT threshold value that will be used to declare the pass/fail verdict: **0.001 to 299999.999 ms** (default is **50 ms**). For EtherBERT, the minimum value is adjusted with respect to the **No Traffic Time**.

Multi-Pattern Configuration

Note: Only available for **DSN/PDH BERT** test application with **DS1** signal (**DS0** disabled) and when the pattern is **Multi-Pattern**.

This feature allows sending each pattern for a specific duration, sequentially and continuously.

- **Pattern** represents a sequence of patterns that will be generated: **1111**, **1in8**, **2in8**, **3in24**, and **QRSS**.
- **Enable** allows enabling the generation of each pattern individually in the pattern sequence. All patterns are enabled by default. All 1's (1111) is disabled for **Unframed** test.
- **Individual Pattern Duration** specifies the transmission duration of each pattern: **15 s**, **30 s**, **45 s**, **1 min**, **2 min**, **3 min** (default),... up to **15 min**.

Restore < Test Application > Defaults


Reverts the current test application to its default factory settings.

Cable Test

From the **Test** menu, tap **Setup**, **Test Configurator**, and the test block.

Global Options

- **Wiring Standard** is the pin-to-pair assignment corresponding to the UTP cable used: **T568A** (default) or **T568B**.

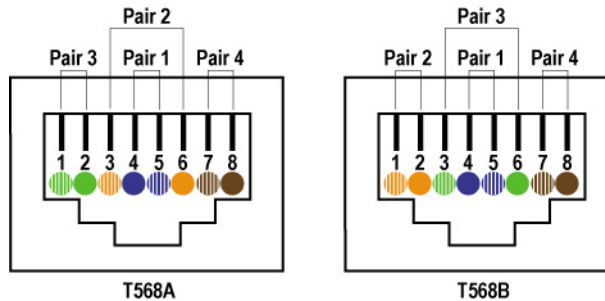

- **Length Unit** is the unit used for cable length and distance to fault results: **Meter** (default) or **Feet**.
- **PoE** check box when selected (cleared by default) allows to verify that the Power Sourcing Equipment (PSE) is capable to deliver appropriate power (PoE) to the Powered Device (PD). The PoE test is performed after the cable test is executed confirming that the cable is ready to carry data and power: either the Wire Map test reported **No fault**, **Straight pair**, **Crossed Pair**, or **Noise (link up)**. Not available on 890 and 890NGE (100G).

Test Setup - Test Configurator, Timer, and System

Cable Test

- **Power Class**, available when PoE is enabled, selects the power class of the simulated powered device:

Power Class	Power Device
Class 0 (13.0W) - (default)	Type 1
Class 1 (3.8W)	
Class 2 (6.5W)	
Class 3 (13.0W)	
Class 4 (25.5W)	Type 2

Pass/Fail Verdict

- **Pass/Fail Verdict** check box when selected (default) enables the cable test pass/fail verdict and allows to set the threshold values.
 - **Prop. Delay Threshold (ns)** is the maximum time for a pulse to reach the far end: **0** to **1000** ns (default is **1000** ns for 10 Mbit/s, **556** ns for 100 Mbit/s, and **570** ns for 1 Gbit/s).
 - **Delay Skew Threshold (ns)** is the maximum time between the fastest and slowest pairs of a 1000 Base-T signal: **0** to **120** ns (default is **50** ns).
 - **Length Threshold (m)** is the maximum acceptable cable length: **0** to **120** m (0 to 394 feet) (default is **100** m (328 ft)).
 - **PoE Loaded Voltage Thresholds (V)**, available when the **PoE** check box is selected, allows the configuration of the acceptable voltage range when a load is applied: minimum value is either **37** (default) for Class 0 to 3 or **42.5** (default) for Class 4; maximum value is **57** (default). A Pass verdict is declared when the measured voltage is within the defined range.

Restore Cable Test Defaults

Reverts the configured parameters to their default values.

CFP4/QSFP/SFP+

This tab gives hardware information related to the inserted transceiver module.

From the **Test** menu, tap **Setup**, **Test Configurator**, tap on the interface block or on the **Local** block for iSAM, and on the CFP4/QSFP/SFP+ tab.

Clock

Allows the configuration of the clock synchronization.

From the **Test** menu, tap **Setup**, **Test Configurator**, and tap on the clock block.

Clock Synchronization

Clock Mode allows to select the source clock that will be used for transmission (TX). The clock mode is forced to **Recovered** for 1GE electrical interface using **Slave** local clock (see **Local Clock** on page 160). For CPRI single port topology, the clock is configurable to **Internal** or **External**; for dual port topology, the clock block is not displayed and the clock mode is automatically set to **Internal** for the Base Station and **Recovered** for the Remote Radio Head.

- **Internal:** Internal clock of the unit (STRATUM 3).
- **Recovered:** Line clock from the input port signal involved in the test. Available with Transport test applications and Ethernet applications using 10G WAN.
- **External:** Clock signal from the EXT CLK port.

Ext Clock In

Note: Available when the **Clock Mode** is set to **External**.

Allows to set the external clock for test synchronization.

- **Interface Type** allows the selection of the clock interface: **DS1** (default), **E1**, **2MHz**, or **1PPS**. **1PPS** is automatically selected for **Dual Test Set in One-Way Latency** measurement mode.

Ext Clock In on a green background indicates that a valid clock is received.

LOS on a red background indicates that the received clock is not valid.

- **Connector** either indicates that the BNC connector type is used for the clock or allows the selection of **Bantam** or **RJ48C** when the BNC connector is used by the test application. The NetBlazer V2 Series connector blue LED used for Ext Clock In is flashing. Not available on 890 and 890NGE (100G).
- **Termination** mode specifies how the NetBlazer V2 Series is connected to the synchronization signal. The **Termination** mode is set to **TERM** for 2MHz and configurable for DS1 and E1.

For DS1:

- **TERM** provides an input that terminates the DS1 signal.
- **DSX-MON** provides high-input impedance and compensation for resistive loss. This setting is useful for monitoring DS1 signals at DSX monitor points, which are resistor-isolated.
- **BRIDGE** provides high-input impedance for bridging lines that are already terminated. This setting is useful for bridging directly across copper cable pairs.

For E1:

- **TERM** provides an input that terminates the E1 signal.
- **MON** provides high-input impedance and compensation for resistive loss. This setting is useful for monitoring E1 signals at monitor points, which are resistor-isolated.
- **BRIDGE** provides high-input impedance for bridging lines that are already terminated. This setting is useful for bridging directly across copper cable pairs.
- **Line Coding** allows the selection of the interface line coding.

For DS1: **AMI** and **B8ZS** (default).

For E1: **AMI** and **HDB3** (default).

- **Framing:** Allows the selection of the interface framing.

For DS1: **SF**, **SLC-96**, and **ESF** (default).

For E1: **PCM30** (default), **PCM30 CRC-4**, **PCM31**, and **PCM31 CRC-4**.

- **Frequency (MHz)** displays the frequency of the received signal rate.
- **Offset (ppm)** displays the positive or negative frequency offset between the standard rate specification and the rate from the received signal. The background color is used to indicate if the received clock meets (green) or not (red) the standard rate specification.

Signal	Standard Rate specification
DS1	1544000 ± 8 bit/s (± 4.6 ppm)
E1	2048000 ± 10 bit/s (± 4.6 ppm)
2MHz	2048000 ± 10 bit/s (± 4.6 ppm)

Ext Clock Out

Note: Available when the **Clock Mode** is set to **Internal**, or **Recovered**. Not available on FTB-870v2/870Q.

Allows to set the clock that will be generated.

- **Interface Type** allows the selection of the clock interface: **DS1** (default), **E1**, and **2MHz**.

Ext Clock Out on a green background indicates that a valid clock is generated on the clock port.

LOC on a red background indicates that no clock is generated on the clock port.

- **Connector** either indicates that the BNC connector type is used for the clock or allows the selection of **Bantam** or **RJ48C** when the BNC connector is used by the test application. Not available on 890 and 890NGE (100G).
- **LBO** (Line Build Out), available with DS1 only, allows the selection of the interface Line Build Out that meets the interface requirements over the full range of cable lengths: **DSX-1 (0-133 ft)** (default), **DSX-1 (133-266 ft)**, **DSX-1 (266-399 ft)**, **DSX-1 (399-533 ft)**, and **DSX-1 (533-655 ft)**.
- **Line Coding**, available with DS1 and E1, allows the selection of the interface line coding.
For DS1: **AMI** and **B8ZS** (default).
For E1: **AMI** and **HDB3** (default).
- **Framing**, available with DS1 and E1, allows the selection of the interface framing.
For DS1: **SF**, **SLC-96**, and **ESF** (default).
For E1: **PCM30** (default), **PCM30 CRC-4**, **PCM31**, and **PCM31 CRC-4**.

REF OUT

Note: *Available with FTB-890 and 890NGE (100G).*

Frequency (MHz) displays the frequency of the generated clock signal on the **REF OUT** port based on the test interface/rate.

Clock Out indicates that a clock is generated on the **REF OUT** port (green) or not (red).

Note: *The Ref Out clock port provides an eye diagram timing reference for 10G and above optical devices. This clock is provided for basic assessment. Formal qualification may require specialized external circuitry.*

EtherBERT, FC BERT, BERT (CPRI), and Unframed BERT

From the **Test** menu, tap **Setup**, **Test Configurator**, and tap on the **EtherBERT**, **FC BERT**, **BERT**, or **Unframed BERT** block.

Pattern

- **Coupled RX to TX** check box, when selected (default), couples both the TX and RX signal with the same test pattern. The **Coupled RX to TX** check box is selected and not configurable for **Seed A**, **Seed B**, and **PRBS31 Unscrambled** patterns as well as for Wireless CPRI/OBSAI BERT test.
- **No Pattern Analysis (Live)** check box when cleared (default; selected by default for framed CPRI), monitors the incoming traffic pattern and Round-Trip Latency. For live traffic, the **No Pattern Analysis (Live)** check box should be selected as the traffic is a live pattern and in this case no monitoring is required. Even if this check box is not available for FC BERT, the received traffic pattern and Round-Trip Latency are monitored. See *BER* on page 314 for more information.
- **TX Pattern/RX Pattern**: Select the test pattern from the list for each direction (TX and RX) if required. Choices are **PRBS9**, **PRBS11**, **PRBS15**, **PRBS20**, **PRBS23**, **PRBS31** (default), **Seed A**¹, **Seed B**¹, **PRBS31 Unscrambled**¹, **CSPAT**², **CJTPAT**², **CRPAT**², **Short CRTPAT**², **Long CRTPAT**², and **User Pattern**.

When **User Pattern** is selected, enter the payload pattern hexadecimal value.

- **Invert** check box, when selected (cleared by default), inverts the generated/expected test pattern meaning that every 0 will be changed for 1 and every 1 for 0. For example, the pattern 1100 will be sent as 0011.

1. Only available for 10G LAN with **Unframed (Interop)** (see Framing on page 109).

2. Only available for 1G optical with **Framed Layer 1** (see Framing on page 109).

Test Setup - Test Configurator, Timer, and System

EtherBERT, FC BERT, BERT (CPRI), and Unframed BERT

Bit/Pattern Error

The configuration of **Bit Error** is available with all patterns at the exception of **Seed A** and **Seed B** for which **Pattern Error** is available.

- **Pass/Fail Verdict** allows to enable and configure bit/pattern error rate/count threshold prior to run the test. This allows for a simple pass/fail verdict, leaving no room for misinterpretation of the test results. To enable the pass/fail verdict, select either **Bit/Pattern Error Counter** **Bit/Pattern Error Rate** (default is **Disabled**).
- **BER Threshold** allows to enter the threshold **Count** or **Rate** value that will be used to declare the pass/fail verdict.

For **Count**, enter the maximum bit/pattern error count allowed before declaring a fail verdict: **0** (default) to **999999**.

For **Rate**, enter the maximum bit/pattern error rate allowed before declaring a fail verdict: **1.0E-14** to **1.9E-01**. The default value is **1.0E-12**.

CPRI

Note: *Available with CPRI/OBSAI BERT test application with CPRI Framed L2.*

Pass/Fail Verdict check box when selected (default) enables the pass/fail verdict. A pass verdict is given when the link status is up and no CPRI alarm and/or error are recorded for the duration of the test.

Restore CPRI/OBSAI Defaults

Note: *Available with CPRI/OBSAI BERT test application.*

Reverts the current test application to its default factory settings.

Service Disruption

Note: *Not available for FC BERT.*

- **No Traffic Time** (ms) represents the time between two Ethernet Frames that is acceptable without raising an alarm including a Service Disruption event: **0.005 ms** to **1000 ms** in step of 0.005 ms (default is **50 ms**). Only available with EtherBERT.
- **No Defect Time (ms)** represents the period without any defects before stopping SDT measurement: **0.005 ms** to **2000 ms** (default is **300 ms**). Only available with CPRI/OBSAI.
- **Disruption Monitoring** check box when selected (disabled by default) enables the disruption time measurements. However, the measurement will only start if the test is already started, or when the test will be started.

Note: *Clearing the **Disruption Monitoring** check box will stop the measurement without clearing the results. The disruption monitoring is automatically stopped without clearing results when the test is stopped. However, starting the test again while the **Disruption Monitoring** check box is selected will reset the results before restarting.*

- **Pass/Fail Verdict** allows to enable and configure the SDT Threshold.
- **SDT Threshold** allows to configure the amount of time with no traffic that is accepted before failing the test: **0.005** to **299999.995** ms in step of 0.005 ms (default is **50** ms). The threshold value cannot be less than the **No Traffic Time** value.

Test Setup - Test Configurator, Timer, and System

EtherBERT, FC BERT, BERT (CPRI), and Unframed BERT

FC Frame

Note: *Only available with FC BERT.*

Frame Size (Bytes) allows to enter the frame size (in step of 4 bytes) for FC BERT test application: **40** to **2148** bytes (default). However the minimum frame size is 64 bytes when the **Latency Tag** check box is selected.

Latency Tag Insertion

Note: *Only available with FC BERT.*

Round trip latency measures the average round trip latency (delay) between the time the data was transmitted and received.

- **Latency Tag** check box when selected, enables latency measurements.
- **Pass/Fail Verdict** check box when selected, enables the pass/fail verdict and allows to set the **Round-Trip Latency Threshold**.
- **Round-Trip Latency Threshold (ms)** allows the selection of the round trip latency: **0.015** (default) to **8000 ms**.

Shaping

- **TX Rate** allows the selection of the transmission rate in percentage of utilization (100 percent by default), Mbit/s, Gbit/s, Frame/s, or IFG for Ethernet; Mbit/s, Gbit/s, MB/s, or % for Fibre Channel. For Ethernet, the maximum percentage is 105 percent depending on the frame size selected.
- **Enable TX** check box is automatically selected when starting the test allowing stream generation; automatically cleared when the test stops. The **Enable TX** check box may also be selected or cleared while the test is running. Not available for FC BERT.

Ethernet Frame

Frame Size (Bytes) allows to enter the frame size for Ethernet test applications. The range is from **64**¹ to **16000**².

The following table lists each component that may affect the minimum frame size values.

Component	Description
VLAN	4 bytes per VLAN (up to 3 VLAN)
EoE Header	16 bytes
EoE VLAN	4 bytes
PBB-TE Header	18 bytes
B-VLAN	4 bytes
UDP	8 bytes
TCP	20 bytes
Ethernet Header	14 bytes
LLC and SNAP Headers	8 bytes
IPv4	20 bytes
IPv6	40 bytes

Note: *Sending traffic with frame size >1518 in switched network may result in losing all frames.*

-
1. The minimum frame size will be adjusted according to the frame structure and components selected.
 2. The maximum frame size is limited to 10000 for 10/100/1000Mbps electrical interface.

EtherSAM - Burst

Note: The **Burst** settings are only available for configuration when the **Burst Test** check box is selected (see page 144).

From the **Test** menu, tap **Setup**, **Test Configurator**, tap on the test block, and on the **Burst** tab.

Note: The burst configuration parameters are defined globally for all services but **CBS**, **EBS**, and **Burst Max Rate** parameters are as per each service configuration.

Burst Sequence

The graphic illustrates the configured burst sequence that contains in order, from left to right:

- **Refill Delay** represents the pre-burst recuperation time in percentage that is equal to the remaining percentage not used by the post-burst time (**Refill Delay Ratio**).
- **Burst Frames** represents the burst frame ratio in percentage that is equal to the subtraction of **100 % - Burst/IR Frame Ratio**.
- **Refill Delay** represents the post-burst recuperation time in percentage that is equal to the configured **Refill Delay Ratio**.
- **CIR or CIR+EIR Frames** represents the percentage of transmission at CIR or CIR+EIR rate. The **CIR or CIR+EIR Frames** percentage is equal to the configured **Burst/IR Frame Ratio**.
- The “. . .” next to the burst sequence indicates that the burst sequence is repeated the number of times specified in the **Number of Burst Sequence** field.

Parameters

- **Number of Burst Sequence** is the number of times, **1** to **100** (default is **2**), the burst sequence will be repeated for the CBS and EBS tests.
- **Refill Delay Ratio (%)** is the percentage of time required to refill the CBS/EBS token buckets. The refill delay ratio is used for post-burst delay and the remaining percentage is applied to the pre-burst delay. The **Refill Delay Ratio** is configurable from **0** to **100** percent (**50** percent is the default as well as the standard's minimum recommended value).
- **Burst/IR Frame Ratio (%)** is the percentage of frames transmitted at CIR rate for the CBS test and the percentage of frames transmitted at CIR+EIR rate for the EBS test. The **Burst/IR Frame Ratio** is configurable from **10** to **90** percent (**90** percent is the default as well as the standard's recommended percentage value).

Table

Note: *Test time values are only displayed for enabled services.*

- **Service No** indicates the service number.
- **Service Name** indicates the name of the service.
- **Direction**, available with **Dual Test Set** or **Dual Port** topology, indicates respectively results from local to remote (**L->R**) and remote to local (**R->L**), or P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**).
- **CBS Test Time (s)** indicates the total time required to perform all burst sequence iterations of the CBS test for this service.
- **EBS Test Time (s)** indicates the total time required to perform all burst sequence iterations of the EBS test for this service.
- **Total Burst Test Time (s)** indicates the total time required to perform all burst sequence iterations of both **CBS** and **EBS** tests for this service.

EtherSAM - Global

From the **Test** menu, tap **Setup, Test Configurator**, tap on the test block, and on the **Global** tab.

Dual Test Set

- **Dual Test Set (DTS)** check box when selected (cleared by default) enables EtherSAM **Dual Test Set**. Once **Dual Test Set** is enabled, use the **Discover Remote** button to select a remote unit. Not available in **Dual Port** topology.

Note: *Alternatively it is possible to use the Discover Remote button to connect to a remote module and automatically enable the Dual Test Set. For more details, refer to Discover Remote Button on page 572.*

- **Disconnected** indicates that there is no connection established with a remote module.
- **Connected** indicates that the connection is established with a remote module.
- **Discover Remote** button allows to discover remote modules supporting **Remote Loopback** and/or **Dual Test Set**. For more details, see *Discover Remote Button* on page 572.

Subtests

- **Service Configuration Test** verifies if the network configuration is correct for each service before starting a long term test (Service Configuration Test). To test the network configuration, a ramp test and/or a burst tests is/are generated for each configured service.
- **Seconds per Service** indicates the **Service Configuration Test** duration in seconds based on the configured Services, Ramp, and Burst settings.
- **Ramp Test** check box when selected (default):

In the first stage of the test, when **CIR** check box is selected (see *SLA Parameters* on page 254), the throughput is increased incrementally in steps until the CIR level is reached. During the first stage, the maximum Jitter, Latency, Frame Loss, and throughput are measured and are compared to the SLA thresholds to declare a pass/fail verdict.

In the second stage of the test, when the **CIR+EIR** check box is selected (see *SLA Parameters* on page 254), the throughput is increased to the **CIR+EIR** level to compare against expected maximum throughput threshold to declare a pass/fail verdict.

In the third stage of the test, when the **Traffic Policing** check box is selected (see *Test Parameters* on page 253), the throughput is increased one step over the **CIR+EIR** if selected otherwise over the **CIR** to compare against expected maximum throughput threshold to declare a pass/fail verdict.

The ramp test procedure is generated for each enabled service.

- **Burst Test** check box when selected (cleared by default) verifies that the expected burst size can be transmitted at maximum burst rate with minimal loss.

CBS (Committed Burst Size) check box when selected (see *SLA Parameters* on page 254), verifies the performance of a committed burst size at **CIR**'s average **TX** rate.

EBS (Excess Burst Size) check box when selected (see *SLA Parameters* on page 254), verifies the performance of an excess burst size at **CIR+EIR**'s average **TX** rate.

The maximum Jitter, Latency, Frame Loss, and throughput are measured. For **CBS**, the Jitter, Latency, and Frame Loss are compared to the SLA thresholds to declare a pass/fail verdict. For **EBS**, the throughput is compared to the SLA thresholds to declare a pass/fail verdict.

The burst test procedure is generated for each enabled service.

- **Service Performance Test** check box when selected (default) verifies that the **SLA** parameters (see *SLA Parameters* on page 254) are met over time by running multiple services simultaneously. The maximum Jitter, Latency, Frame Loss, and average throughput are measured and compared to the configured thresholds to declare pass/fail verdicts. The **Service Performance Test** is only performed for services that have their **CIR** check box selected.

Subtest Duration allows to set the duration time, in HH:MM:SS format, for the **Service Performance Test** (default is 10 minutes).

- **Global Test Duration Estimate** indicates the total estimate duration of the test.

Global Options

- **Per Direction Configuration** check box when selected (default) specifies that the values can be configured independently for each direction (local to remote and remote to local) for **Dual Test Set** or for each port (P1 to P2 and P2 to P1) for **Dual Port**; for **Dual Port** using a different rate on each port, the check box is forced selected. When the **Per Direction Configuration** check box is cleared the configuration will be coupled and the values apply to both directions/ports.

Note: *For Dual Test Set the Per Direction Configuration is only available when the communication with the remote module is established.*

- **Pass/Fail Verdict** check box when selected (default) enables the pass/fail verdict. A global pass/fail verdict is given for the EtherSAM test, **Service Configuration**, and **Service performance** (for each service). The pass/fail verdict is based on the following criteria: **Frame Loss**, **Max Jitter**, **Round-Trip Latency**, and **Average RX Rate**.
- **Latency Measurement Mode**, available with **Dual Test Set** for rates from 10M to 10GE, allows the selection of the latency measurement mode: **Round-Trip** (default) or **One-Way**.

Synchronization with an external 1PPS clock is required to perform One-Way Latency measurement. One-Way Latency is only possible when both local and remote 1PPS signal clocks are valid. The following alarms are available with One-Way Latency measurement.

LOPPS-L and **LOPPS-R** (Loss Of Pulse Per Second - Local/Remote) are declared when either no pulse is received or when no pulse is received within 1 second $\pm 6.6 \mu s$ after the previous pulse. LOPPSS-R is only monitored once the DTS connection is established.

Restore EtherSAM Defaults

Reverts the current test application to its default factory settings.

EtherSAM - Ramp

Note: The **Ramp** tab is only available for configuration when the **Ramp Test** check box is selected (see page 144).

From the **Test** menu, tap **Setup**, **Test Configurator**, tap on the test block, and on the **Ramp** tab.

Note: The ramp configuration parameters are defined globally for all services but the presence of CIR+EIR, and Traffic Policing steps are as per each service configuration. CIR, CIR+EIR, and Traffic Policing steps are part of the step list as soon as they are enabled for at least one service even if that service is not enabled.

Dynamic Ramp

The graphic displays the percentage of each CIR level step in time.

Step Time

The step time is the test duration for each ramp step: **5** (default) to **60** seconds.

Ramp Duration

The ramp duration indicates the total time required to perform all the ramp steps for each service.

Add Step

Allows to add a new ramp step. Enter the CIR percentage from **1** to **99**. A maximum of 7 pre CIR steps can be added in the ramp configuration.

Delete Step

Allows to delete a step from the ramp. Select the step from the list and tap on **Delete**.

Defaults

Reverts the ramp configuration to its default factory settings.

Fibre Channel

From the **Test** menu, tap **Setup, Test Configurator**, and the **Fibre Channel** block.

World Wide Name (WWN)

The following WWN settings are only available when the **Login - Enable** check box is selected (see page 151).

- **Source** allows to set the 64-bit WWN address of the local fibre channel port: **00-00-00-00-00-00-00-00** to **FF-FF-FF-FF-FF-FF-FF-FF** (default is **20-00-00-03-01** [IEEE-MAC lsb (bits 23..0)]).
- **Destination** allows to set the 64-bit WWN address of the remote fibre channel port: **00-00-00-00-00-00-00-00** (default) to **FF-FF-FF-FF-FF-FF-FF-FF**. The destination WWN address is displayed and grayed-out for Point-to-Point topology after a successful login.

Buffer to Buffer Flow Control

Buffer to Buffer (BB) Flow Control, also called Flow Control Management, manages the control of data traffic between the local and remote fibre channel ports based on the network, distance, and traffic congestion.

Each remote port advertises the buffer size (**BB_Credit**) during the login.

- **Enable** check box when selected allows to set or use buffers to receive frames. The **Enable** check box is force selected when the **Login - Enable** check box is selected (see page 151).
- **Available BB_Credit** is the number of frame buffers that the remote port has available to receive frames from the local port: **1 to 65535** (default is **10**). The **Available BB_Credit** is not editable when the **Login - Enable** check box is selected but its value received from the remote interface through the login process is displayed. If the login fails, the **Available BB_Credit** displays “-”.

Login

After a link is established, it is possible to login to the Fibre Channel Network to send and receive data between a local and remote fibre channel port.

- **Enable** check box when selected (default) allows to press the **Login** button to start the login process.
- **Advertised BB_Credit** is the number of frame buffers the local port has available to receive frames from the remote port: **1** to **65535** (default is **10**). **Advertised BB_Credit** is advertised to the remote port through the **Login** process. Changing the **Advertised BB_Credit** requires to manually re-send a login using the **Login** button.
- **Login/Re-Login** button allows the initiation of the Login process with the selected **Advertised BB_Credit**. Available when the **Login - Enable** check box is selected. The **Login** button initiates a log-in when not logged-in while the **Re-Login** re-initiates a log-in after changing the **BB_Credit** and/or **WWN** when already logged-in. The capability to login is available only with Framed Layer 2 (FC-2) when a successful link has been established. There are two Login processes supported by Fibre Channel: **Port Login** (PLOGI) and **Fabric Login** (FLOGI).

It is possible to skip the **Login** procedure and use the **BB_Credit** value. This is called **Implicit Login** and is only applicable for **Point-to-Point** topology. For **Point-to-Point** topology using implicit login, you must manually configure the **Available BB_Credit** value for the remote port.

- **Discovered Topology** indicates the discovered topology.

Fabric: Ports are interconnected to a fabric switching network.

A **Fabric** and **Port** login are required, and the **BB_Credit** value is set based on the buffer capacity of the fabric switch.

Point To Point: Direct link between two ports.

Test Setup - Test Configurator, Timer, and System

Fibre Channel

- **Fabric Status** indicates the status of the Fabric switching network. The status is not available when the discovered topology is Point-to-Point.
 - **Logged-in** indicates that the login process has completed successfully.
 - **Failed** indicates that the login process is not completed successfully or an error has been detected.
 - **In Progress** indicates that the login process is running (not completed yet).
 - **Logged-out** (default) indicates that the system has not logged in yet or has received a valid Logout command from the remote port.
- **Port Status** indicates the state of the port login process.
 - **Logged-in** indicates that the login process has completed successfully.
 - **Failed** indicates that the login process is not completed successfully or an error has been detected.
 - **In Progress** indicates that the login process is running (not completed yet).
 - **Logged-out** (default) indicates that the system has not logged in yet, has received a valid Logout command from the remote port, or the Fabric status is either Failed, In Progress, or Logged-out.

Frequency

From the **Test** menu, tap **Setup**, **Test Configurator**, tap on the interface block, and on the **Frequency** tab.

TX Frequency

- **TX Frequency (GHz)** indicates the frequency (actual frequency + Frequency offset) used for transmission.
- **Offset (ppm)** check box, when selected (cleared by default), allows to set the frequency offset that will be generated. Use the “+” or “-” button to respectively increment or decrement the frequency offset value based on the defined **Increment/Decrement Size**, or directly type the frequency offset value in the field. The range is ± 120 ppm for Ethernet test applications, and ± 50 ppm for Transport test applications.

Interface	Frequency Offset ^a	Nominal Frequency
OTU3	± 50 ppm (Framed)	43018413559 bit/s
OTU3e1		44571000000 bit/s
OTU3e2		44583000000 bit/s
OTU4		111810000000 bit/s

- a. The frequency offset range is guaranteed for a source signal at 0 ppm. In the event that the source signal already has an offset, then the output signal may exhibit an offset larger than the range specified.

Step Size (ppm) allows to set the increment/decrement value (from 0.1 to either 50 or 120 depending on the test configuration) that will be used when changing the frequency offset with the “+” or “-” button.

Note: The following frequency statistics are available for each lane.

RX Frequency

- **Frequency (GHz)** indicates the frequency of the input signal.
- **Offset (ppm)** indicates the frequency offset between the standard rate specification and the rate at the input signal.

Note: For both **Frequency** and **Offset** the following background colors are used.

Background color	Description
Green	The frequency is in range.
Red	The frequency is out-of-range or LOC Lane. LOC is also displayed.
Gray	Pending state.

- **Max. Negative Offset (ppm)** indicates the maximum negative frequency offset between the standard rate specification and the rate from the received signal.
- **Max. Positive Offset (ppm)** indicates the maximum positive frequency offset between the standard rate specification and the rate from the received signal.

Note: Refer to Interface on page 331 for more information on standard rate specifications.

FTFL/PT

From the **Test** menu, tap **Setup, Test Configurator**, tap on the signal block, and on the **FTFL/PT** tab.

FTFL

Allows the configuration of the Forward and Backward ODU Fault Type Fault Location (FTFL) to be generated.

- **Fault Indication** and **Fault Indication Code** allow the selection of the FTFL fault indicator message/code (byte 0 for forward, byte 128 for backward) to be generated.

Fault Indication	Fault Indication Code (Hex)
No fault	00 (default)
Signal fail	01
Signal Degrade	02
Reserved	03 ^a

- a. Selecting **Reserved** will use the hexadecimal code **03** but, all codes from **03** to **FF** are reserved for future international standardization.

Note: *The **Fault Indication Code** field is automatically updated when the **Fault Indication** is changed and vice versa.*

- **Operator Identifier** allows editing the Operator Identifier to be generated (bytes 1 to 9 for forward, bytes 129 to 137 for backward; 9 characters allowed). By default no Operator Identifier is defined.
- **Operator Specific** allows editing the Operator Specific to be generated (bytes 10 to 127 for forward, bytes 138 to 255 for backward; 118 characters allowed). By default no Operator Specific is defined.

PT

Note: Changing the payload type (PT) does not alter the signal structure; it only modifies the OH value that is generated.

► Payload Type and Code

Generated: Allows to select the payload signal type to be generated either by selecting the payload type from the list or by entering its code in hexadecimal (**00** to **FF**).

Expected: Allows to select the expected payload signal type.

Note: Codes not listed in the table are reserved for future standardization (Reserved For International Standardization).

Payload type	Hex Code	MSB 1234	LSB 5678
Reserved for International Standardization ^a	00	0000	0000
Experimental mapping	01	0000	0001
Asynchronous CBR mapping	02	0000	0010
Bit Synchronous CBR mapping	03	0000	0011
ATM mapping	04	0000	0100
GFP mapping	05	0000	0101
Virtual Concatenation Signal	06	0000	0110
PCS Codeword Transparent Ethernet	07	0000	0111
FC-1200 into ODU2e	08	0000	1000
GFP mapping into extended OPU2	09	0000	1001
OC-3/STM-1 into ODU0	0A	0000	1010
OC-12/STM-4 into ODU0	0B	0000	1011
FC-100 into ODU0	0C	0000	1100
FC-200 into ODU1	0D	0000	1101
FC-400 into ODUflex	0E	0000	1110
FC-800 into ODUflex	0F	0000	1111
Bit Stream with Octet Timing mapping	10	0001	0000
Bit Stream Without Octet Timing mapping	11	0001	0001

Payload type	Hex Code	MSB 1234	LSB 5678
IB SDR mapping into ODUflex	12	0001	0010
IB DDR mapping into ODUflex	13	0001	0011
IB QDR mapping into ODUflex	14	0001	0100
ODU Multiplex with ODTUjk	20	0010	0000
ODU Multiplex with ODTUk.ts/ODTUjk	21	0010	0001
Not Available ^b	55	0101	0101
Reserved Codes for Proprietary Use ^c	80	1000	0000
NULL Test Signal mapping	FD	1111	1101
PRBS Test Signal mapping	FE	1111	1110

- Selecting **Reserved for International Standardization** will use the hexadecimal code 00 but, all codes not listed in the previous table at the exception of those covered in notes b and c are reserved for future standardization.
- Selecting **Not Available** will use the hexadecimal code 55 but, 66 and FF are also Not Available payload types.
- Selecting **Reserved Proprietary** will use the hexadecimal code 80 but, all codes from 80 to 8F are reserved proprietary payload types.

Note: *The **Code** field is automatically updated when the **Payload Type** is changed and vice versa.*

➤ **OPU-PLM**, when selected, enables the OPU-PLM alarm analysis.

Interface (Ethernet, Packet Sync, Fibre Channel, and Wireless)

From the **Test** menu, tap **Setup**, **Test Configurator**, the interface block, and the **Interface** tab.

LINK

An arrow is used to indicate the status of the test link (at the PCS level for parallel interfaces).

- A green arrow indicates that the link is up.
- A red arrow indicates alarms, the link is down.
- A gray arrow indicates awaiting incoming data to provide a status.

The **Local Fault Detected**, **Local Fault Received**, **Remote Fault**, **LOA**, and **Hi-BER** alarm status are displayed. Refer to *Ethernet* on page 324 and *Ethernet - PCS Lanes / PCS* on page 327 for more information.

RS-FEC check box when selected (default), enables the use of the RS-FEC. The **RS-FEC** check box must be selected when using a 100GBASE-SR4 transceiver. Ensure both ends of the circuit have the FEC enabled. Only available on 890 and 890NGE (100G) when the **SR4** check box is selected (see page 108).

Test Setup - Test Configurator, Timer, and System

Interface (Ethernet, Packet Sync, Fibre Channel, and Wireless)

For Ethernet and Packet Sync test applications:

- For optical interfaces, the **Local Fault Detected**, **Local Fault Received**, **Remote Fault**, **LOA**, **Hi-BER**, and/or **WIS Link** (10GE WAN) alarm status are displayed. Refer to *Ethernet* on page 324 and *Ethernet - PCS Lanes / PCS* on page 327 for more information.
- **Auto-Negotiation** check box is available with **10/100/1000M Electrical** and **1GE Optical** interfaces. When the **Auto-Negotiation** check box is selected the test application indicates to the remote port which parameters to use. The **Auto-Negotiation** check box is automatically selected (not configurable) for 1GE Electrical interface and when using an active copper SFP.

Note: *When the **Auto-Negotiation** check box is selected, the port **Speed**, **Duplex**, **Flow Control**, and **Local Clock** parameters can be set. Those settings are not applied immediately to the port, they are used only when the negotiation process is started and take effect only when the auto-negotiation succeeds. However current settings are applied immediately to the port when the **Auto-Negotiation** check box is cleared.*

Test Setup - Test Configurator, Timer, and System

Interface (Ethernet, Packet Sync, Fibre Channel, and Wireless)

- **Speed**, available with **10/100/1000M Electrical** interface, allows the selection of the interface rate: **10M**, **100M**, **1GE**, or **Auto**¹. The negotiated speed will be displayed next to the **Speed** field selection. The **10M** speed is not available with SyncE test application.
- **Duplex** choices for **10M** and **100M** electrical interfaces are **Full Duplex** (default), **Half Duplex**, and **Auto**¹. For other rates the Duplex is set to **Full Duplex**. Availability of choices depend on the test applications. Half Duplex is not available with an active copper SFP. The negotiated duplex will be displayed next to the **Duplex** field selection.
- **Flow Control** choices are **TX**, **RX**, **RX and TX**, **None** (default), and **Auto**¹. When the **Flow Control** is set to **None**, pause frames received are ignored. Availability of choices depend on test applications.
- **Cable Mode** is available with **10/100/1000M Electrical** interface. Availability of choices depend on the test application.

Manual mode is selected when the **Auto-Negotiation** check box is cleared and allows to select the type of cable: **MDI** (default) for straight through cable or **MDIX** for crossover cable.

Automatic mode is selected when the **Auto-Negotiation** check box is selected and allows the 700Gv2/800v2/890 Series to automatically detect the MDI or MDIX cable type.

- **Local Clock** is only available with 1GE interface and allows to set the source of the clock: **Master** (default), or **Slave**, or **Auto**^{1, 2}.

1. **Auto** is only available when the **Auto-Negotiation** check box is selected.

2. Not available with SyncE test application.

Test Setup - Test Configurator, Timer, and System

Interface (Ethernet, Packet Sync, Fibre Channel, and Wireless)

For Fibre Channel test application:

- **PSP (Link Protocol)** (Primitive Sequence Protocol) check box when selected (default) allows link management by activating the port.

For CPRI **Unframed** test application:

- **Scrambling** check box when selected (default) enables the scrambler. Only available with **Unframed** CPRI rates 4.9152 Gbit/s and higher.

For CPRI **Framed L2** test application:

- **Sequence** indicates the last Startup Sequence State: **Standby (A)**, **L1 Sync (B)**, **Protocol (C)**, **L2 C&M (D)**, **Vendor (E)**, **Operation (F)**, or **Passive (G)**.
- **Protocol** defines how the CPRI Startup Sequence negotiates the protocol version.
 - **Auto** can use protocol **Version 1** and **Version 2** during the negotiation.
 - **Version 1** negotiates the protocol with Scrambling disabled. Available with all supported CPRI rates.
 - **Version 2** negotiates the protocol with Scrambling enabled. Available with CPRI rates: 9.8, 6.1, and 4.9 Gbit/s.

Protocol table indicates either the last received (**Version 1** or **Version 2**) or negotiated (**Auto**) protocol version. A light-red background indicates a Protocol version mismatch between the received value and the expected generated value.

Test Setup - Test Configurator, Timer, and System

Interface (Ethernet, Packet Sync, Fibre Channel, and Wireless)

- **C&M Channel** defines the kind of channel that will be used by the startup sequence for negotiation.
 - **Auto** (default): Overhead byte #Z.66.0 can use any of the HDLC rates and Overhead byte #Z.194.0 can use any of the Ethernet Subchannel in the negotiation process.
 - **HDLC**: Only overhead byte #Z.66.0 is used with the configured HDLC Rate during the negotiation process. Ethernet #Z.194.0 byte is set to rr00 0000 as it is disabled.
 - **Ethernet**: Only overhead byte #Z.194.0 is used with the configured Ethernet Subchannel during the negotiation process. HDLC #Z.66.0 byte is set to rrrr r000 as it is disabled.
 - **Disabled**: Both HDLC Rates and Ethernet Subchannel are disabled to simulate a Passive Link. Ethernet #Z.194.0 byte is set to rr00 0000 and HDLC #Z.66.0 byte is set to rrrr r000. Only available with **Base Station** emulation mode.

C&M table indicates either the received (HDLC or Ethernet) or negotiated (Auto) C&M for Ethernet subchannel and HDLC rates in Mbit/s. A red background indicates either a C&M type mismatch or HDLC Rate/Ethernet subchannel mismatch compared to the generated C&M channel. An arrow is displayed indicating which C&M Channel should normally be selected as per the standard rules.

- **Subchannel** selects the Ethernet Subchannel number: **20** to **63** where 63 is the lowest bit rate and 20 the highest.

Test Setup - Test Configurator, Timer, and System

Interface (Ethernet, Packet Sync, Fibre Channel, and Wireless)

➤ **Rate (Mbit/s)** is available with **HDLC** and **Ethernet C&M Channel**.

For **HDLC**: Allows the selection of the HDLC bit rate. Choices depend on the selected CPRI interface rate. HDLC **Proprietary** is used to exercise a case where the Base Station is aware in advance of the HDLC rate to use. The proprietary rate are not described in the standard. If an HDLC Proprietary is received during the negotiation process while the **C&M Channel** is set to **Auto**, the negotiation completes but no actual bit rate is reported as it is unknown. Similarly, if an equipment vendor uses an invalid rate (as per the CPRI Standard) during the negotiation process, this rate is reported as **Unspecified (Code)** where **Code** is a decimal value representing an invalid rate based on the configured interface rate.

CPRI Rate (Gbit/s)	HDLC Rate (Mbit/s)
1.2	0.240, 0.480, 0.960 (default), Proprietary
2.4	0.240, 0.480, 0.960, 1.920 (default), Proprietary
3.1	0.240, 0.480, 0.960, 1.920, 2.400 (default), Proprietary
4.9	0.240, 0.480, 0.960, 1.920, 2.400, 3.840 (default), Proprietary
6.1	0.240, 0.480, 0.960, 1.920, 2.400, 4.800 (default), Proprietary
9.8	0.240, 0.480, 0.960, 1.920, 2.400, 7.680 (default), Proprietary

For **Ethernet**: Indicates the bit rate corresponding to the selected **Subchannel**.

Test Setup - Test Configurator, Timer, and System

Interface (Ethernet, Packet Sync, Fibre Channel, and Wireless)

WIS Button

Note: *WIS is only available for 10GE WAN interface.*

- **J0 Trace** allows to set the **J0 Trace** value in 16 bytes format (default is **EXFO 10GigE**).
- **J1 Trace** allows to set the **J1 Trace** value in 16 bytes format allowing up to 15 bytes (a CRC-7 byte will be added in front for a total of 16 bytes). Default is **EXFO 10GigE**.

Note: *J0 and J1 values should be 7-bit T.50 suitable characters. The **Padding** drop list from the message keyboard allows to select **Null** or **Space** to fill up the **J0 Trace** and **J1 Trace** up to 15 byte value. The **Control Characters** button in the **J0 Trace** and **J1 Trace** message keyboard, allows to select the required character. For more details on **Control Characters**, see page 36.*

- **Path Signal Label (C2)** byte is allocated to indicate the content of the STS SPE, including the status of the mapped payload.

C2 (Hex.)	Description
00	Unequipped
01	Equipped - Non-Specific
1A ^a	10 Gbit/s Ethernet (IEEE 802.3)
FE	Test Signal, ITU-T 0.181

a. Default value.

Physical Interface

For parallel interface, the following information is displayed for each optical lane.

- **Optical Lane** indicates the optical lane number.

Optical Interface	Optical Lane Number
40GE (4 Lanes) [41.25 Gbit/s] 100GE (4 Lanes) [103.125 Gbit/s]	0 through 3

- **Laser** indicates the status of the laser: **ON** with the laser pictogram (emitting an optical laser signal) or **OFF**.
- **TX Power (dBm)** indicates, when supported, the transmit power level of the optical lane/laser in dBm.
- **Wavelength (nm)** indicates the detected wavelength when supported by the transceiver.
- **RX Power (dBm)** indicates, when supported, the current received power level of the optical laser/lane in dBm.

Green: Power level in range.

Yellow: Power level out-of-range.

Red: Loss of signal or power level is close to damage.

Gray: Invalid operational range value.

- **Min RX Power (dBm)** indicates, when supported, the minimum received power level of the optical laser/lane in dBm.
- **Max RX Power (dBm)** indicates, when supported, the maximum received power level of the optical laser/lane in dBm.
- **Laser ON/OFF** button, available with parallel interface, is used to activate the laser control per optical lane or for all lanes.

Optical lane numbers are from **0** to **3**.

Test Setup - Test Configurator, Timer, and System

Interface (Ethernet, Packet Sync, Fibre Channel, and Wireless)

- **All Lanes** check box, when selected, applies the change(s) to all optical lanes at once.
- **Optical Lane** indicates the optical lane numbers and **All** which represents the setting for all optical lanes when the **All Lanes** check box is selected.
- **Laser** check box, when selected, indicates that the corresponding optical laser lane is activated and emitting an optical laser signal.
- **Lasers OFF at Start-Up** check box when selected automatically turns OFF the laser for serial interfaces or all lasers for parallel interfaces when starting the NetBlazer V2 Series or when switching from one test application to another; this applies on both ports for **Dual Port** topology. However the laser remains ON, on a remote module receiving a request for a DTS connection or a loopback command. This check box is cleared by default.
- **Power Range (dBm)** indicates the transceiver operational RX power range.

TX Frequency

Note: The following TX Frequency information applies to serial interface only, refer to TX Frequency on page 153 for parallel interface. Not available when using an active copper SFP.

- **TX Frequency (GHz)** indicates the frequency (actual frequency + Frequency offset) used for transmission.

Note: Frequency offset is not available with OBSAI, CPRI in RRH emulation mode, or RFC 6349 test application.

- **Offset (ppm)** check box, when selected (cleared by default), allows to set the frequency offset that will be generated: ± 120 ppm. Use the “+” or “-” button to respectively increment or decrement the frequency offset value based on the defined **Increment/Decrement Size**, or directly type the frequency offset value in the field.
- **Step Size (ppm)** allows to set the increment/decrement value (from 0.1 to the maximum offset) that will be used when changing the frequency offset with the “+” or “-” button.

RX Frequency

Note: The following RX Frequency information applies to serial interface only, refer to RX Frequency on page 154 for parallel interface. Not available when using an active copper SFP.

- **Frequency (GHz)** indicates the frequency of the input signal.
- **Offset (ppm)** indicates the frequency offset between the standard rate specification and the rate at the input signal.

Note: For both **Frequency** and **Offset** the following background colors are used.

Background color	Description
Green	The frequency is in range.
Red	The frequency is out-of-range. LOC is also displayed.
Gray	Pending state.

➤ **Max Offset (ppm)**

Negative indicates the maximum negative frequency offset between the standard rate specification and the rate from the received signal.

Positive indicates the maximum positive frequency offset between the standard rate specification and the rate from the received signal.

ISDN PRI - Call Management

From the **Test** menu, tap **Setup, Test Configurator**, the test block, and the **Call Management** tab.

Call Origination Settings

➤ Channel Identification

- The channel buttons allow the selection of a channel for call origination configuration. The selected channel has its button highlighted with a blue border. **D-Ch** indicates the channel configured as D-Channel and is not selectable.

A warning icon is displayed on each channel button for which either the originator and/or destination number is not defined.

- **Call All at Start** check box when selected, initiates calls for all configured channels when the test is started.
- **Calling Party** and **Called Party** defines respectively the originator and destination call information.
- **Numbering Plan** choices are **Unknown**, **ISDN/Telephony** (default), or **Private**.
- **Numbering Type** choices depend on the **Numbering Plan** and **DS1/E1 Switch Type** selected.

Test Setup - Test Configurator, Timer, and System

ISDN PRI - Call Management

Interface/ Rate	Switch Type	Numbering Types for ... Numbering Plan		
		Unknown	ISDN Telephony	Private
DS1	National ISDN	Unknown	International, National, Local	Subscriber
	Nortel DMS-100/250 and AT&T 4ESS/5ESS	Unknown	International, National, Subscriber	Subscriber
E1	Euro VN6 and Euro ISDN	Unknown	Unknown, International, National, Subscriber	Unknown, Network Specific, Subscriber
	Euro Q.SIG	Unknown	Unknown, International, National, Subscriber	Unknown, Level 2 Regional, Level 1 Regional, PISN Specific, Level 0 Regional

- **Number** allows to enter respectively the originator and destination numbers. A maximum of 30 digits is permitted.

If the originator and/or destination number field is empty for any channel, a warning icon with the following message is displayed at the bottom of the pop-up:

Call origination settings incomplete. Missing Calling or Called Party Number.

- **Call at Start** check box when selected, initiates calls for the selected channel when the test is started. Alternatively the **Call All at Start** check box can be used to initiates calls for all configured channels when the test is started.

- **Call**
 - **Type** selects the service type: **3.1 kHz**, **Speech** (default), or **Data**.
 - **Rate** is only configurable for **Data** type: **56K** or **64K** (default). The rate is set **64K** for **3.1 kHz** and **Speech** types as well as for **Euro Q.SIG** switch type.
- **Network**
 - **Transit Net Code** (Transit Network Code) selects a specific network on which the call is placed and is only applicable in **TE - Emulation Mode**. The range is from **0** to **9999**. By default this field is blank meaning that no Transit Network Selection code is transmitted. Not supported with **Euro Q.SIG** switch type.
 - **Operator Sys Access** (Operator System Access) determines whether or not an operator is used: **Disabled** (default), **Principal**, and **Alternate**. Only applies to **National ISDN** switch type, **Speech** and **3.1 kHz** call type, and in **TE - Emulation Mode**.

Answer Mode

Allows the selection of the call answering mode.

- **Auto-Answer** (default) answers all incoming calls automatically.
- **Auto-Reject** rejects all incoming calls automatically.
- **Prompt**: asks to answer or reject a call. A call answered or rejected is removed from the table in the **Answer Prompt** window. All incoming calls are listed in the received order.

Calls can be answered or rejected individually (**Answer/Reject**) or collectively (**Answer All/Reject All**).

The **Close** button is available once all calls are answered or rejected.

Call Establishment/Termination Pass/Fail Verdict

- **Call Establishment/Termination Pass/Fail Verdict** check box when selected (cleared by default) enables call establishment and termination pass/fail verdict for each channel and globally for the test. No verdict is provided on the D-Channel.

A pass verdict indicates that there was no call processing error during call establishment or call termination.

A fail verdict indicates that one of the following events occurs.

- **Call Establishment:** An incoming or outgoing call is unexpectedly cleared before it reaches the connected state at the exception of rejected incoming calls.
- **Call Termination:** A connected call is unexpectedly cleared.

The global pass/fail verdict is reported as fail when any channel has a fail verdict or when a LOS, LOF, or AIS error occurs.

Call Control

The channel buttons allow the selection of a channel to see its information or to initiate/terminate calls. The selected channel has its button highlighted with a blue border. Each channel button presents the following information.

Information (location on the button)	Description
Channel number (Top-left corner)	Indicates the channel's number. There are 24 channels for DS1 and 31 for E1.
Pattern sync. (Top-right corner)	Available with data call. The pattern sync icon indicates if the data call pattern is properly synchronized (green icon) or not (red icon).
Call State or D-Channel (Bottom-centered)	Indicates either the call state or D-Ch for the channel configured as D-Channel.

Call/Hang-Up and **Hang-Up All** buttons are available depending on the status of the call.

- **Call** initiates a call on the selected channel.
- **Hang-Up** terminates a call on the selected channel.
- **Hang-Up All** terminates all calls.

The information for the selected channel is displayed at the right of the channel's buttons. See *Call Origination Settings* on page 169 for more information.

Phone Book Name indicates the name associated to the call number when present in the phone book (refer to *Phone Book Button* on page 584).

The following message is displayed when either the originator and/or destination number field is empty for the selected channel:

Call origination settings incomplete. Missing Calling or Called Party Number.

ISDN PRI - ISDN Settings

From the **Test** menu, tap **Setup**, **Test Configurator**, the test block, and the **ISDN Settings** tab.

D-Channel

- **Channel** indicates the channel selected to establish the ISDN signalling path. The default D-Channel for DS1 is **24** and for E1 is **16**.
- **Rate** represents the rate at which data is exchanged. Depending on the network, the options available are **56K** and **64K** (default).
- **HDLC Mode** represents the bit inversion of the signal: **Normal** (default) or **Inverted**.
- **D-Channel** indicates the status of the D-Channel. A green arrow pointing up indicates that the link is up (**L2 - Multiple frame established**) and a red arrow pointing down indicates that the link is down.

B-Channel

Note: *The following B-Channel settings apply to all data calls.*

- **Data Call Pattern** allows to select the pattern: **PRBS9**, **PRBS11** (default), **PRBS20**, **1111**, **1100**, **1010**, **0000**, **1in8**, **1in16**, **2in8**, and **3in24**.
- **Invert** check box when selected (cleared by default) inverts the test pattern meaning that every 0 will be changed for 1 and every 1 for 0. For example, the pattern 1100 will be sent as 0011.
- **RX Pattern Analysis** check box when selected enables the monitoring of the test pattern for all data calls.
- **BER Pass/Fail Verdict** allows to enable bit error pass/fail verdict by selecting either **Bit Error Count** or **Bit Error Rate** (default) or **Disabled**.

- **Threshold** allows to enter the threshold value that will be used to declare the pass/fail verdict.

For **Count**, enter the maximum bit error count allowed before declaring a fail verdict: **0** (default) to **999999**.

For **Rate**, enter the maximum bit error rate allowed before declaring a fail verdict: **1.0E-14** to **1.9E-01** (default is **1.0E-12**).

- **Idle Code** allows the generation of idle code when a B-Channel is in idle state or active with a Speech or 3.1 kHz call without the headset connected. Choices are **00** to **FF** (default is **7F**). Idle code is not present on a channel connected to the headset.
- **Binary** check box when selected allows to enter Idle Code in Binary format else it is in Hex format.

Restore ISDN PRI Defaults

Reverts the current test application to its default factory settings.

Labels

From the **Test** menu, tap **Setup, Test Configurator**, the interface block, and on the **Labels** tab.

Note: *Selecting a Label byte to be generated will automatically update the corresponding OH byte. Refer to OH - SONET/SDH on page 529 for more information.*

Labels

- **STS/AU Path (C2):** The C2 byte is allocated to indicate the content of the STS SPE / VC, including the status of the mapped payloads.

Generated: Select the C2 byte from the list. Selecting a C2 byte value will automatically update the OH C2 selection and vice versa. Refer to C2 on page 537 for more information.

- **PLM-P/UNEQ-P / HP-PLM/HP-UNEQ:** Enables the Payload Mismatch and STS/AU UNEQ monitoring. This setting is coupled with the configuration of *Traces - SONET/SDH* on page 476.

Expected: Select the expected C2 byte from the list. Refer to C2 on page 537 for more information.

- **VT/TU Path (V5):** The V5 byte is allocated to indicate the content of the VT/TU path, including the status of the mapped payloads.

- **Generated:** Select the V5 byte from the list. Selecting a V5 byte value will automatically update the OH V5 selection and vice versa. Refer to V5 on page 540 for more information.

- **PLM-V/UNEQ-V / LP-PLM/LP-UNEQ:** Enables the Payload Mismatch and VT/TU UNEQ monitoring. This setting is coupled with the configuration on the *Labels* on page 379.

- **Expected:** Select the expected V5 byte from the list. Refer to V5 on page 540 for more information.

Link OAM

From the test menu, tap **Setup, Test Configurator**, and the **Link-OAM (802.3)** test block.

OAM Mode

Allows the selection of the OAM mode:

- **Active** (default) initiates the OAM discovery and send OAMPDU loopback control; doesn't respond to variable request nor generate Link Event Notification.
- **Passive** doesn't initiate OAM discovery nor send OAMPDU loopback control.

OAMPDU Destination MAC Address

Indicates and allows to change the default multicast OAM PDU destination MAC address: **01:80:C2:00:00:02**.

Default check box when cleared (default is selected), allows the configuration of the OAM PDU destination MAC address:

00:00:00:00:00:00 to **FF:FF:FF:FF:FF:FF**.

Pass/Fail Verdict

Pass/Fail Verdict check box when selected (default) enables the use of the pass/fail verdict. A global fail verdict is declared when any of the following condition is met: **Link Down**, any Link OAM alarm, **Remote Alarms** (if enabled), or **Remote Loopback** (if enabled).

- **Remote Alarms** check box when selected (default) considers the following alarms to declare the pass/fail verdict: **Critical Event**, **Dying Gasp**, and **Link Fault**.
- **Remote Loopback** check box when selected (default) considers successful/unsuccessful remote loopback request to declare the pass/fail verdict.

OAM Discovery Status

- **Local** reports the local OAM discovery status as follows:

Status	Description
Evaluating	OAM discovery is started.
Stable	OAM discovery is completed. Local OAM is satisfied with the remote OAM settings.
Unsatisfied	OAM discovery cannot complete successfully. Local OAM equipment is unsatisfied with the remote OAM settings.

- **Remote** reports the remote OAM discovery status as follows:

Status	Description
Evaluating	OAM discovery is started.
Stable	OAM discovery is completed. Remote OAM is satisfied with the local OAM settings.
Unsatisfied	OAM discovery cannot complete successfully. Remote OAM equipment is unsatisfied with the local OAM settings.

Loopback

- **Local and Remote**
 - **Status** indicates the status of the local and remote loopback: **Enabled** represents a Looped-Up condition and **Disabled** a Looped-Down condition.
 - **Enable/Disable** button allows to respectively Loop-Up (**Enable**) or Loop-Down (**Disable**).

Local Details (iSAM)

From the **Test** menu, tap **Setup**, **Test Configurator**, and the **More** button from the **Local** block.

LINK

- An arrow is used to indicate the status of the test link (at the PCS level for parallel interfaces).
 - A green arrow indicates that the link is up.
 - A red arrow indicates that the link is down.
 - A gray arrow indicates awaiting incoming data to provide a status.
- **Interface/Rate** or **Port** choices depend on the rates available on the module.

Interface/Rate
100GE (4 Lanes) [103.125 Gbit/s]
40GE (4 Lanes) [41.25 Gbit/s]
10GE WAN
10GE LAN
1GE Optical
100M Optical
10/100/1000M Electrical ^a

- a. For 890 and 890NGE (100G), Ethernet 10/100/1000M electrical is possible when using an active copper SFP.

For 10GE WAN, the test uses the WIS default values for J0, J1, and C2 as defined in *WIS Button* on page 164.

- SR4 check box when selected (cleared by default) defines the PHY type as SR4 enabling RS-FEC which is required when using a 100GBASE-SR4 transceiver. Ensure both ends of the circuit have the FEC enabled. Only available on 890 and 890NGE (100G).

Test Setup - Test Configurator, Timer, and System

Local Details (iSAM)

- **Connector** allows the selection of the module's port.

Interface/Rate	Connector ^a	
	720Gv2/730Gv2 870v2/870Q 880v2/880Q 890NGE (10G)	890 890NGE (100G)
100GE (4 Lanes) [103.125 Gbit/s]	-	Port 1 - CFP4 Port 2 - QSFP
40GE (4 Lanes) [41.25 Gbit/s]	-	Port 2 - QSFP
10GE WAN 10GE LAN 1GE Optical 100M Optical	Port 1 - SFP+ Port 2 - SFP+	Port 1 - SFP+
10/100/1000M Electrical	Port 1 - RJ45	Port 1 - SFP+ (RJ45) ^b

- a. Availability of connectors depend on the model.
b. Ethernet 10/100/1000M electrical is supported when using an active copper SFP.

- **Auto-Negotiation** check box when selected (default), indicates to the remote port which parameters to use. Only available with **10/100/1000M Electrical** and **1GE Optical** interfaces. For 1GE Electrical interface, the **Auto-Negotiation** check box is automatically selected and is not configurable.

Note: When the **Auto-Negotiation** check box is selected, the port **Speed** can be set. This setting is not applied immediately to the port, it is used only when the negotiation process is started, and takes effect only when the auto-negotiation succeeds. However, the current setting is applied immediately to the port when the Auto-Negotiation check box is cleared.

- **Speed**, available with **10/100/1000M Electrical** interface, allows the selection of the interface rate: **10M**, **100M**, **1GE**, or **Auto**; **Auto** is only available when the Auto-Negotiation check box is selected. The negotiated speed will be displayed next to the Speed field selection.

Note: *Full Duplex is used and there is no **Flow Control** (pause frames received are ignored).*

- **Lasers OFF at Start-Up** allows to automatically turn off all lasers when starting the module or when switching from one test application of the same group (Ethernet or Transport) to another. This check box is cleared by default.

MAC

- **Address** indicates the default and unique Media Access Control (MAC) address given to the Ethernet port.
- **VLAN ID/Priority** check box when selected, cleared by default, enables C-VLAN with VLAN Ethernet type of 8100 and allows to set both VLAN ID and priority.

VLAN ID choices are **0** through **4095**; default is **2**; refer to *VLAN ID and Priority* on page 679 for more information.

Priority choices are **0** (default) to **7**. Refer to *VLAN ID and Priority* on page 679 for more information.

IP

- **IP Version** is set to **IPv4**.
- **Automatic IP (DHCP)** check box, when selected (cleared by default), allows to dynamically obtain an IP address from a DHCP (Dynamic Host Configuration Protocol) server.

Note: *IP Address, Subnet Mask, and Default Gateway are not available when the Automatic IP (DHCP) check box is selected.*

- **IP Address** allows to enter the source IP address for the stream. The default setting is 10.10.x.y, where x and y are respectively the two least significant bytes of the port default MAC address.
- **Subnet Mask** allows to enter the Subnet Mask for the stream. The default setting is **255.255.0.0**.
- **Default Gateway** check box, when selected (cleared by default), allows to enter a default Gateway IP address. When the **Default Gateway** check box is selected, its default address is **0.0.0.0**.

Remote Discovery ID

Remote Discovery ID is used to easily identify this module in case another module is performing a discovery scan. Up to 16 alpha-numeric characters are allowed.

MAC/IP/UDP

Note: *Only available with Framed Layer 2 (see **Framing** from the Modify Frame Structure). For Traffic Gen & Mon all parameters are configurable per stream. For EtherSAM all parameters are configured per service.*

From the **Test** menu, tap **Setup, Test Configurator**, and...

- For **RFC 2544** and **EtherBERT**, tap on the protocol block.
- For **EtherSAM**, and **Traffic Gen & Mon**, tap on the protocol block, and on the **MAC/IP/UDP** tab.

Stream Selection (Traffic Gen & Mon)

The Traffic Gen & Mon test application supports the configuration of up to 16 different streams. Select the stream to be configured by either using the left/right arrow or by tapping over the stream numbers area then tapping on a specific stream number.

Service Selection (EtherSAM)

The EtherSAM test application supports the configuration of up to 10 different services. Select the service to be configured by either using the left/right arrow or by tapping over the service numbers area then tapping on a specific service number.

Couple with Interface

The **Frame Format**, **Network Layer**, and all **IP** and **VLAN** settings are coupled with the interface (see *Network* on page 198) when the **Couple with Interface** check box is selected (default). The **Source MAC Address** is always coupled. Not available when using **Provider Encapsulation**.

Modify Frame Structure

Allows to modify the structure of the frame.

► Global Option

- **S-OAM** check box when selected, enables EtherSAM over service OAM at Layer 2 on all services. The EtherSAM uses LBM and LBR messages of the S-OAM protocol to perform the test. A device having the capability to loopback LBM messages (via LBR) is required at the remote. Only available with EtherSAM for rates up to 10G WAN. Not available in Dual Test Set and Dual Port topology.
- **Provider Encapsulation** is available with single port EtherBERT Framed Layer 2 and Traffic Gen & Mon test applications at rates of 10GE, 40GE, and 100GE. Choices are:

None: No encapsulation.

EoE: Ethernet over Ethernet encapsulation.

Destination EoE MAC Address	Source EoE MAC Address	EoE VLAN 0xA100 (4 bytes)	EoE TPID (EtherType) 0xE0E0 (2 bytes)	TTL (1 byte)	ETag (1 byte)	Customer Frame starting with Destination Address without FCS	FCS (4 bytes)
-----------------------------------	------------------------------	---------------------------------	--	-----------------	------------------	---	------------------

PBB-TE: Provider Backbone Bridges with Traffic Engineering encapsulation.

Backbone Destination MAC Address (6 bytes)	Backbone Source MAC Address (6 bytes)	B-VLAN 0x88A8 (4 bytes)	EtherType 0x88E7 (2 bytes)	I-TAG (4 bytes)	Customer Frame starting with Destination Address without FCS	FCS (4 bytes)
---	--	-------------------------------	----------------------------------	--------------------	---	------------------

- **IP Version** allows to select **IPv4** (default) or **IPv6** that will be used for both the interface and all streams/services.
- **Framing**
 - **Frame Format** (layer 2) allows to select **Ethernet II** (default) or **802.3 SNAP** as the frame format.

- **Network Layer**¹ (layer 3) sets the network traffic type: **IPv4** (default)/**IPv6**, or **None**.
- **Transport Layer**¹ is disabled when the **Network Layer** is **None**.

Test Application	Transport Layer
EtherSAM	None, UDP (default), TCP ^a
RFC 2544	UDP
EtherBERT	UDP (default), TCP ^a
Traffic Gen & Mon	None, UDP (default), TCP ^a

a. Only available for 10M to 10G.

- **MPLS**: The **MPLS Label** check box, when selected (cleared by default), enables 1 or 2 MPLS labels allowing management and test frames to be transmitted and received. Only available with EtherSAM and Traffic Gen & Mon test applications. Not available when using **Provider Encapsulation**. Not available with EtherSAM when the **S-OAM** check box is selected.
- **VLAN**: The **VLAN Tag** check box when selected (cleared by default), enables up to 3 stacked VLAN; up to 2 staked VLAN when using **Provider Encapsulation**.
- **EoE**: The **EoE VLAN** check box, when selected (cleared by default), enables the EoE VLAN tag. Available when EoE is selected as **Provider Encapsulation**.
- **PBB-TE**: The **B-VLAN** check box, when selected (cleared by default), enables the B-VLAN tag. Available when PBB-TE is selected as **Provider Encapsulation**.

See *VLAN* on page 189 for additional VLAN settings.

1. Not available with EtherSAM when the **S-OAM** check box selected. Not available when using Provider Encapsulation.

Preamble/SFD

Indicates that the frame structure contains the Preamble and SFD.

EoE

Note: Available when EoE is selected as the Provider Encapsulation (see Modify Frame Structure on page 184).

- **Source EoE MAC Address** indicates and allows to change (when the **Factory Default** check box is cleared) the default EoE Media Access Control (MAC) address: The default setting is **0E:01:00:xx:xx:xx..**
- **Destination EoE MAC Address** allows to enter the destination EoE MAC address for the stream. The default setting is **0E:01:00:00:00:01**.
- **EoE VLAN**

Note: Only available when the EoE VLAN is enabled; refer to Modify Frame Structure on page 184.

- **VLAN ID** choices are **0** to **4095** (default is 2); refer to *VLAN ID and Priority* on page 679 for more information.
- **Priority**, VLAN user priority, choices are **0** (default) to **7**. Refer to *VLAN ID and Priority* on page 679 for more information.
- **Type**, VLAN Ethernet Type, choices are **0x8100**, **0x88A8**, **0x9100**, **0xA100** (default), **0x9200**, and **0x9300**.
- **Drop Eligible**:, when set to **Yes** (DEI = 1), the transmitted frames will be dropped first on receipt when congestion occurs under test. Drop Eligible is not available when VLAN type is 0x8100. This parameter is set to **No** by default.
- **TTL** (Time To Live) choices are **0** to **255** (default is **64**).
- **ETag** (Extended Tag) choices are **0** to **255** (default is **1**).

PBB-TE

Note: Available when PBB-TE is selected as the Provider Encapsulation (see Modify Frame Structure on page 184).

- **Source B-MAC Address** indicates and allows to change (when the **Factory Default** check box is cleared) the default source Backbone MAC address: **00:03:01:xx:xx:xx**.
- **Destination B-MAC Address** allows to enter the destination Backbone MAC address. The default setting is **00:00:00:00:00:00**.
- **B-VLAN** (EtherType: 0x88A8) is available when PBB-TE VLAN check box is selected (see Modify Frame Structure on page 184).
 - **VLAN ID** choices are **0** through **4095** (default is **2**). Refer to *VLAN ID and Priority* on page 679 for more information.
 - **Priority** choices are **0** (default) to **7**. Refer to *VLAN ID and Priority* on page 679 for more information.
 - **Drop Eligible:**, when set to **Yes** (DEI = 1), the transmitted frames will be dropped first on receipt when congestion occurs under test. This parameter is set to **No** by default.
- **I-TAG** (EtherType: 0x88E7)
 - **SID** (Service Instance Identifier) choices are **0** through **16777215** (default is **256**).
 - **Priority**, the Priority Code Point (PCP), choices are **0** (default) to **7**. Refer to *VLAN ID and Priority* on page 679 for more information.
 - **Drop Eligible:**, when set to **Yes** (DEI = 1), the transmitted frames will be dropped first on receipt when congestion occurs under test. This parameter is set to **No** by default.

MAC

- **Source MAC Address** indicates the default and unique Media Access Control (MAC) address given to the Ethernet port; editable when using **Provider Encapsulation**.
- **Destination MAC Address:** Enter the destination MAC address for the stream. The default setting is the source MAC address. The destination MAC Address field is not accessible when the **Resolve MAC Address** check box is selected.
- **Resolve MAC Address** check box, when selected (default), sends a request to the network to retrieve the MAC address corresponding to the selected destination IP address. This setting is coupled with the **Resolve MAC Address** check box from *IP* on page 191. This check box is not available when the **Network Layer** is set to **None** (refer to *Modify Frame Structure* on page 184).
- **OAM Quick Ping** button automatically starts the quick Ping utility for the stream destination MAC address and provides either a successful or failed result. The quick Ping uses 3 attempts, a delay of 1 second, and a Timeout of 5 seconds.
- **EtherType** is set to the following values by default and is configurable from **0x0000** to **0xFFFF** when the **Network Layer** is set to **None**:
 - 0x0000** when **Network Layer** is set to **None**
 - 0x0800** for IPv4
 - 0x86DD** for IPv6
 - 0x8847** for MPLS
 - 0x88B7** when **Network Layer** is set to **None** with EtherBERT test.
 - 0x8902** for S-OAM (available with EtherSAM)
- **OUI**, available when the frame format **802.3 SNAP** is selected, allows the selection of the Organizationally Unique Identifier (OUI):
 - RFC1042** (0x000000) - (default)
 - User Defined**, available when **Network Layer** is set to **None**, allows to enter the **OUI** value: **0x000000** (default) to **0xFFFFF**.

Note: *Source/Destination Flooding and Flood Range are only available with Traffic Gen & Mon when the Network Layer is set to None (see page 185).*

- **Source Flooding** and **Destination Flooding** check boxes when selected (cleared by default) allows generation of frames using source/destination MAC addresses flooding as follows: The first frame is transmitted starting with the least significant bits of the source/destination MAC address covered by the range set to 0; each subsequent frame is transmitted by incrementing the least significant bits by 1; when the upper limit of the range is reached, the source/destination MAC address restarts over with the least significant bits covered by the range set to 0.
- **Flood Range** is the range of the least significant bits used for the Source Flooding and/or Destination Flooding: **2 (1 bit)**, **4 (2 bits)**, **8 (3 bits)**, **16 (4 bits)**... up to **16777216 (24 bits)** (default).

VLAN

Note: *VLAN is only available when the VLAN Tag is enabled; refer to Modify Frame Structure on page 184.*

For each VLAN tag enabled (C-VLAN/S-VLAN/E-VLAN) the following parameters are configurable.

- **VLAN ID** choices are **0** through **4095**; refer to *VLAN ID and Priority* on page 679 for more information.
- **Priority**, VLAN user priority, choices are **0** (default) to **7**. Refer to *VLAN ID and Priority* on page 679 for more information.
- **Type**, VLAN Ethernet Type, choices are **8100** (default for C-VLAN), **88A8** (default for S-VLAN), **9100** (default for E-VLAN), **9200**, and **9300**.
- **Drop Eligible**:, when set to **Yes** (DEI = 1), the transmitted frames will be dropped first on receipt when congestion occurs under test. Drop Eligible is not available when VLAN type is 8100. This parameter is set to **No** by default.

MPLS

Note: *MPLS is only available when the MPLS Label is enabled; refer to Modify Frame Structure on page 184.*

- **Label** allows the selection of the MPLS TX labels: **0** to **1048575** (default is **16**). Refer to for the list of MPLS labels.
- **COS** allows the selection of the Class Of Service.
 - 0 (000 - Low)** (default)
 - 1 (001 - Low)**
 - 2 (010 - Low)**
 - 3 (011 - Low)**
 - 4 (100 - High)**
 - 5 (101 - High)**
 - 6 (110 - High)**
 - 7 (111 - High)**
- **TTL** allows the selection of the **Time to Live** value: **0** to **255** (default is **128**).

S-OAM

Note: *S-OAM is only available with EtherSAM when the **S-OAM** check box is selected; refer to Modify Frame Structure on page 184.*

MEG/MD Level allows the selection of the Maintenance Entity Group Level / Maintenance Domain Level: **0** to **7** (default).

IP

For **IPv4** the following configuration parameters are available.

- **Automatic IP (DHCP)** check box, when selected (cleared by default), allows to dynamically obtain an IP address from a DHCP (Dynamic Host Configuration Protocol) server.
- **Source IP Address** allows to enter the source IP address for the stream. The default setting is 10.10.x.y, where x and y are respectively the two least significant bytes of the port default MAC address. Not available when the **Automatic IP (DHCP)** check box is selected.
- **Destination IP Address** allows to enter the destination IP address for the stream. The default setting is the source IP address.

For **IPv6** the following configuration parameters are displayed: **Source Link-Local IPv6 Address**, and **Source Global IPv6 Address**. Tap on the **IPv6 Config** button to access all settings.

- **Link-Local IPv6 Address** (LLA) is used for local communication between on-link neighbors and for Neighbor Discovery process.
 - **Mode**

Stateless Auto (default) allows automatic generation of the IPv6 address based on the MAC address.

Static allows to enter the IP Address.
 - **Address**, available with **Static** mode, allows to select the Link-Local IPv6 Address. The accepted range is from **FE80:0000:0000:0000:0000:0000:0000** to **FE80:0000:0000:0000:FFFF:FFFF:FFFF:FFFF**. The default address is **FE80::[Interface ID]**, where **[Interface ID]** is generated from the source MAC address. When the **Address** field is selected for editing using virtual keyboard, the **Previous IPs** button appears allowing to select a previously configured IP address.

- **Global IPv6 Address** (GUA) is used to communicate with on-link neighbors and for global communication with hosts outside the subnet.
- **Mode**
 - None** disables the **Global IPv6 Address** and the **Default Gateway Address**.
 - Stateless Auto** (default) allows automatic generation of the IPv6 address based on the Link-Local address interface ID and the prefix obtained from the router advertisements. If no Interface ID has been obtained for the **Link Local Address**, the global address will not be generated.
 - Static** allows to enter the IP address.
- **Address**, available with **Static** mode, allows to select the **Global IPv6 Address**. The accepted range is from **0000:0000:0000:0000::[Interface ID]** to **FFFF:FFFF:FFFF:FFFF::[Interface ID]**. The default address is **2001:0000:0000:0000::[Interface ID]**, where **[Interface ID]** is generated from the source MAC address. When the **Address** field is selected for editing using virtual keyboard, the **Previous IPs** button appears allowing to select a previously configured IP address.
- **Interface ID Coupled**, available when the **Source Global IPv6 Address** mode is **Static**, allows to couple the interface ID of the Global address to the Link-Local source address.
 - Enabled** (default): Only the 64 bit (MSB) prefix ID in the IPv6 address is configurable, and the 64 bit (LSB) Interface ID is not configurable (read-only).
 - Disabled**: The 64 bit (MSB) Prefix ID and 64 bit (LSB) Interface ID in the IPv6 address are configurable.

- **Prefix Mask**, available with **Static** mode, allows to specify a prefix that defines the subnet. The accepted range is **0000:0000:0000:0000:0000:0000:0000** to **FFFF:FFFF:FFFF:FFFF:0000:0000:0000:0000**. For example:

Global Address: 2001:0DB8:0001:0002:02AA:00FF:FE11:1111
Prefix Mask: FFFF:FFFF:FFFF:0000:0000:0000:0000:0000
Corresponding Prefix: 2001:0DB8:0001.
- **Default Gateway** allows the configuration of the default gateway address to forward packets outside the subnet.
- **Mode**

Automatic (default) allows automatic selection of the default gateway.

Static allows entering the default gateway IP address.
- **Address**, available with **Static** mode, allows to enter the IP address of the Default Gateway. The accepted range is from **0000:0000:0000:0000:0000:0000:0000** to **FE80:0000:0000:0000:FFFF:FFFF:FFFF:FFFF**. The default address is **FE80:0000:0000:0000:0000:0000:0000**.
- **IPv6 Destination Address** allows to select the destination IP address for the stream that must start with **FE80**. The accepted range is from **0000:0000:0000:0000:0000:0000:0000:0001** to **FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF**. The default address is **2001::**. When the **Address** field is selected for editing using virtual keyboard, the **Previous IPs** button appears allowing to select a previously configured IP address.

The following configuration parameters are available for both **IPv4** and **IPv6** unless otherwise specified.

- **Quick Ping** button automatically starts the quick Ping utility for the stream destination IP address and provides either a successful or failed result. The quick Ping uses 3 attempts, a Delay of 1 second, a Timeout of 2 seconds, and a Data Size of 32 Bytes. Refer to *Ping & Trace Route* on page 543 for more options.
- **Resolve MAC Address** check box, when selected (default), sends a request to the network to retrieve the MAC address corresponding to the selected destination IP address. This setting is coupled with the Resolve MAC Address check box from *MAC* on page 188. The Resolve MAC address status is displayed. Possible status are:

Status	Description
--	The Resolve MAC address is not enabled.
Resolving	The MAC address is being resolved.
Resolved	The MAC address is resolved.
Failed	The MAC address cannot be resolved.

- **Source IP Multiplier** check box, when selected (cleared by default), allows changing the 7 LSB (Least Significant bit) of the source IP address as specified in the range: **1-128** (default) or **0-127**.
- **Subnet Mask** (IPv4) allows to enter the Subnet Mask for the stream. The default setting is **255.255.0.0**. Not available when the **Automatic IP (DHCP)** check box is selected.
- **Default Gateway** (IPv4) check box, when selected (cleared by default), allows to enter a default Gateway IP address. When the **Default Gateway** check box is selected, its default address is **0.0.0.0**. The **Default Gateway** address is not configurable when the **Automatic IP (DHCP)** check box is selected.

- **TTL (IPv4) or HOP Limit TTL (IPv6)** sets the Time To Live value: **1** to **255** (default is **128**).
- **Flow Label (IPv6)** is a number used to identify a series of related packets from a source to a destination: **0** (default) to **1048575**.
- **IP TOS/DS (IPv4) or Traffic Class (TOS/DS) - (IPv6)** allows to enter either an hexadecimal value, **00** (default) to **FF**, or tap on the **TOS/DS Config** button to set each TOS or DS parameter individually. Changing the **IP TOS/DS** value will affect the **TOS/DS Config** settings and vice versa.
- **TOS/DS Config** button allows to set the Type of Service or the Differentiated Service parameters.

TOS/DS

- **TOS/DS** allows to select either Type Of Service (TOS) or Differentiated Services (DS).
- **Binary/Hex** allows to display, once this pop-up is closed, the IP TOS/DOS value either in binary or hexadecimal.

Type Of Service (available when **TOS** is selected).

- **Precedence** value:
 - 000 (Routine)** (Default)
 - 001 (Priority)**
 - 010 (Immediate)**
 - 011 (Flash)**
 - 100 (Flash Override)**
 - 101 (CRITIC/ECP)**
 - 110 (Internet Control)**
 - 111 (Network Control)**
- **Delay** allows the selection of the delay level: **Normal** (default) or **Low**.
- **Throughput** allows the selection of the throughput level: **Normal** (default) or **High**.

- **Reliability** allows the selection of the reliability level: **Normal** (default) or **High**.
- **Monetary Cost** allows the selection of the monetary cost level: **Normal** (default) or **Low**.
- **Reserved Bit** allows the selection of the reserved bit value: **0** (default) or **1**.

Differentiated Services (available when **DS** is selected).

- **DSCP Codepoints**:
000000 (CS0) (default), **001000** (CS1), **010000** (CS2),
011000 (CS3), **100000** (CS4), **101000** (CS5), **110000** (CS6),
111000 (CS7), **001010** (AF11), **001100** (AF12), **001110** (AF13),
010010 (AF21), **010100** (AF22), **010110** (AF23), **011010** (AF31),
011100 (AF32), **011110** (AF33), **100010** (AF41), **100100** (AF42),
100110 (AF43), **101110** (EF), **110011** (51), **110110** (54), or
User Defined.
- **User Defined Codes**, available when **User Defined** has been selected from the **DSCP codepoints**, allows to enter a user defined code from hexadecimal **00** (default) to **3F** once the **TOS/DS Config** pop-up is closed.
- **ECN** allows the selection of the Explicit Congestion Notification code: **00** (Not-ECT) (default), **01** (ECT-1), **10** (ECT 0), or **11** (CE).

UDP

Allows the selection of the source and destination UDP port number.

- **Source Port** is configurable from **0** to **65535**; the default is **49184**.
- **Destination Port** is configurable from **0** to **65535**; the default is **7 (echo)**.

TCP

Allows the selection of the source and destination TCP port number.

- **Source Port** is configurable from **0** to **65535**; the default is **49184**.
- **Destination Port** is configurable from **0** to **65535**; the default is **7 (echo)**.

Payload

For RFC 2544 and EtherBERT, indicates that the frame structure contains a Payload.

For Traffic Gen & Mon, allows the selection of both user defined header and pattern. Payload is not configurable when the **QoS Metrics Tags Insertion** check box is selected (see the **Global** tab).

- **User Defined Header** check box when selected (cleared by default) allows to define a 16-byte header.
- **Pattern** allows the selection of a pattern: **00** to **FF** (default is **CC**).

FCS

Indicates that the frame structure contains an Ethernet FCS.

Network

From the test menu tap **Setup, Test Configurator**, the interface block, and the **Network** tab.

Note: *For Through Mode test application, the Network tab is only available for the Primary Port but the configured parameters apply to both ports.*

MAC

- **MAC Address** indicates and allows to change, when the **Factory Default** check box is cleared, the default and unique Media Access Control (MAC) address given to the Ethernet port.
- **Factory Default** check box, when selected (default), indicates that the factory source MAC address is used.
- **Frame Format** (layer 2) allows to select **Ethernet II** (default) or **802.3 SNAP** as the frame format.

IP

IP Version allows the selection of either **IPv4** (default) or **IPv6**. Only IPv4 is supported for TCP Throughput and RFC 6349 test applications.

For **IPv4** the following configuration parameters are available.

- **Automatic IP (DHCP)** check box, when selected (cleared by default), allows to dynamically obtain an IP address from a DHCP (Dynamic Host Configuration Protocol) server.
- **IP Address**¹: Enter the IP address of the port. The default setting is 10.10.x.y, where x and y are respectively the two least significant bytes of the port default MAC address.
- **Subnet Mask**¹: Enter the Subnet Mask. The default setting is **255.255.000.000**.
- **Default Gateway**¹ check box, when selected (cleared by default), allows to enter a default Gateway IP address. When the **Default Gateway** check box is selected, its default address is **0.0.0.0**.

1. Not configurable when the **Automatic IP (DHCP)** check box is selected.

For **IPv6** the following configuration parameters are displayed: **Link-Local IPv6 Address**, **Global IPv6 Address**, and **Default Gateway**. Tap on the **Config** button to access all settings.

- **Link-Local IPv6 Address** (LLA) is used for local communication between on-link neighbors and for Neighbor Discovery process.
 - **Mode**
 - Stateless Auto** (default) allows automatic generation of the IPv6 address based on the MAC address.
 - Static** allows to enter the IP Address.
 - **Address**, available with **Static** mode, allows to select the Link-Local IPv6 Address. The accepted range is from **FE80:0000:0000:0000:0000:0000:0000** to **FE80:0000:0000:0000:FFFF:FFFF:FFFF:FFFF**. The default address is **FE80::[Interface ID]**, where **[Interface ID]** is generated from the source MAC address. When the **Address** field is selected for editing using virtual keyboard, the **Previous IPs** button appears allowing to select a previously configured IP address.

- **Global IPv6 Address** (GUA) is used to communicate with on-link neighbors and for global communication with hosts outside the subnet.
- **Mode**
 - None** disables the **Global IPv6 Address** and the **Default Gateway Address**.
 - Stateless Auto** (default) allows automatic generation of the IPv6 address based on the Link-Local address interface ID and the prefix obtained from the router advertisements. If no Interface ID has been obtained for the **Link Local Address**, the global address will not be generated.
 - Static** allows to enter the IP address.
- **Address**, available with **Static** mode, allows to select the **Global IPv6 Address**. The accepted range is from **0000:0000:0000:0000::[Interface ID]** to **FFFF:FFFF:FFFF:FFFF::[Interface ID]**. The default address is **2001:0000:0000:0000::[Interface ID]**, where **[Interface ID]** is generated from the source MAC address. When the **Address** field is selected for editing using virtual keyboard, the **Previous IPs** button appears allowing to select a previously configured IP address.
- **Interface ID Coupled**, available when the **Source Global IPv6 Address** mode is **Static**, allows to couple the interface ID of the Global address to the Link-Local source address.
 - Enabled** (default): Only the 64 bit (MSB) prefix ID in the IPv6 address is configurable, and the 64 bit (LSB) Interface ID is not configurable (read-only).
 - Disabled**: The 64 bit (MSB) Prefix ID and 64 bit (LSB) Interface ID in the IPv6 address are configurable.

- **Prefix Mask**, available with **Static** mode, allows to specify a prefix that defines the subnet. The accepted range is **0000:0000:0000:0000:0000:0000:0000** to **FFFF:FFFF:FFFF:FFFF:0000:0000:0000:0000**. For example:

Global Address: 2001:0DB8:0001:0002:02AA:00FF:FE11:1111
Prefix Mask: FFFF:FFFF:FFFF:0000:0000:0000:0000:0000
Corresponding Prefix: 2001:0DB8:0001.
- **Default Gateway** allows the configuration of the default gateway address to forward packets outside the subnet.
- **Mode**

Automatic (default) allows automatic selection of the default gateway.

Static allows entering the default gateway IP address.
- **Address**, available with **Static** mode, allows to enter the IP address of the Default Gateway. The accepted range is from **0000:0000:0000:0000:0000:0000:0000** to **FE80:0000:0000:0000:FFFF:FFFF:FFFF:FFFF**. The default address is **FE80:0000:0000:0000:0000:0000:0000**.

VLAN

VLAN Tag check box, when selected (cleared by default), enables and allows to set up to 3 stacked VLANs.

For each VLAN tag enabled, C-VLAN / S-VLAN / E-VLAN, the following parameters are configurable.

- **VLAN ID** choices are **0** through **4095**; refer to *VLAN ID and Priority* on page 679 for more information.
- **Priority**, VLAN user priority, choices are **0** (default) to **7**. Refer to *VLAN ID and Priority* on page 679 for more information.
- **Type**, VLAN Ethernet Type, choices are **0x8100** (default for C-VLAN), **0x88A8** (default for S-VLAN), **0x9100** (default for E-VLAN), **0x9200**, and **0x9300**.
- **Drop Eligible**, when set to **Yes** (DEI = 1), the transmitted frames will be dropped first on receipt when congestion occurs under test. Drop Eligible is not available when VLAN type is 8100. This setting is set to **No** by default.

Network Details (iSAM)

Either select the Layer parameter, the number of services, for each service the profile and CIR settings, or click on **More** for all settings. The total bandwidth (when the **Performance Test** is enabled) and the estimated test duration are also displayed.

From the **Test** menu, tap **Setup**, **Test Configurator**, and the **More** button from the **Network** block.

iSAM

- **Layer** is the layer used for all services. The layer is fixed to **L3/L4** when the **RFC 6349 Test** is enabled.
 - **L2** (default) for Ethernet II.
 - **L3/L4** for Ethernet II, IP (IPv4), and respectively UDP for the Configuration and Performance subtests, and TCP for RFC-6349 subtest.
- **Classification** defines the traffic classification used in the provider network: **VLAN ID**, **VLAN Priority**, or **DSCP** (available with layer L3/L4).

Note: *At least one check box (**Configuration Test**, or **Performance Test**, or **RFC 6349 Test**) has to be selected.*

- **Configuration Test** check box when selected (default) verifies if the network configuration is correct for each service before starting a long term test (Performance Test).

Set the **Configuration Test** duration in seconds per step enabled (CIR and CIR+EIR): 5 seconds (default) to 60 seconds.

- **Performance Test** check box when selected (default) verifies that the SLA parameters (FD, IFDV, and FLR) are met over time by running multiple services simultaneously. Results are measured and compared to the configured thresholds to declare the pass/fail verdicts. The **Performance Test** is only performed for services that have their **CIR** check box selected.

Set the **Performance Test** duration in hh:mm format: 1 minute to 24 hours (default is 10 minutes).

- **RFC 6349 Test on Service 1** check box when selected (cleared by default) verifies that the Ethernet service is able to properly carry TCP traffic; **Service 1** is used to performed the RFC 6349 test. Enabling the **RFC 6349 Test on Service 1** automatically set the operation mode to DTS and the layer to **L3/L4**; direction is bidirectional, max MTU is 1500 bytes, multiple connections as well as Path MTU Discovery are enabled.

Duration: The field next to the **RFC 6349 Test on Service 1** check box is used to set the duration of the TCP Throughput phase per direction in hh:mm format: 1 minute (default) to 24 hours.

Threshold (% of ideal) allows to enter the TCP Throughput as a percentage of the Ideal L4 Throughput that will be used to declare the pass/fail verdict for both directions: **0** to **100** %; default is **95** %.

Services

Allows the selection of the number of services: **1** (default) to **4**.

The following parameters are configurable individually for each service:

➤ Profile

Two profiles are defined by default as well as **User Profile**. Profiles are user definable and up to 25 profiles can be predefined (see *Customizable Profiles* on page 211).

Profile	Parameter				
	Frame Type	Frame Sizes	VLAN Priority	DSCP	Performance Criteria
Priority	EMIX	64, 128, 512, 1024, and 1518 ^a	7	CS7 ^b	MEF Metro High
Best Effort			0	CS0 ^b	MEF Metro Low

- a. The minimum frame size value is adjusted according to the frame structure and components selected as shown in the table of *Frame Size* on page 208.
- b. ECN is not present and not configurable but is set to 00 (Not-ECT).

Note: *At least one check box (**CIR** or **CIR+EIR**) has to be selected. Thus, clearing the CIR check box while CIR+EIR check box is cleared, will automatically select the CIR+EIR check box and vice versa.*

Note: *For Dual Test Set, the CIR and CIR+EIR values are the same (Symmetric) for both **L->R** and **R->L** directions.*

- **CIR** (Mbit/s) (Committed Information Rate) check box when selected (default) sets the service rate guaranteed by the SLA (default is **1 Mbit/s**).
- **CIR+EIR** (Mbit/s) check box when selected (cleared by default) sets the best effort allowed traffic for the service. The EIR (Excess Information Rate) value is equal to the CIR+EIR value minus CIR (default is 1.5 Mbit/s). The threshold value is configurable from the defined CIR value for this service to the line rate minus the total CIR from all services.
- **Frame Type** allows the selection of the frame type and frame size(s).
 - **Frame types** choices are: **Fixed** and **EMIX**.

Fixed allows to set a single frame size.

EMIX allows to set up to 8 EMIX frame sizes. The EMIX frame sequence is repeated until the test ends. Default are **64**, **128**, **512**, **1024**, and **1518**.

Quantity, available with **EMIX**, allows to select the number of EMIX frame sizes: 2 to 8 frames (default is **5**).

Test Setup - Test Configurator, Timer, and System

Network Details (iSAM)

➤ Frame Size

Type	Frame Size (bytes)
Fixed (default)	64 ^a (default) to 16000 ^b
EMIX	64 ^a to 16000 ^b

- a. The minimum value is adjusted according to the frame structure and components selected as shown in the following table.
- b. The maximum frame size is limited to 10000 for 10/100/1000Mbps electrical interface.

The following table lists each component that may affect the minimum frame size value.

Component	Description
C-VLAN	4 bytes
UDP	8 bytes
Ethernet Header	14 bytes
IPv4	20 bytes
Using DTS	4 bytes

Note: *Sending traffic with frame size > 1518 in switched network may results in losing theses frames.*

► Classification

Allows the selection of the value for the selected classification:

Classification	Value
VLAN ID	0 through 4095 (default is 2). Refer to <i>VLAN ID and Priority</i> on page 679.
VLAN Priority	0 (default) to 7. Refer to <i>VLAN ID and Priority</i> on page 679.
DSCP	000000 (CS0) (default), 001000 (CS1), 010000 (CS2), 011000 (CS3), 100000 (CS4), 101000 (CS5), 110000 (CS6), 111000 (CS7), 001010 (AF11), 001100 (AF12), 001110 (AF13), 010010 (AF21), 010100 (AF22), 010110 (AF23), 011010 (AF31), 011100 (AF32), 011110 (AF33), 100010 (AF41), 100100 (AF42), 100110 (AF43), 101110 (EF), 110011 (S1), 110110 (S4).

Test Setup - Test Configurator, Timer, and System

Network Details (iSAM)

► Performance Criteria

The following performance criteria are available by default:

Name	≤ FD (ms)	≤ IFDV (ms)	≤ FLR (%)
MEF Metro High	10	3	0.01
MEF Metro Med	20	8	0.01
MEF Metro Low	37	Disabled	0.1
MEF Regional High	25	8	0.01
MEF Regional Med	75	40	0.01
MEF Regional Low	125	Disabled	0.1
MEF Continental High	77	10	0.025
MEF Continental Med	115	40	0.025
MEF Continental Low	230	Disabled	0.1
MEF Global High	230	32	0.05
MEF Global Med	250	40	0.05
MEF Global Low	390	Disabled	0.1

User Performance allows the configuration of the following values per service:

- **FD (Latency): 0.015 to 8000 ms** (default is **15 ms**).
- **IFDV (Jitter): 0.015 to 8000 ms** (default is **2 ms**).
- **FLR (Frame Loss): 0 to 5 %** (default is **0.1 %**).

Note: *The **Performance Criteria** list is user definable and up to 25 Performance criteria can be created (see Customizable Performance Criteria on page 213).*

Customizable Profiles

As previously mentioned, 2 profiles are available by default and up to 25 profiles can be predefined by editing the profile's text file (iSAMProfilesTemplate.ini) using a word processor like **Notepad**. The file is located under ProgramData\EXFO\ProtocolProducts\.

Example of profile's text file:

```
[Priority]
Frame Type = EMIX
Frame Size = 64, 128, 512, 1024, 1518
VLAN Priority = 7
DSCP = CS7
Performance Criteria = MEF Metro High

[Best Effort]
Frame Type = EMIX
Frame Size = 64, 128, 512, 1024, 1518
VLAN Priority = 0
DSCP = CS0
Performance Criteria = MEF Metro Low
```

Test Setup - Test Configurator, Timer, and System

Network Details (iSAM)

Each profile entry has the following parameters.

- **Profile Name:** 1 to 16 characters. All ASCII characters from 32 to 126 decimal are supported.
- **Frame Type:** Enter **Fixed** or **EMIX**. When the frame type is missing from a profile, **EMIX** is used.
- **Frame Size** (see *Frame Size* on page 208 for possible values); when the frame size is missing from a profile, default value(s) is used:
For **Fixed**: Enter a unique frame size.
For **EMIX**: Enter 2 to 8 frame sizes with a comma between each entry.
- **VLAN Priority**¹ (optional): Enter the priority number.
- **DSCP**¹ (optional): Enter either the DSCP name or its binary value.
- **Performance Criteria**¹: Enter the name of the performance criteria. When the **Performance Criteria** is missing from a profile or is not available from the user profile file, the **User Performance** criteria is used.

When a parameter is missing from a profile, the default value of the missing parameter is used.

The value of a parameter is validated to ensure it is within the supported range; otherwise the profile entry is unsupported.

If the profile file contain more than 25 profiles, only the first 25 valid profiles are retained.

1. See *Classification* on page 209 for possible values.

Customizable Performance Criteria

As previously mentioned, factory performance criteria are available and up to 25 performance criteria can be defined by editing the performance criteria text file (iSAMPerformanceCriteriaTemplate.ini) using a word processor application like **Notepad**. The file is located under ProgramData\EXFO\ProtocolProducts\.

Example of performance criteria's text file:

```
[MEF Metro High]
FD = 10
IFDV = 3
FLR = 0.01

[MEF Metro Med]
FD = 20
IFDV = 8
FLR = 0.01

[MEF Metro Low]
FD = 37
IFDV =
FLR = 0.1
```

Each profile entry has the following parameters:

- Performance Criteria Name: 1 to 16 characters. All ASCII characters from 32 to 126 decimal are supported.
- Frame Delay (FD) Threshold: 0.015 ms to 8000 ms.
- Inter-Frame Delay (IFDV) Threshold: 0.015 ms to 8000 ms.
- Frame Loss Ratio (FLR) Threshold: 0 % to 5 %.





If the threshold value for a parameter is not defined, it is considered as disabled (as in the example above for IFDV =).RequiredForFormatting


The value of a parameter is validated to ensure it is within the supported range; otherwise the performance criteria entry is unsupported.

Optical Device Under Test (iOptics)

From the **Test** menu, tap **Setup**, and **Test Configurator**.

- **Transceiver selection:** Tap on a transceiver icon to select the interface/port. The selected transceiver is highlighted with an amber contour. The selected transceiver type and its status are displayed.

Status	Description
	Validating the transceiver.
	Transceiver correctly detected.
	Incompatible transceiver detected.
	Missing transceiver.

- **Rate:** Once the transceiver is correctly detected  , select the interface rate. Rates depend on the selected port and the inserted transceiver.

Transceiver	Rate			
	Transport	Ethernet	Fibre Channel	Wireless
CFP4, QSFP28	OTU4 (4 Lanes)	100GE (4 Lanes)	-	-
QSFP+	OTU3e2 (4 Lanes) OTU3e1 (4 Lanes) OTU3 (4 Lanes)	40GE (4 Lanes)	-	-

Test Setup - Test Configurator, Timer, and System

Optical Device Under Test (iOptics)

Transceiver	Rate			
	Transport	Ethernet	Fibre Channel	Wireless
SFP/SFP+ (Port 1 only)	OTU2	10GE WAN	1X	CPRI - 1.2G
	OTU1e	10GE LAN	2X	CPRI - 2.4G
	OTU2e	1GE Optical	4X	CPRI - 3.1G
	OTU1f	100M Optical	8X	CPRI - 4.9G
	OTU2f		10X	CPRI - 6.1G
	OTU1		16X	CPRI - 9.8G
	OC-192/STM-64			OBSAI - 3.1G
	OC-48/STM-16			
	OC-12/STM-4			
	OC-3/STM-1			
	OC-1/STM-0			

- **Vendor Name, Part Number, Serial Number, Connector Type, and Mode** are information retrieved from the transceiver (see page 216).

Test Setup - Test Configurator, Timer, and System

Optical Device Under Test (iOptics)

- **More** gives additional transceiver information and settings.
- **Parameters** are retrieved from the transceiver:

Parameter	CFP4	QSFP	SFP SFP+
Module ID	X	X	X
Vendor Name	X	X	X
Part Number	X	X	X
Serial Number	X	X	X
Hardware Revision	X	X	X
Firmware Version	X	-	-
Adaptor Revision	-	-	-
Revision Compliance	-	X	-
Connector Type	X	X	X
Speed	X	X	X
Type/Compliance Code	X	X	X
Wavelength	-	-	X
Mode	X	X	X
Power Class	X	X	X
Lane Ratio Type	X	-	X
WDM Type	X	-	X
CLEI Code	X	X	X

- **Lasers OFF at Start-Up** allows to automatically turn off all lasers when starting the module or when switching from one test application to another. This check box is cleared by default.

Remote Details (iSAM)

The remote block automatically scan the remote modules for **DTS** and **Remote Loopback** modes and allows the selection of the remote module that is used to loop back the traffic via **Smart Loopback** or EtherSAM in **Dual Test Set (DTS)** mode for simultaneous bidirectional results. The number module available for remote connection is displayed. If the connection with the remote module is not manually established, the remote connection process is automatically performed when starting the test.

From the **Test** menu, tap **Setup, Test Configurator**, and the **More** button from the **Remote** block.

Note: *Not available with **Manual Loopback** remote operation mode.*

For both DTS and Remote Loopback Operation Modes

➤ Discovered Remotes

The modules are discovered dynamically and listed with their **Name**, **IP** address, **Status**, **Connection**, and **Preferred** information. **Name** and **Status** are only available for remote 700G/800 Series, 800v2 Series, 890/890NGE, 88000 Series, and 85100G modules. Only modules from the same subnet are automatically discovered. To access a module from a different subnet, use the **Add** button.

Test Setup - Test Configurator, Timer, and System

Remote Details (iSAM)

- **Preferred** check box when selected indicates that this module is part of the preferred module's list. Preferred remote modules will be considered first during the automatic connection process as follows:

Priority	Preferred or not	Status
1	Preferred	Available
2		Taken
3		Test in Progress
4	Non Preferred	Available
5		Taken
6		Test in Progress

- **Status**

Background Color	Status	Description
Green	Ready	Connected with the local unit
	Running	
Yellow	Taken	Connected with another unit
Red	Test in Progress	Test in progress with another unit
No color	Unreachable	Preferred remote does not reply
	Available	Not connected

- **Connection** indicates **Connected** when the local unit is connected to a remote module.
- **Add** button is used to add a preferred remote module to the preferred list. Enter the IP address of the remote module and tap **OK**. This is useful to access a module from a different subnet.

For Remote Loopback Operation Mode

- **Loop-Up** button establishes the connection with the selected remote module and sets the remote module into **Smart Loopback** test application.

Following a successful loop-up, the IP address of the remote module will be used as the destination IP address for the test.

- **Overtake** button manually establishes the connection with the remote module and set the remote module into Smart Loopback test application. Available when the status is **Taken** or **Test in Progress** with another unit. A confirmation is required to overtake a module.
- **Loop-Down** button ends the connection between the local and the remote modules.

For DTS Operation Mode

- **Connect** button manually establishes the connection with the selected remote module and sets the remote module into DTS EtherSAM test application.

Following a successful connection, the IP address of the remote module will be used as the destination IP address for the test.

- **Overtake** button manually establishes the connection with the remote module and set the remote module into DTS EtherSAM test application. Available when the status is **Taken** or **Test in Progress** with another unit. A confirmation is required to overtake a module.

Following a successful connection, the IP address of the remote module will be used as the destination IP address for the test.

- **Disconnect** button, available once the connection with the remote module is established, terminates the connection with the remote module. Available when the status is **Ready**.

For Manual Loopback Operation Mode

- **MAC**, available with layer L2, allows to enter the destination MAC address of the remote.
- **IP**, available with L3/L4, allows to enter the destination IP address of the remote.
- Resolved MAC address status, available with L3/L4, indicates:
 - **Resolving** when the ARP process is resolving.
 - **Resolved** when the ARP process is resolved.
 - **Failed** when the ARP process failed.
- **Quick Ping**, available with layer L3/L4, tests if the destination IP address can be reached. A message displays if the ping attempt is **Successful** or **Failed**.

RFC 2544 - Global

From the **Test** menu, tap **Setup**, **Test Configurator**, tap on the RFC 2544 block, and on the **Global** tab.

Dual Test Set

- **Dual Test Set (DTS)** check box when selected (cleared by default) enables RFC 2544 **Dual Test Set**. Once **Dual Test Set** is enabled, use the **Discover Remote** button to select a remote unit. Not available in **Dual Port** topology.

Note: *Alternatively it is possible to use the Discover Remote button to connect to a remote module and automatically enable the **Dual Test Set**. For more details, refer to Discover Remote Button on page 572.*

- **Disconnected** indicates that there is no connection established with a remote module.
- **Connected** indicates that the connection is established with a remote module.
- **Discover Remote** button allows to discover remote modules supporting **Remote Loopback** and/or **Dual Test Set**. For more details, refer to *Discover Remote Button* on page 572.

Global Options

- **Flow Direction** allows the selection of the traffic direction as follows:
 - **TX to RX** for **Single Port** topology.
 - **Port #1 to Port P2, Port #2 to Port #1**, and **Bidirectional** for **Dual Port** topology.
 - **Local to Remote, Remote to Local**, and **Bidirectional** for **Dual Test Set**.
- **Rate Unit** determines the unit used to display the rate values: **%**, **Mbit/s**, or **Gbit/s**.
- **Pass/Fail Verdict** check box when selected (default) enables the use of the pass/fail verdict.

Subtests and Estimated Time

- **Subtests** allows to individually enable the **Throughput**, **Back-to-Back**, **Frame Loss**, and **Latency** subtests.
- **Estimated Time (H:MM)** indicates the estimated time required to complete each subtest at best conditions. The total estimated time to complete all subtests is also displayed.

Frame Distribution

- **Frame Distribution** allows to select either **RFC 2544** (default) or **User Defined** distribution.
- **Quantity** is only available when **User Defined** is selected and allows to select the number of frames, from **1** to **7** (default), in the distribution.
- **Frame Size (Bytes):** For **RFC 2544** distribution, gives predefined frame size distribution values. For **User Defined** distribution, enter up to seven frame size values.

Distribution	Frame Size
RFC 2544	64 ^a , 128, 256, 512, 1024, 1280, and 1518
User Defined	64 ^a to 16000

- a. The minimum frame size will be adjusted according to the frame structure and components selected.

The following table lists each component that may affect the minimum size value.

Component	Description
VLAN	4 bytes per VLAN tag (up to 3 VLAN tags)
LLC and SNAP Headers	8 bytes
IPv4	20 bytes
IPv6	40 bytes
Using DTS	4 bytes

Restore RFC 2544 Defaults

Reverts the configured parameters to their default values.

RFC 2544 - Subtests

From the **Test** menu, tap **Setup**, **Test Configurator**, tap on the RFC 2544 block. and on the **Subtests** tab.

Allows the configuration of each enabled subtest.

Throughput

The objective of this test is to find the throughput of the device under test for which there is no frame loss. Starting at the specified maximum rate (**Max. Rate**), the rate converges towards the highest throughput without frame loss. The search is done with a halving/doubling method until a final value is reached. The test performs the number of trials defined (**Trials**). The throughput measurement is validated the number of times specified (**Validations**) for the predefined duration (**Trial Duration**). The **Accuracy** and **Acceptable Errors** specify how precise the result must be. The test is performed for each defined frame size.

- **Max. Rate** is the maximum rate the test should begin with, in terms of a percentage of the line rate (%), **Mbit/s**, or **Gbit/s**. For **Dual Test Set** Max. Rate is configurable for both local to remote (**L->R**) and remote to local (**R->L**) directions. For **Dual Port** topology, Max. Rate is configurable for both P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**) directions.

Interface Speed		Max. Rate	
		%	
		Mbit/s	Gbit/s
10 Mbit/s	0.0050 to 100.0000 ^a	0.00001 to 10.000 ^a	Not Applicable
100 Mbit/s	0.0050 to 100.0000 ^a	0.0001 to 100.000 ^a	Not Applicable
1000 Mbit/s	0.0050 to 100.0000 ^a	0.001 to 1000.00 ^a	0.000001 to 1.000 ^a
10G LAN	0.0050 to 100.0000 ^a	0.01 to 10000.000 ^a	0.00001 to 10.000 ^a
10G WAN ^b	0.0005 to 92.8571 ^a	0.01 to 9285.71 ^a	0.00001 to 9.28571 ^a
40G	0.0050 to 100.0000 ^a	0.1 to 40000.0 ^a	0.0001 to 40.0000 ^a
100G	0.0050 to 100.0000 ^a	0.1 to 100000.0 ^a	0.0001 to 100.0000 ^a

a. Default value.

b. The maximum value for 10G WAN may be lower depending on the frame size. The maximum value will be adjusted for each frame size.

- **Trial Duration** is the time for each trial in minutes:seconds: **1** second (default) to **30** minutes.
- **Trials** is the number of times the throughput test will be generated: **1** (default) to **50** trials.

Test Setup - Test Configurator, Timer, and System

RFC 2544 - Subtests

- **Accuracy** is the accuracy measurement in percentage of the line rate (%), **Mbit/s**, or in **Gbit/s**. The accuracy is not based on the configured **Maximum Rate** but on the Ethernet line rate. The accepted values are as follows:

Interface Speed	%	Max. Rate	
		Mbit/s	Gbit/s
10 Mbit/s	0.1 to 10.0 (default 1.0)	0.01 to 1.0 (default 0.10)	Not Applicable
100 Mbit/s	0.1 to 10.0 (default 1.0)	0.1 to 10.0 (default 1.0)	Not Applicable
1000 Mbit/s	0.1 to 10.0 (default 1.0)	1 to 100.0 (default 10)	0.001 to 0.100 (default 0.010)
10G LAN	0.1 to 10.0 (default 1.0)	10.0 to 1000.0 (default 100)	0.01 to 1.00 (default 0.10)
10G WAN	0.1 to 10.0 (default 1.0)	10.0 to 1000.0 (default 100.00)	0.01 to 1.00 (default 0.1)
40G	0.1 to 10.0 (default 1.0)	40.0 to 4000.0 (default 400.0)	0.04 to 4.00 (default 0.40)
100G	0.1 to 10.0 (default 1.0)	100.0 to 10000.0 (default 1000.0)	0.10 to 10.00 (default 1.0000)

- **Acceptable Errors** represents the number of acceptable errors for the test: **0** (default) to **10**.
- **Validations** represents the number of times the result should be validated: **1** (default) to **50** times.

Back-to-Back

The objective of this test is to find the maximum number of frames that can be sent at maximum throughput without frame loss. A burst of frames (**Burst Time**) is sent with minimum inter-frame gaps to the device under test and the number of forwarded frames is counted. If the count of transmitted frames is equal to the number of forwarded frames, the length of the burst is increased and the test is rerun. If the number of forwarded frames is less than the number of transmitted frames, the length of the burst is reduced and the test is rerun. The Back-to-Back value is the number of frames in the longest burst that the Device Under Test (DUT) can handle without the loss of any frames. The test performs the number of defined trials (**Trials**). The **Accuracy** and **Acceptable Errors** settings specify how precise that result must be. The test is performed for each defined frame size.

- **Burst Time** is expressed in seconds: **1** (default) to **5** seconds.
- **Trials** represents the number of times the Back-to-Back test will be generated: **1** (default) to **100** trials.
- **Accuracy (Frames)** is the accuracy measurement value in frames: **1** (default) to **50** frames.
- **Acceptable Errors** represents the number of acceptable errors for the test: **0** (default) to **10**.
- **Bursts** represents the number of burst that will be generated: **1** (default) to **10**.

Frame Loss Configuration

The objective of this test is to find the percentage of frames that are lost due to lack of resources. Starting at the specified maximum rate (**Max. Rate**), the test is performed for a specific frame size and for the specified duration (**Trial Duration**). The test is repeated by decreasing the rate by the specified granularity (**Granularity**), then the test is repeated again until there are two successive trials in which no frames are lost. The test is performed for the defined number of trials (**Trials**). The test is performed for each defined frame size.

- **Max. Rate** is the maximum rate the test should begin with, in terms of a percentage of the line rate (%), **Mbit/s**, or **Gbit/s**. The accepted values are as shown in the Max. Rate table on page 225. For **Dual Test Set**, **Max. Rate** is configurable for both local to remote (**L->R**) and remote to local (**R->L**) directions. For **Dual Port** topology, Max. Rate is configurable for both P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**) directions.
- **Trial Duration** represents the time value for each trial in minutes:seconds: **1** second to **30** minutes (default is **00:01**).
- **Trials** represents the number of times the test will be generated: **1** (default) to **50** trials.
- **Granularity** corresponds to the percentage interval between each throughput value used for the test: 1 % to 10 % (RFC) - (default). For example, 10 % granularity means that the test will be performed for 100 %, 90 %, 80 %... of the rate value.

Latency Configuration

The objective of the test is to measure the time required for the frame to go through the device under test and return back to source. Starting by sending a stream of frames for the predefined duration (**Trial Duration**) and throughput (**Max. Rate**) at a particular frame size, an identifying dependent tag is included in one frame. The time at which this frame is transmitted is recorded (**timestamp A**). When the tagged frame comes back, the time is recorded again (**timestamp B**) and the Latency result is: **timestamp B - timestamp A**. The test is repeated for the defined number of times (**Trials**) and the average result is calculated. The test is performed for each defined frame size.

- **Trial Duration** represents the time value for each trial in “minutes:seconds”: **1** second (default) to **2** minutes.
- **Trials** represents the number of times the test will be generated: **1** (default) to **50** trials.
- **Copy From Throughput** check box, when selected (default), uses the Throughput subtest results max rate value for each corresponding frame size. When the check box is cleared, it is possible to set the **Max. Rate** by tapping on the **Config. per Frame Size** button.
- **Margin %**, available when **Copy From Throughput** check box is selected, decreases the max rate value(s) from the Throughput subtest by a value corresponding to the percentage of the line rate specified: **0** (default) to **10** percent.

- **Measurement Mode**, available with **Dual Test Set** for rates from 10M to 10GE, allows the selection of the latency measurement mode: **Round-Trip** (default) or **One-Way**.

Synchronization with an external 1PPS clock is required to perform One-Way Latency measurement. One-Way Latency is only possible when both the local and remote 1PPS signal clocks are valid. The following alarms are available with One-Way Latency measurement mode.

LOPPS-L and **LOPPS-R** (Loss Of Pulse Per Second - Local/Remote) are declared when either no pulse is received or when no pulse is received within 1 second $\pm 6.6 \mu s$ after the previous pulse. LOPPS-R is only monitored once the DTS connection is established.

- **Config. per Frame Size** is available when the **Copy From Throughput** check box is cleared and allows to set the **Max. Rate** for each frame size. For **Dual Test Set** the **Max. Rate** is configurable for both local to remote (**L->R**) and remote to local (**R->L**) directions. For **Dual Port topology**, *Max Rate is configurable for P1 to P2 (P1->P2) and P2 to P1 (P2->P1) directions.*

All Frames check box when selected (cleared by default) allows to enter the maximum rate that will be applied to all frame sizes.

Thresholds Button

Note: For *Dual Test Set*, thresholds are configurable for **Local to Remote** and **Remote to Local** directions at the exception of Round-Trip Latency Threshold for which the value is unique. For **Dual Port** topology, thresholds are configurable for P1 to P2 (P1->P2) and P2 to P1 (P2->P1) directions.

- **Throughput Threshold** sets the threshold¹ value used to declare a pass/fail verdict and it applies to all frame sizes when applicable. The range is as follows:

Interface Speed	%	Max. Rate	
		Mbit/s	Gbit/s
10 Mbit/s	0.000 to 100.000 ^a	0.000 - 10.000 ^a	Not Applicable
100 Mbit/s	0.000 to 100.000 ^a	0.000 - 100.000 ^a	Not Applicable
1000 Mbit/s	0.000 to 100.000 ^a	0.000 - 1000.000 ^a	0.000 - 1.000 ^a
10G LAN	0.000 to 100.000 ^a	0.000 - 10000.000 ^a	0.000 - 10.000 ^a
10G WAN ^b	0.000 to 92.8571 ^a	0.000 - 9230.769 ^a	0.000 - 9.230 ^a
40G	0.000 to 100.000 ^a	0.000 - 40000.000 ^a	0.000 - 40.000 ^a
100G	0.000 to 100.000 ^a	0.000 - 100000.000 ^a	0.000 - 100.000 ^a

- a. Default value.
- b. The maximum value for 10G WAN may be lower depending on the frame size. The maximum value will be adjusted for each frame size.

- **Back-to-Back Threshold** sets the threshold¹ value in percentage of frames per burst to declare a pass/fail verdict. The range is from **0.0** to **100.0** (default) percent and it applies to all frames sizes when applicable.

1. The verdict is PASS when the received/measured value is greater or equal to the threshold value.

Test Setup - Test Configurator, Timer, and System

RFC 2544 - Subtests

- **Frame Loss Threshold (%)** sets the threshold¹ value of frame loss. The range is from **0.000** to **100.000** (default is **0.100**) and it applies to all frame sizes when applicable.
- **Latency Threshold / Round-Trip Latency Threshold** sets the threshold value as the maximum delay in **ms** or **μs**. The range is from **0.5** to **8000.0 ms** (default is **125.0 ms**) and it applies to all frame sizes when applicable. For **Dual Test Set**, only available with **Round-Trip Latency Measurement Mode** (see *Latency Configuration* on page 229).
- **One-Way Latency Threshold**, available for **Dual Test Set** with **One-Way Latency Measurement Mode** (see *Latency Configuration* on page 229), sets the maximum one-way latency value in millisecond, allowed for all frame sizes: **0.005** to **500 ms** (default is **125 ms**).
- **Latency Unit** allows to either select **ms** or **μs** as the reference unit for the **Latency Threshold**.

1. The verdict is PASS when the received/measured value is lower or equal to the threshold value.

RFC 6349

From the **Test** menu, tap **Setup, Test Configurator**, and the RFC 6349 block.

Connection

- **Operation Mode** allows the selection of the test operation mode: **Dual Test Set (DTS)** or **EXFO|Worx Interop**.

The connection is graphically displayed with its status as follows:

Operation Mode	Status	Description
Dual Test Set	Disconnected	No connection established with a remote module.
	Connected	Connection established with a remote module.
EXFO Worx Interop	Disconnected	Verifier not detected (not reachable, invalid IP, or invalid TCP port).
	Ready or Running	Verifier detected, either running (remote unit locked) or ready to perform a test. The detection of NAT (Network Address Translation) router presence is automatically detected and graphically displayed. The WAN IP address is also displayed when the FTB is behind a NAT router.
	Busy	Verifier busy with another client (locked).

- **Discover Remote** button, available with **Dual Test Set**, allows to discover remote modules supporting **Dual Test Set**. For more details, refer to *Discover Remote Button* on page 572.
- **Direction** allows the selection of the traffic direction: **Local to Remote**, **Remote to Local**, and **Bidirectional** (default).

- **Remote IP Address**, available with **EXFO|Worx Interop**, is either the remote IP address of the verifier or the WAN IP address when the verifier is behind a NAT router.
- **TCP Port**, available with **EXFO|Worx Interop**, is the port used by the server located at the remote side: **1** to **65535**, default is **50201**.

Parameters

- **Multiple Connections** check box when selected (default) indicates that the applicable TCP Throughput phases are performed with multiple connections; otherwise TCP Throughput phases are performed within a single connection.

- **TCP Server Port** is available with **Dual Test Set**.

Local TCP Server Port is the port used by the server located at the local side: **1** to **65535** (excluding **62819** that is used for DTS connection), default is **50201**.

Remote TCP Server Port is the port used by the server located at the remote side: **1** to **65535** (excluding **62819** that is used for DTS connection), default is **50201**.

- **CIR**

The Local-to-Remote CIR and Remote-to-Local CIR represent the Committed Information Rate of the Ethernet Service under test: **1.0 Mbit/s** to Line Rate. The CIR is not used to actually transmit frames at this rate but to calculate a Bandwidth Delay Product (BDP) which in turn is used to set the Max Window Size of the TCP connections.

Rate Unit determines the unit used to display the rate values: **Mbit/s** (default) or **Gbit/s**.

- **TOS/DS** (IPv4) allows to enter an hexadecimal value, **00** (default) to **FF**. Changing the **IP TOS/DS** value will affect the **TOS/DS Config** settings and vice versa.

MTU

- **Max MTU (bytes)** determines the Maximum Transfer Unit (MTU) to use when the client is generating TCP traffic toward the server: from **1080** to **1500** bytes (default).
- **Path MTU Discovery** check box when selected (default) allows to perform a Packetization Layer Path MTU Discovery phase.

Window Sweep

- **Window Sweep** check box when selected (default) allows to perform the Window Sweep phase.
- **Duration (per step)** is the duration of the Window Sweep phase per direction and per Window tested: 30 seconds (default) to 5 minutes.

TCP Throughput

- **Duration** is the duration of the TCP Throughput phase per direction: 1 minute (default) to 30 days.
- **Pass/Fail Verdict** check box when selected (default) enables the use of the pass/fail verdict.
- **Threshold (% of ideal)** allows to enter the TCP Throughput as a percentage of the Ideal L4 Throughput that will be used to declare the pass/fail verdict for both directions: **0** to **100** %; default is **95** %.

Restore RFC 6349 Defaults

Reverts the configured parameters to their default values.

S-OAM and MPLS-TP OAM

From the test menu, tap **Setup, Test Configurator**, and the **S-OAM (Y.1731/802.1ag/MEF)** or **MPLS-TP OAM (G.8113.1)** test block.

OAM Mode

Allows the selection of the OAM mode.

OAM Type	OAM Mode
S-OAM	Y.1731 (default) supports both Connectivity Fault Management and Performance Monitoring which includes all S-OAM functions supported by this module.
	802.1ag supports Connectivity Fault Management including only the Continuity Check, Loopback, Link Trace, and RDI functions.
	MEF supports both Connectivity Fault Management and Performance Monitoring which includes all S-OAM functions supported by this module.
MPLS-TP OAM	G.8113.1 (default) supports both Connectivity Fault Management and Performance Monitoring which includes all MPLS-TP OAM functions supported by this module.

S-OAM and MPLS-TP OAM Responder

S-OAM Responder or **MPLS-TP OAM Responder** check box when selected (default) allows to respond to LBM, LTM, DMM, LMM, and SLM valid messages (test running or not). LTM and SLM are only available with Ethernet OAM. Traffic statistics are also monitored (refer to *Responder* on page 484).

For S-OAM: A valid message must have its source MAC address matching the Peer MEP MAC address, destination MAC address matching either the unit port Unicast MAC address or a Multicast class 1 address, VLANs matching the unit port VLANs, and MEG/MD Level matching the local MEG/MD Level. Refer to *Unicast/Multicast Addresses for Ethernet OAM* on page 678 for more information.

For MPLS-TP OAM: A valid message must have its: destination MAC address matching either the unit MAC address, FF:FF:FF:FF:FF:FF, or 01:00:5E:90:00:00; VLANs matching the unit port VLANs; MPL Labels matching the local MPLS Label Stack configuration, including GAL; MEG Level matches the local MEG Level. For the Loopback function, a valid message must also have its: MEP ID of the target MEP ID TLV matching the Local MEP ID or ID Sub-Type is 0x00 (Discovery); and MEP ID and MEG ID of the requesting MEP ID TVL, if present, matching respectively the Peer MEP ID and the Local MEG ID.

Respond to... message	Respond with... message
LBM	LBR
LTM ^a	LTR
DMM	DMR
LMM	LMR
SLM ^a	SLR

a. Only available with Ethernet OAM.

Pass/Fail Verdict

Pass/Fail Verdict check box when selected (default) enables the use of the pass/fail verdict. A global fail verdict is declared when any of the following condition is met: **Link Down** alarm, **Loss Continuity** alarm, or any fail verdict for **Frame Delay**, **Frame Loss**, **Synthetic Loss** (Only applicable to Ethernet OAM), **Frame Delay Failure**, **Frame Loss Failure**, **Synthetic Loss Failure** (Only applicable to Ethernet OAM), **Loopback Failure**, or **Test Failure**.

Thresholds

Available with G.8113.1, Y.1731 and MEF OAM Modes when Pass/Fail verdict is enabled. The verdict is PASS when the measured value is lower or equal to the threshold value.

- **Frame Delay Threshold (ms)** allows to set the threshold value of frame delay: **0.001** to **8000** ms (default is **50** ms).
- **Frame Loss Threshold (%)** allows to set the threshold value of frame loss: **0.001** to **100** % (default is **10** %).
- **Synthetic Loss Threshold (%)**, available with Ethernet OAM (Y.1731 and MEF), allows to set the threshold value of Synthetic Loss: **0.001** to **100** % (default is **10** %).

Next HOP Router (G.8113.1)

- **MAC Address**, available when **Resolve MAC** check box is cleared, allows to enter the Next HOP Router MAC address: 00:00:00:00:00:00 to FF:FF:FF:FF:FF:FF, default is 01:00:5E:90:00:00. The MAC Address 01:00:5E:90:00:00 is reserved for point-to-point link and can be used when the unicast address is unknown (as per RFC-7213).
- **Resolve MAC** check box, when selected (cleared by default), sends a request to the network to retrieve the MAC address corresponding to the selected IP address.
- **IP Address**, available when **Resolve MAC** check box is selected, allows to enter the Next HOP Router IP address: 0.0.0.0 to 255.255.255.255 for IPv4; default is the source IP address; ::1 to FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF for IPv6, default is 2001::.

Local Parameters

- **MEG ID** (Y.1731 and G.8113.1) is the Maintenance Entity Group Level identification allowing to enter a 13-bytes MEG ID value/message to be generated (default value is **EXFO MEG ID**). Values should be ASCII suitable characters including the *ITU T.50 Characters* on page 36.

Padding allows the selection of the character (**Null** or **Space**) to used for remaining byte values.

- **MAID** (802.1ag and MEF) is a 45 bytes Maintenance Association Identification that is divided into two parameters:
 - **Domain ID** is an optional domain identification text field (0 byte (Domain ID not present), up to 44 bytes minus the **MA Name** field length) set to **EXFO Domain ID** by default.
 - **MA Name** (Short MA Name) is a Maintenance Association Name text field set to **EXFO MA Name** by default. The length of the **MA Name** field is from 1 to either 44 bytes minus the **Domain ID** field length when Domain ID is present or 45 bytes when not present.

Test Setup - Test Configurator, Timer, and System

S-OAM and MPLS-TP OAM

- **MEG Level** (Y.1731, MEF, and G.8113.1) is the Maintenance Entity Group Level configurable from **0** to **7** (default).
- **MD Level** (802.1ag) is the Maintenance Domain Level and is configurable from **0** to **7** (default).
- **MEP ID** is the Maintenance Entity Group End Point Identification configurable from **0x0001** (default) to **0x1FFF**.

Peer MEP Parameters

- **MAC Address**, available with S-OAM Mode, allows to enter the unique Media Access Control (MAC) address of the peer MEP (default is **00:00:00:00:00:00**).
- **MEP ID** is the Maintenance Entity Group End Point Identification configurable from **0x0001** (default) to **0x1FFF**.
- **OAM Quick Ping** verifies the bidirectional connectivity with the peer MEP. The **Successful** message is reported when at least one of three attempts has been successful otherwise **Failed** is reported.

Continuity Check

- **CC Function** check box when selected (default) allows to transmit and monitor CCM frames.

The following parameters are only configurable when the **CC Function** check box is cleared.

- **Address Type**, available with S-OAM Mode, defines the destination address type of the CCM frames: **Unicast** or **Multicast** (default).
- **Priority**, available with S-OAM Mode or when VLAN is enabled (see *VLAN* on page 203), allows to select the VLAN user priority: **0** to **7** (default). Refer to *VLAN ID and Priority* on page 679 for more information.

- **Drop Eligible**, available with S-OAM Mode or when VLAN is enabled (see *VLAN* on page 203), is set to **No** (no frames will be dropped when congestion occurs) and is not configurable.
- **Period** determines the transmission period of the CCM frame: **3.33 ms**, **10 ms**, **100 ms** (default), **1 s**, **10 s**, **1 min**, or **10 min**.

MPLS-TP Label Stack (G.8113.1)

➤ MPLS-TP Mode

PW (Pseudo-Wire) (default) provides an emulation of a point-to-point connection over a packet-switching network. The PW begins and ends at the LER or PE (Provider Edge).

LSP (Label Switch Path) is a path through a MPLS network, it begins and ends at LER or LSR.

Section is a segment between two adjacent LER/LSR.

- **Label 2** check box when selected enables the MPLS Label 2. The Label 2 check box is configurable for PW and LSP (cleared by default) and is forced cleared for Section.
- **Label 1** check box when selected enables the MPLS Label 1. The **Label 1** check box is forced selected for PW and LSP and forced cleared for Section.
- **GAL** check box when selected enables the Generic Associated Channel Label. The GAL check box is forced selected for LSP and Section and is configurable for PW (selected by default).
- **Label** is configurable for **Label 1** and **Label 2**: **16** to **1048575**, default is **16**. Label is not configurable for GAL and is set to **13**.
- **TC** sets the Traffic Class: **0** (default) to **7**.
- **TTL** sets the Time To Live: **1** to **255**, default is **128**.

Test Function

Note: *Test Function parameters are not configurable when the **TX Enable** check box is selected.*

- **Function** allows the selection of the test function to be performed.
 - **Loopback** (default) function is used to verify the bidirectional connectivity to a peer MEP (**Continuous** check box cleared) and to verify its capability to sustain close to line rate traffic (diagnostic test; **Continuous** check box selected).
 - **Test** function is used to generate a test signal and/or verify the integrity of received test signal from the peer MEP.
 - **Frame Delay** function is used to measure the round trip delay with the peer MEP.
 - **Frame Loss** function is used to measure the frame loss with the peer MEP in both directions from a single end point.
 - **Synthetic Loss** function is used to measure the frame loss with the peer MEP in both directions from a single end point using synthetic frames.
- **TX Enable** check box when selected (cleared by default) allows transmission of frames. However the transmission will only begin when the test is started or if the test is already running. When the **Continuous** check box is cleared, the **TX Enable** check box is automatically cleared once all frames have been transmitted.
- **Address Type**, available with S-OAM Mode, defines the destination address type of the frame: **Unicast** (default) or **Multicast**. Availability of address types depend on selected **S-OAM Mode** and **Test Function**.
- **Continuous** check box when selected (default) specifies that the frame generation is continuous. The **Continuous** check box is cleared for Multicast address type.

- **Requesting MEP ID TLV** (G.8113.1) check box when selected (default) determines if the Requesting MEP ID TLV is present in the LBM frame. The **Requesting MEP ID TLV** check box is cleared and not selectable when the **Continuous** check box is selected.
- **Priority**, available with S-OAM Mode or when VLAN is enabled (see *VLAN* on page 203), allows to select the VLAN user priority: **0** (default) to **7**. Refer to *VLAN ID and Priority* on page 679 for more information.
- **Drop Eligible**, available with S-OAM Mode or when VLAN is enabled (see *VLAN* on page 203), when set to **Yes** (DEI = 1), the transmitted frames will be dropped first on receipt when congestion occurs under test. Drop Eligible is only configurable with **Unicast** address type, otherwise is set to **No** (Default). Drop Eligible is set to **No** for **Frame Delay**, **Frame Loss**, and **Synthetic Loss** functions.
- **Period** determines the transmission period of frames which is set to **100 ms**. **Period** is not applicable for Multicast address type or when the **Continuous** check box is selected.
- **TX Rate (%)** is the transmission rate of the LBM frame: **0.0001** to **95 %** for 10M, **99.5 %** for 100M, **99.95 %** for 1G, **99.995 %** for 10G LAN, and **92.8521 %** for 10G WAN. Only available with Loopback test function when the **Continuous** check box is selected.

Test Setup - Test Configurator, Timer, and System

S-OAM and MPLS-TP OAM

- **Frame Size** allows to enter the frame size. The frame size range for Ethernet II frame format is as follows:
 - S-OAM Mode: 64 to 1518¹. The minimum frame size is adjusted according to the frame structure and parameters selected. For Frame Loss function, the frame size is not configurable and set to the minimum value.
 - MPLS-TP OAM Mode: Minimum and maximum values are as follows. The minimum frame size is adjusted according to the frame structure and parameters selected.

Test Function	MPLS-TP Mode		
	PW	LSP	Section
Loopback	68 ^a to 16000 ¹	72 to 16000 ¹	68 to 16000 ¹
Test	68 to 1522	68 to 1522	64 to 1518
Frame Delay	68 ^{a,b} to 1522	72 ^b to 1522	68 ^b to 1518
Frame Loss ^c	68	68	64

- a. Add 4 bytes when the **GAL** check box is selected.
- b. Add 2 bytes when **Test ID** is selected as **TLV Type**.
- c. The frame size is not configurable and set to the minimum value.

The following table lists each parameter that may affect the minimum and maximum¹ frame size value.

Parameter	Number of bytes to be added	Apply to
802.3 SNAP	8 bytes	Y.1731, MEF, G.8113.1
VLAN	4 bytes per VLAN (up to 3 VLAN)	

1. For the Loopback function the maximum frame size is 16000 bytes for all rates at the exception of 10/100/1000Mbps electrical interface which is 10000 bytes.

Parameter	Number of bytes to be added	Apply to
Label 2	4 bytes	G.8113.1
Continuous	18 bytes for Data TLV Type 21 bytes for Test TLV Type	
Requesting MEP ID TLV	56 bytes	

Note: Sending traffic with frame size >1518 in switched network may result in losing all frames.

- **Frame Count** is the quantity of frames to be transmitted: **1** to **1000** at the exception of **Frame Loss** function which is **2** to **1000** (default is **10**); set to **1** for Loopback function with Multicast address type; not applicable when the **Continuous** check box is selected at the exception of **Synthetic Loss** function.
- **TLV Type** defines the TLV Type included in the frame: **Data** (Default), **Test** (**Loopback** (**Y.1731** and **G.8113.1**) and **Test** functions), and **Test ID** (**Frame Delay** function); is set to **Test** for the **Test** function; set to **Data** for **Synthetic Loss** function; not available for **Frame Loss** function.
- **Payload**, available with **Data** TLV Type, defines the repeating byte pattern used to fill the payload of the **Data** TLV: **0x00** to **0xFF** (default is **0xCC**).
- **Test Pattern**, available with **Test** TLV Type, defines the test pattern used to fill the **Test** TLV: **PRBS31** (default), **NULL**.
- **Test ID**, available with **Test ID** TLV or **Synthetic Loss** function, defines the test ID: **0x00000000** to **0xFFFFFFFF** (default is **0x00000001**).

Restore Carrier Ethernet OAM Defaults

Reverts the Carrier Ethernet OAM test application to its default factory settings.

Services - Global

From the **Test** menu, tap **Setup**, **Test Configurator**, tap on the services block, the **Global** tab, and on the **General** button.

General Button

The following parameters are displayed and configurable per service.

- Check boxes:
 - The first check box (top-left) allows to sequentially enable service(s) within the limit of the link capacity when the **Service Performance Test** is enabled or enable all services when the **Service Performance Test** is disabled.
 - The check boxes next to the service numbers allow to enable each service individually.

When the **Service Performance Test** is enabled, up to 10 services can be enabled one after the other, as long as the **Total TX Rate** (bandwidth) is not reached (**Committed**). For example, if the first service is using the full bandwidth available, then no other service can be enabled. If the first enabled service uses half bandwidth, then at least another service can be enabled using up to half bandwidth. Thus, to enable a second service, first set the CIR value within the non-used bandwidth (**Available**), then enable it.

When the **Service Performance Test** is disabled, up to 10 services can be enabled one after the other; the total TX rate is not limited.

- **Service Name** indicates the name of each service. Tap on the **Service Name** button to modify the name of each service. See *Services - Profile* on page 249 for more information.
- **Direction**, available with **Dual Test Set** or **Dual Port** topology, indicates respectively results from local to remote (**L->R**) and remote to local (**R->L**), or P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**).

- **Frame Size** indicates the frame size of each service. Tap on the **Frame Size** button to modify the frame size of each service.
- **Framing** indicates the framing of each service. Tap on the **Framing** button to modify the **Frame Format**, **Network Layer**, **Transport Layer**, **VLAN**, **S-OAM MEG/MD Level**, and **MPLS** when applicable (see **Modify Frame Structure** from the *MAC/IP/UDP* on page 183).
- **VLAN (ID/Priority)** indicates the ID and Priority of each VLAN level for each service. Tap on the **VLAN** button to modify the VLAN settings (see **VLAN** from the *MAC/IP/UDP* on page 183).
- **Addressing** indicates the source and destination IP or MAC addresses for each services. Tap on the **Addressing** button to modify the addressing (see **MAC** and **IP** from the *MAC/IP/UDP* on page 183).

Batch button allows bulk configuration for services addressing. Select the check box of each configuration parameter that needs to be copied and set its parameters. From **Apply To**, select all services the copy applies to and tap on the **Copy From** to proceed.

SLA Button

The SLA parameters are displayed and configurable per service. Click on the desired column button to access the configuration settings.

See *General Button* on page 246 for more information on check boxes, **Direction**, and **Service Name**.

See *SLA Parameters* on page 254 for more information on **CIR**, **CIR+EIR**, **CBS**, **EBS**, **Max Jitter**, **Max Latency**, and **Frame Loss Rate**.

Total TX Rate

Note: Only available when the **Service Performance Test** check box is selected (see EtherSAM - Global on page 144). For **Dual Test Set**, the total TX rates are displayed for both **Local** and **Remote** directions.

- **Committed** displays the total enabled TX rate (bandwidth) that will be generated by the selected service(s).
- **Available** displays the total TX rate (bandwidth) available for traffic generation.

Global Options

Rate Unit choices are % (default), **Mbit/s**, and **Gbit/s**.

Copy Service Button

Copy Service button allows to copy the services configuration to one or several services.

- **Copy Service** allow to select the services number from which the configuration will be copied from.
- **To the following Services** allows to select all services that will inherit the configuration from the selected service. An orange background represents a selected service. A service that is already enabled cannot be selected for copy.
- **Copy** allows to confirm the service configuration copy for all selected services.

Services - Profile

The EtherSAM test application supports the configuration of up to 10 different services individually. All parameters are configurable per service.

From the **Test** menu, tap **Setup**, **Test Configurator**, tap on the services block, and on the **Profile** tab.

Service Selection and Activation

Select the service to be configured by either using the left/right arrow or by tapping over the service numbers area then tapping on a specific service number. An orange background indicates the selected service while a green background indicates the services that are enabled.

- **Service** associates a name to the selected service number. Up to 16 characters are allowed. Default service names are **Service 1** to **Service 10**.
- **Enable** check box when selected (cleared by default) enables the selected service. However, the service will be generated only when the test is started. For **Dual Test Set**, services can only be enabled once the connection with the remote unit is established.

When the **Service Performance Test** is enabled, up to 10 services can be enabled one after the other, as long as the **Total TX Rate** (bandwidth) is not reached (**Committed**). For example, if the first service is using the full bandwidth available, then no other service can be enabled. If the first enabled service uses half bandwidth, then at least another service can be enabled using up to half bandwidth. Thus, to enable a second service, first set the CIR value within the non-used bandwidth (**Available**), then enable it.

When the **Service Performance Test** is disabled, up to 10 services can be enabled one after the other; the total TX rate is not limited.

Total TX Rate

Note: Only available when the **Service Performance Test** check box is selected (see EtherSAM - Global on page 144).

Indicates the total transmit rate of all services enabled for transmission. Unit selection is available from the *SLA Parameters* on page 254.

Profile

- **Profile** button allows to select the emulation profile. The selected service profile icon, name, and configuration (when applicable) is displayed next to the **Profile** button.

Select the emulation profile: **Voice**, **Video**, or **Data** (default).

Voice

- **Voice Codec** choices are **VoIP G.711** (default), **VoIP G.723.1**, and **VoIP G.729**.
- **Number of Calls** allows the selection of the equivalent number of calls that will be generated for the selected stream (default is **1**).
- **CIR** indicates the committed information rate in Mbps based on the number of calls selected.

Video

- **Video Codec** choices are **SDTV (MPEG-2)** - (default), **HDTV (MPEG-2)**, and **HDTV (MPEG-4)**. Only **SDTV (MPEG-2)** is available with the 10 Mbps interface.
- **Number of Channels** is the equivalent number of channels that will be generated for the selected service (default is **1**).
- **CIR** indicates the committed information rate in Mbps based on the number of channels selected.

Note: The **CIR** value will be calculated on the basis of the selected service profile and the value entered in the **Number of Calls** or **Number of Channels** field.

- **Frame Size (Bytes)** indicates the frame size for **Voice** and **Video** profiles and allows to change the frame size for **Data** profile:

Fixed (default)

Profile and Codec	Type	Frame Size (bytes)	
		IPv4	IPv6
Voice Codec: - VoIP G.711 - VoIP G.723.1 - VoIP G.729	Fixed	138	158
		82	102
		78	98
Video Codec: All	Fixed	1374	1394
Data	Fixed (default)	64 ^a (default) to 16000 ^b	
	Random	64 ^a to 1518 ^c	
	EMIX	64 ^a to 16000 ^b	

- The minimum value is adjusted according to the frame structure and components selected as shown in the following table.
- The maximum frame size is limited to 10000 for 10/100/1000Mbps electrical interface.
- The maximum frame size value is adjusted for each enabled VLAN (+4 bytes per VLAN).

Test Setup - Test Configurator, Timer, and System

Services - Profile

The following table lists each component that may affect the minimum frame size value.

Component	Description
VLAN	4 bytes per VLAN (up to 2 VLAN)
MPLS	4 bytes per label (up to two labels)
UDP	8 bytes
TCP	20 bytes
Ethernet Header	14 bytes
LLC and SNAP Headers	8 bytes
IPv4	20 bytes
IPv6	40 bytes
Using DTS	4 bytes

Note: *Sending traffic with frame size > 1518 in switched network may results in losing theses frames.*

- **EMIX** button is available when EMIX type is selected. The EMIX frame sequence is repeated until the test ends.

Quantity allows to select from 2 to 8 frames size values (default is **5**).

EMIX Frame Sizes allows to set the EMIX frame sizes (default are **64, 128, 512, 1024, and 1518**). The minimum frame size value is adjusted according to the frame structure and components selected as shown in the above table.

Restore Default button reverts the quantity and EMIX frame sizes to their default values.

Test Parameters

Note: *Unit selection is available from the SLA Parameters on page 254.*

For **Dual Test Set**, parameters are configurable for both local to remote (**L->R**) and remote to local (**R->L**) directions.

For **Dual Port** topology, parameters are configurable for both P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**).

- **Traffic Policing** check box when selected (default) allows to stress the rate limiting of the network by sending traffic at higher rate than committed by the SLA.
- **Burst Max Rate** allows to set the rate that is used for the CBS and EBS burst tests. Only available when the **Burst Test** is enabled (see *EtherSAM - Global* on page 144).

Note: *Changing a criteria value (CIR, CIR+EIR, Ramp Traffic Policing, or Burst Max Rate) may affect the other criteria values in order to comply to the following rules:*

$CIR \leq CIR+EIR \leq \text{Ramp Traffic Policing Rate} \leq \text{Line Rate}$

$CIR \leq CIR+EIR \leq \text{Burst Max Rate} \leq \text{Line Rate}$

However, make sure that the criteria values comply to the following rule with an adequate margin, as per ITU-T Y.1564 standard, for a burst test to be valid:

$CIR < CIR+EIR < \text{Burst Max Rate} \leq \text{Line Rate}$

SLA Parameters

The Service-Level Agreement (SLA) parameters allow enabling and defining the pass/fail verdict thresholds for the service.

For **Dual Test Set**, parameters are configurable for both local to remote (**L->R**) and remote to local (**R->L**) directions at the exception of Max Round-Trip Latency for which the value is unique.

For **Dual Port** topology, parameters are configurable for both P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**).

Information Rate

- Unit choices are % (default), **Mbit/s**, or **Gbit/s**. This unit is also used for **Total TX Rate** and for **Test Parameters (Traffic Policing and Burst Max Rate)**.

Note: *At least one check box (**CIR** or **CIR+EIR**) has to be selected. Thus, clearing the **CIR** check box while **CIR+EIR** check box is cleared, will automatically select the **CIR+EIR** check box and vice versa.*

- **CIR** (Committed Information Rate) check box when selected (default) sets the service rate guaranteed by the SLA. The threshold value is configurable from **0.0001**¹ to **100** percent (default is **50** percent). CIR and preceding steps are not performed for services that have the CIR check box cleared.
- **CIR+EIR** check box when selected (cleared by default) sets the best effort allowed traffic for the service. The EIR (Excess Information Rate) value is equal to the CIR+EIR value minus CIR. The threshold value is configurable from **0.0001**¹ to **100** percent (default is **75** percent).

Burst Size settings are only available when the **Burst Test** is enabled (see *EtherSAM - Global* on page 144).

- Burst Size unit choices are **Bytes** (default) or **ms**.

1. The minimum rate is 1Mbit/s when the **Frame Size** is **Random**.

- **CBS** check box when selected (default) sets the maximum committed burst size to which services' frames will be sent and be CIR-compliant (default is **12144** bytes). The CBS minimum and maximum values are affected by the **CIR**, **Burst Max Rate**, and **Frame Size** values. CBS is only available when CIR check box is selected.
- **EBS** check box when selected (cleared by default) sets the maximum excess burst size to which services' frames will be sent and be CIR+EIR compliant (default is **12144** bytes). The EBS minimum and maximum values are affected by the **CIR+EIR**, **Burst Max Rate**, and **Frame Size values**. EBS is only available when **CIR+EIR** check box is selected.

Performance Criteria

- **Max Jitter (ms)** allows to set the maximum jitter value in millisecond, allowed for the service: **0.015** to **8000 ms** (default is **2 ms**).
- **Max Round-Trip Latency (ms)** allows to set the maximum round-trip latency value in millisecond allowed for the service: **0.015** to **8000 ms** (default is **15 ms**). For **Dual Test Set**, only available with **Round-Trip Latency Measurement Mode** (see *Global Options* on page 147). Not available in **Dual Port** topology.
- **Max Latency**, available for **Dual Test Set** with **One-Way Latency Measurement Mode** (see *Global Options* on page 147) and Dual Port topology, allows to set the maximum one-way latency value in millisecond, allowed for the service: **0.015** to **500 ms** (default is **15 ms**).
- **Frame Loss Rate** allows to set the maximum rate of Frame Loss allowed for the service: **0.0E00** to **5.0E-02**, default is **1.0E-03**.

Note: *For Dual Test Set, the Frame Loss Rate is changed to percentage when the remote module does not support exponential notation. In this case a Frame Loss Rate Threshold lower than 1.0E-06 (0.0001 %) is considered as 0 %; the configurable range is 0 to 5 percent.*

Signal (Transport)

From the **Test** menu, tap **Setup, Test Configurator**, the interface block, and the **Signal** tab.

Physical Interface - Optical

Note: For electrical interface, see Physical Interface - Electrical on page 258.

- **Optical Lane**, available with parallel interface, indicates the optical lane number.

Optical Interface	Optical Lane Number
OTU3 (4 Lanes) [43.018 Gbit/s] OTU3e1 (4 Lanes) [44.571 Gbit/s] OTU3e2 (4 Lanes) [44.583 Gbit/s] OTU4 (4 Lanes) [111.81 Gbit/s]	0 through 3

- **Laser**¹ indicates the status of the laser: **ON** with the laser pictogram (emitting an optical laser signal) or **OFF**.
- **TX Power (dBm)**¹ indicates, when supported, the transmit power level of the optical lane/laser in dBm.
- **Wavelength (nm)**¹ indicates, when supported, the detected lane/laser wavelength.
- **RX Power (dBm)**¹ indicates, when supported, the current received power level of the optical lane/laser in dBm.

Green: Power level in range.

Yellow: Power level out-of-range.

Red: Loss of signal or power level is close to damage.

Gray: Invalid operational range value.

1. Displayed for each optical lane for parallel interfaces.

- **Min RX Power (dBm)**¹ indicates, when supported, the minimum received power level of the optical lane/laser in dBm.
- **Max RX Power (dBm)**¹ indicates, when supported, the maximum received power level of the optical lane/laser in dBm.
- **Laser ON/OFF** button is used for parallel interface to activate the laser control per optical lane or for all lanes.

Optical lane numbers are from **0** to **3**.

- **All Lanes** check box, when selected, applies the change(s) to all optical lanes at once.
- **Optical Lane** indicates the optical lane numbers and **All** which represents the setting for all optical lanes when the **All Lanes** check box is selected.
- **Laser** check box, when selected, indicates that the corresponding optical laser lane is activated and emitting an optical laser signal.
- **Lasers OFF at Start-Up** check box when selected automatically turns OFF the laser for serial interfaces or all lasers for parallel interfaces when starting the Power Blazer or when switching from one test application to another. However the laser remains ON, on a remote module receiving a request for a DTS connection or a loopback command. This check box is cleared by default.
- **Power Range (dBm)** indicates the transceiver operational RX power range.

1. Displayed for each optical lane for parallel interfaces.

Physical Interface - Electrical

Note: The following settings are available with electrical signal and their availability depend on the signal itself and its mapping. For optical interface, see Physical Interface - Optical on page 256.

- **LBO (Line Build Out):** The **LBO** allows to meet the interface requirements over the full range of cable lengths.

Signal	LBO
DS1	Preamplification values: DSX-1 (0-133 ft)^a , DSX-1 (133-266 ft) , DSX-1 (266-399 ft) , DSX-1 (399-533 ft) , DSX-1 (533-655 ft) , Cable simulation (CSU Emulation mode) values: CSU (0.0 dB) , CSU (-7.5 dB) , CSU (-15.0 dB) , CSU (-22.5 dB) .
DS3	0 to 225 ft range^a , 225 to 450 ft range , and Cable Simulation 900 ft .
E1/E3/E4	Not available
STS-1e/STM-0e	0 to 225 ft range^a , 225 to 450 ft range , and Cable Simulation 900 ft .
STS-3e/STM-1e	0 to 225 ft range .

a. Default value

➤ Line Coding

Signal	Line Coding
DS1	AMI and B8ZS ^a
DS3	B3ZS
E1	AMI and HDB3 ^a
E3	HDB3
E4	CMI
STS-1e/STM-0e	B3ZS
STS-3e/STM-1e	CMI

a. Default value.

➤ RX Termination

Signal	Termination
DS1/E1	Term ^a , Mon, and Bridge.
DS3/E3/E4/STS-1e/STM-0e/STS-3e/STM-1e	Term ^a , and Mon

a. Default value.

- **Power** indicates the received signal level in dBdsx for DS_n or dBm for PDH and SONET/SDH.
- **Amplitude** indicates the received signal amplitude as well as its MIN, and MAX received values.

TX Frequency

Note: The following TX Frequency information applies to serial interface only, refer to TX Frequency on page 153 for parallel interfaces.

- **TX Frequency (GHz)** indicates the frequency (actual frequency + Frequency offset) used for transmission.
- **Offset (ppm)** check box, when selected (cleared by default), allows to set the frequency offset that will be generated. Use the “+” or “-” button to respectively increment or decrement the frequency offset value based on the defined **Increment/Decrement Size**, or directly type the frequency offset value in the field. Possible offsets are:

Interface	Frequency Offset ^a	Nominal Frequency
DS1	± 140 ppm	1544000 bit/s
E1	± 70 ppm	2048000 bit/s
E3	± 50 ppm	34368000 bit/s
DS3		44736000 bit/s
STS-1e/STM-0e		51840000 bit/s
E4		139264000 bit/s
STS-3e/STM-1e		155520000 bit/s
OC-1/STM-0	± 50 ppm	51840000 bit/s
OC-3/STM-1		155520000 bit/s
OC-12/STM-4		622080000 bit/s
OC-48/STM-16		2488320000 bit/s
OC-192/STM-64		9953280000 bit/s
OTU1	± 50 ppm	2666057143 bit/s
OTU2	± 50 ppm (Framed) ± 120 ppm (Unframed)	10709225316 bit/s

Interface	Frequency Offset ^a	Nominal Frequency
OTU1e	± 120 ppm	11049107143 bit/s
OTU2e		11095727848 bit/s
OTU1f		11270089286 bit/s
OTU2f		11317642405 bit/s

- a. The frequency offset range is guaranteed for a source signal at 0 ppm. In the event that the source signal already has an offset, then the output signal may exhibit an offset larger than the range specified.

Note: *Frequency offset is not available when **Through** mode is selected.*

Step Size (ppm) allows to set the increment/decrement value (from 0.1 to the maximum offset) that will be used when changing the frequency offset with the “+” or “-” button.

RX Frequency

Note: The following RX Frequency information applies to serial interface only, refer to RX Frequency on page 154 for parallel interfaces.

- **Frequency (GHz)** indicates the frequency of the input signal.
- **Offset (ppm)** indicates the frequency offset between the standard rate specification and the rate at the input signal.

Note: For both **Frequency** and **Offset** the following background colors are used:

Background color	Description
Green	The frequency is in range.
Red	The frequency is out-of-range. LOC is also displayed.
Gray	Pending state.

- **Max. Negative Offset (ppm)** indicates the maximum negative frequency offset between the standard rate specification and the rate from the received signal.
- **Max. Positive Offset (ppm)** indicates the maximum positive frequency offset between the standard rate specification and the rate from the received signal.

Note: Refer to Interface on page 331 for more information on standard rate specifications.

Signal Configuration

- For OTN, refer to *Signal - Signal Configuration (OTN)* on page 273 for more information.
- For SONET/SDH, refer to *Signal - Signal Configuration (SONET/SDH)* on page 275 for more information.
- For DSn/PDH, refer to *Signal - Signal Configuration (DSn/PDH)* on page 264 for more information.

Signal - Signal Configuration (DSn/PDH)

For SONET/SDH - DSn/PDH BERT, from the test menu, tap **Setup**, **Test Configurator**, and the protocol block. Only **Framing** setting and the **Loopback** button are available.

For DSn/PDH BERT and NI/CSU Emulation, from the test menu, tap **Setup**, **Test Configurator**, and the interface block.

Framing


Framing allows the selection of the framing that will be used for transmission.

DS1	DS3	E1	E3/E4
Unframed SF ESF ^a SLC-96	Unframed C-Bit Parity ^a M13	Unframed PCM30 ^a PCM30 CRC-4 PCM31 PCM31 CRC-4	Unframed Framed ^a

a. Default value

Background

For multiplex test case, allows the selection of the default timeslot background traffic: **AIS** (default) or **All Zeros**.

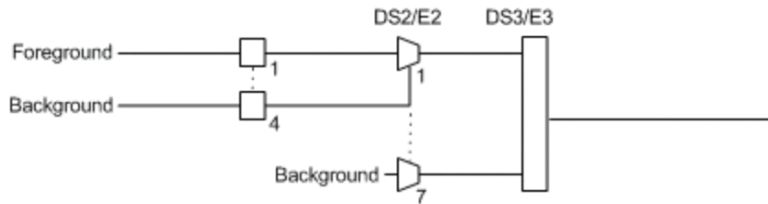

The diagram above shows a test case defined with DSn/PDH traffic where the background traffic is also inserted for the unused timeslots in a test case data path. The insertion is similar to the low order path SONET/SDH terminated signal where the background traffic format inserted uses the same rate as the one defined in the test case data path.

Channel

Channel, for multiplex text case, allows the selection of the channel number of the mapped signal.

DS0/E0

DS0/E0 check box when selected, cleared by default, activates the DS0/E0 testing. DS0/E0 configuration is not available when the framing is set to **Unframed**. Once selected, a summary of the payload content is displayed indicating the number of timeslot set to Pattern and Idle/Tone. The Modify DS0/E0 button is also displayed.

Modify DS0/E0

Modify DS0/E0 button is only available when the DS0/E0 check box is selected.

Note: For DS0, the framing structure have 23 timeslots. For E0, the framing structure PCM-30 and PCM30 CRC-4 have 30 channel timeslots while PCM-31 and PCM-31 CRC-4 have 31 channel timeslots.

- **DS0/E0 Size** sets the channel timeslot data rate for the pattern payload content to either **56K** or **64K** (default). A timeslot data rate of 56 Kbit/s uses 7 bits while 64 Kbit/s uses 8 bits to carry the payload information.
- **Zero Code Suppression** allows the selection of the Zero Code Suppression (ZCS) method used to replace the all-zero bytes of the Idle and Tone payload contents. The ZCS mechanism is a global parameter meaning that all channel timeslots configured with Tone/Idle data, use the same ZCS method. Choices are:

ZCS	Description	Available with
None ^a	No Zero Code Suppression	DS0 and E0
Jammed Bit 8	Every 8th (LSB) bit is forced to 1.	DS0 and E0
GTE	Bit 8 of an all zero channel byte is replaced by 1, except in signaling frames where bit 7 is forced to 1.	DS0
Bell	Bit 7 of an all zero channel byte is replaced by 1.	DS0

a. Default value.

Note: Bit 8 is the Least-Significant Bit (LSB) and bit 1 is the Most-Significant Bit (MSB).

Bit #	1	2	3	4	5	6	7	8
	MSB							LSB

➤ **Payload Content and Set All**

Payload Content allows the selection of the payload content that will be applied to all TX timeslots when tapping the **Set All** button: **Pattern**, **Idle**, or **Tone**.

➤ **TX**

Select the payload content by tapping once or several times on each timeslot until the desired content appears: **Pattern** (default), **Idle**, or **Tone**.

Note: For **Pattern**, the pattern that will be used is the one selected from **Pattern** on page 124.

Tone (Hz) allows the selection of a tone for digital milliwatt testing. The signal output power, when converted to analog, is 0 dBm. Choices are **1000 Hz** and **1004 Hz** (default). The selected Tone applies to all timeslots set to Tone.

Idle uses the Idle code byte from the Idle field. Choices are **00** to **FF**. The selected Idle code applies to all timeslots set to Idle. The default setting is **7F**.

Note: The timeslots set to **Idle** or **Tone** can be changed from **Idle** to **Tone** and vice versa even when the test is running; the **Idle** and **Tone** values can also be changed.

Binary allows either displaying the Idle code values in binary (when selected) or in hexadecimal (default).

Test Setup - Test Configurator, Timer, and System

Signal - Signal Configuration (DSn/PDH)

➤ RX

Apply Channel TX to RX, available for decoupled test, allows to apply the RX payload content based on the TX settings. **None** will be used when TX is set to either **Idle** or **Tone**.

Note: *The RX timeslot selection is only configurable in a **Decoupled** topology when the **Apply Channel TX to RX** check box is cleared. A warning is displayed when the number of Pattern timeslot does not match between TX and RX. This is to ensure pattern continuity between the TX and RX interface in a MUX/DEMUX test even if used through a cross-connect device.*

Select the payload content by tapping once or several times on each timeslot until the desired content appears.

Pattern (default) uses the pattern from the received signal.

None does not use the pattern.

Loopback button

The Loopback feature generates a code that is interpreted by the DUT. The DUT interprets the command and implements the loopback.

Select the type of loopback that will be used to overwrite the traffic that will be generated. Choices are listed in the following table in addition with 10 predefined Loop Codes (see *Modify Loop Codes button* on page 270).

Loopback Type	Command	
	Loop-Up	Loop-Down
CSU (10000/100)	10000 (default)	100
NIU FAC1 (1100/1110)	1100	1110
NIU FAC2 (11000/11100)	11000	11100
NIU FAC3 (100000/100)	100000	100

- **Loop-Up** injects the selected loop up code. The loop code will be generated continuously for a maximum of 10 seconds or until the loopback is confirmed. After 10 seconds, if the loopback has failed, a Loop-Down command is sent. A pop-up window appears indicating the loop code injection progress and result. The text box next to the Loop-Up button indicates the selected loop up code.
- **Loop-Down** injects the selected loop down code. The loop code will be generated continuously for a maximum of 10 seconds or until the loopback is confirmed. After 10 seconds, if the loopback has failed, a Loop-Down command is sent. A pop-up window appears indicating the loop code injection progress and result. The text box next to the Loop-Down button indicates the selected loop down code.

Test Setup - Test Configurator, Timer, and System

Signal - Signal Configuration (DSn/PDH)

➤ **Modify Loop Codes** button

Allows the configuration of 10 DS1 loop code pairs. Configure each loop code name, Loop-Up and Loop-Down values.

The name field allows up to 16 characters long. Loop-Up and Loop-Down range is from 3 to 16 bits (**000** to **1111111111111111**). The default DS1 loop codes correspond to the DS1 In-Band loop codes (Loop-Up=**10000**, and Loop-Down=**100**).

DS1 Loopback - for NI/CSU Emulation Test

The Loopback feature generates a code that is interpreted by the DUT. The DUT interprets the command and implements the loopback.

➤ **Mode** selects the loopback control Mode; **Manual** or **Auto-Response**.

➤ **Type**

For **Manual**: Select the Type of loopback code that will be applied; **Line**, or **Payload**. Payload is not available when the framing is **Unframed**.

For **Auto-Response**: Select the Type of loopback code on which the NetBlazer V2 Series will respond; **In-Band** or **Out-of-Band**. **Out-of-Band** is only available when the interface framing is set to ESF. The Loop-UP and Loop-Down values are automatically updated to the In-Band or Out-of-Band selection (Type).

➤ **Status** indicates either **Loopback Active** with a green loopback icon or **No Loopback** with a gray loopback icon.

➤ **Loop Code** selects the type of loopback that will be used to overwrite the traffic that will be generated.

In-Band loop code	Loop-UP Code	Loop-Down Code
CSU (10000/100)	10000	100
NIU FAC1 (1100/1110)	1100	1110
NIU FAC2 (11000/11100)	11000	11100
NIU FAC3 (100000/100)	100000	100
Loop Code 1 to 10	Refer to <i>Modify Loop Codes</i> button on page 270.	

Test Setup - Test Configurator, Timer, and System

Signal - Signal Configuration (DSn/PDH)

Out-of-Band loop code	Loop-UP Code	Loop-Down Code
Line	00001110 11111111	00111000 11111111
Payload	00010100 11111111	00110010 11111111
Reserved For Network Use	00010010 11111111	00100100 11111111
ISDN Line (NT2)	00101110 11111111	00100100 11111111
CI/CSU Line(NT1)	00100000 11111111	00100100 11111111

- **Force Release / Activate / Release**
 - **Force Release** button, available with **Auto-Response** mode, allows to release a loopback condition initiated from the network. Only available when a loopback is active.
 - **Activate** button, available with **Manual** mode when no loopback is active, allows to send a loopback condition.
 - **Release** button, available with **Manual** mode when a loopback is active, allows to release the loopback condition.
- **Loop-Up** indicates the selected loop up code.
- **Loop-Down** indicates the selected loop down code.
- **Modify Loop Codes** button: See *Modify Loop Codes button* on page 270 for more information.

Signal - Signal Configuration (OTN)

Note: *The following signal configuration parameters are available from the interface block.*

From the **Test** menu, tap **Setup, Test Configurator**, the interface block, and on the **Signal** tab.

- **OTU4, OTU3, OTU3e1, OTU3e2, OTU2, OTU2f, OTU1f, OTU2e, OTU1e, or OTU1**

Note: *At least one of the two check boxes, **FEC** or **Scrambler**, must be selected in order to prevent potential alarms caused by a lack of bit transition on the optical signal. For example to disable **FEC**, first select the **Scrambler** check box then clear the **FEC** check box.*

- **FEC** check box, when selected (default), enables the FEC in TX/RX and allows to detect, report, and correct up to 8 symbol errors (Correctable) per codeword. If there are over 8 symbol errors detected, they are reported as uncorrectable errors.
- **Scrambler** check box, when selected (default), provides enough “0” and “1” transitions on the optical signal for clock recovery.

Note: *When the **Scrambler** check box is cleared, the receiver circuitry is forced to operate in a condition which is outside of the specified OTN operating conditions which may cause alarms/errors. This configuration can be used for special analysis in a lab environment.*

Test Setup - Test Configurator, Timer, and System

Signal - Signal Configuration (OTN)

- **ODU4, ODU3, ODU3e1, ODU3e2, ODU2, ODU2f, ODU1f, ODU2e, ODU1e, or ODU1.**
- **OPU Tributary Port**, available for each OPU level of a mapped signal, indicates the OPU tributary port used for the test. Tap the **Modify Trib Slots/Port** button to change the OPU tributary port.
- **OPU Tributary Slots**, available for each OPU level of a mapped signal, indicates the OPU tributary slots used for the test. Tap the **Modify Trib Slots/Port** button to change the OPU tributary slots.
- **TCM** indicates each Tandem Connection enabled; **No TCM** indicates that no TCM is enabled. To enable TCM, tap the **Config TCM** button.

- **Config TCM**

Allows to enable each TCM level (1 to 6) individually. All ODUx of a mapped signal are also available. All TCM check boxes are cleared by default (disabled). Refer to *Traces (OTN)* on page 299 for more information.

Signal - Signal Configuration (SONET/SDH)

From the **Test** menu, tap **Setup, Test Configurator**, the interface block, and the **Signal** tab.

OC/STM Signal

- **Synchronization Status Message (S1):** Bits 5 through 8 of the S1 byte are used to convey synchronization status of the NE. Not available with **Through** topology.

Bits 5 to 8	Description	
	SONET	SDH
0000 ^a	Synchronized - Traceability Unknown (STU)	Quality Unknown
0001	Stratum 1 Traceable (ST1)	Reserved
0010	Reserved	ITU G.811 (PRC)
0011	Reserved	Reserved
0100	Transit Node Clock Traceable (TNC)	SSU-A
0101	Reserved	Reserved
0110	Reserved	Reserved
0111	Stratum 2 Traceable (ST2)	Reserved
1000	Reserved	SSU-B
1001	Reserved	Reserved
1010	Stratum 3 Traceable (ST3)	Reserved
1011	Reserved	ITU-T G.813 Option I (SEC)
1100	SONET Minimum Clock Traceable (SMC)	Reserved
1101	Stratum 3E Traceable (ST3E)	Reserved
1110	Provisionable by the Network Operator (PNO)	Reserved
1111	Don't Use for Synchronization (DUS)	Do not use for synchronization

- a. Default message.

Test Setup - Test Configurator, Timer, and System

Signal - Signal Configuration (SONET/SDH)


- **REI-L/MS-REI Computation Method** (OC-192/STM-64 only): Allows to select the default method used to calculate the REI-L/MS-REI error for OC-192 and STM-64 signals. Choices are **M1 Only** and both **M0 and M1**. The default setting is M1 only.
- **STS/AU and VT/TU Mappings** Timeslot/Number

Timeslot (SONET) allows the selection of the STS timeslot number. Refer to *SONET Numbering Convention* on page 670 for more information.

Number (SDH) allows the selection of the AU channel number. Refer to *SDH Numbering Convention* on page 671 for more information.
- **TCM** check box when selected (cleared by default) allows Tandem Connection Monitoring (TCM).
- **TC-UNEQ-P / TC-UNEQ-V / HPTC-UNEQ / LPTC-UNEQ** check boxes when selected (cleared by default) allows the monitoring of the corresponding Tandem Connection - Unequipped alarm. Only available when the **TCM** check box is selected.
- **Overwrite Fixed Stuff** (STS-1 only) check box when selected (default) fills up the bytes of the STS-1 SPE's columns 30 and 59 with the selected pattern from the tab *BERT* on page 124.
- **Background Traffic** allows the selection of the high order path background traffic: **AIS**, **Equipped** (PRBS23) - (default), or **Unequipped**.

STS/AU Path (SONET/SDH HOP):

The following diagram shows a test case data path that is terminated right after SONET/SDH high order path. High order background traffic is automatically adapted to the rate (STS-1, AU-3, or AU-4) signal level for the paths that are not defined in the test case.

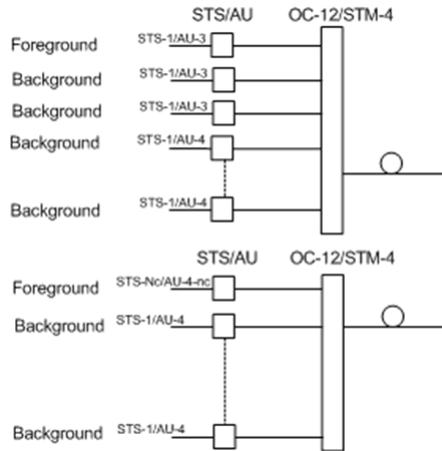


Test Setup - Test Configurator, Timer, and System

Signal - Signal Configuration (SONET/SDH)

VT/TU Path (SONET/SDH LOP)

The following diagram shows a test case data path that is terminated at the SONET/SDH low order path. The remaining STS-1 or AU-3 timeslot not involved in the test case are filled with background traffic of STS-1 or AU-3 level depending on the interface being SONET or SDH. At the low order path level, the data path not involved in the data path defined in the test case are filled with a background traffic equivalent to the VT Group (VTG) or Tributary Unit Group (TUG) type defined by the traffic selected in the data path. Further, the remaining VTG or TUG within the high order path, selected in the test case, are respectively filled with traffic of equivalent rate for SONET and SDH data paths.

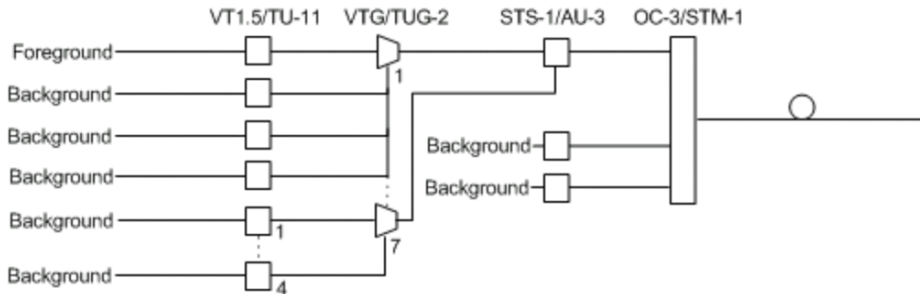

Smart Loopback

Note: The Smart Loopback block is only displayed when the **Transparent (Pseudo-Physical)** check box is cleared (see Loopback Mode on page 111).

From the **Test** menu, tap **Setup, Test Configurator**, and the Smart Loopback block.

Loopback

- **Mode** determines at which layer the Smart Loopback address/port swapping operation will be.
 - **Ethernet** swaps the MAC addresses of received packets having their **Destination MAC** address matching the MAC address of the loopback port.
 - **Ethernet (All Unicast)** swaps the MAC addresses of received packets having Unicast **Destination MAC** address.
 - **IP**, for Ethernet Layer 3 and 4, swaps the MAC and IP addresses of received packets having their **Destination IP** address matching the IP address of the loopback port. For Ethernet Layer 2, swaps the **MAC addresses** for packets having their **Destination MAC** address matching the MAC address of the loopback port.
 - **UDP/TCP** (default), for Ethernet Layer 4, swaps the UDP or TCP ports and the MAC and IP addresses of received packets having their **Destination IP** address matching the IP address of the loopback port. For Ethernet Layer 3, swaps the MAC and IP addresses for packets having their **Destination IP** address matching the IP address of the loopback port. For Ethernet Layer 2, swaps the **MAC addresses** for packets having their **Destination MAC** address matching the MAC address of the loopback port.
- **Matching & Swapping** indicates the Loopback parameters that will be used based on the Loopback Mode selected.

S-OAM Responder

The S-OAM Responder check box when selected (default) allows to respond to LBM, LTM, DMM, LMM, and SLM valid messages (test running or not). Traffic statistics are also monitored (refer to *Responder* on page 484).

Respond to... message	Respond with... message
LBM	LBR
LTM	LTR
DMM	DMR
LMM	LMR
SLM	SLR

Streams - Global

From the **Test** menu, tap **Setup, Test Configurator**, the protocol block, and the **Global** tab.

The following parameters are displayed and configurable per stream.

➤ Check boxes:

The first check box (top-left) allows to sequentially enable stream(s) within the limit of the link capacity.

The check boxes next to the stream numbers allow to enable each stream individually within the limit of the link capacity.

- **Stream Name**¹ indicates the name of each stream. Tap on the **Stream Name** button to modify the name of each stream.
- **Frame Size**¹ indicates the frame size of each stream. Tap on the **Frame Size** button to modify the frame size of each stream.
- **TX Rate**¹ indicates the transmission rate for each stream. Tap on the **TX Rate** button to modify the transmission rate (see page 287).
- **Framing** indicates the framing of each service. Tap on the **Framing** button to modify the **Frame Format, Network Layer, Transport Layer, VLAN**, and **MPLS** when applicable (see **Modify Frame Structure** from the *MAC/IP/UDP* on page 183).
- **VLAN** indicates the ID and Priority of each VLAN level for each stream. Tap on the **VLAN** button to modify the VLAN settings (see **VLAN** from the *MAC/IP/UDP* tab).

1. See the Profile tab for more information.

Test Setup - Test Configurator, Timer, and System

Streams - Global

- **Addressing MAC/IP** indicates the source and destination MAC/IP addresses for each stream. Tap on the **Addressing MAC/IP** button to modify the customer addressing (see **MAC** and **IP** from the **MAC/IP/UDP** tab). When using **Provider Encapsulation**, the source and destination addresses displayed are respectively EoE MAC for EoE and B-MAC for PBB-TE.

Batch button allows bulk configuration for stream addressing. Select the check box of each configuration parameter that needs to be copied and set its parameters. From **Apply To**, select all streams the copy applies to and tap on the **Copy From** to proceed.

The following parameters are global for all streams.

- **Total TX Rate** indicates the percentage of the total line utilization which is the TX rate sum of all enabled streams.
- **Link Capacity** indicates the total rate available for traffic generation.
- **Global Options:**
 - **Rate Unit** choices are % (default), **Mbit/s**, **Gbit/s**, **frame/s**, and **IFG**.
 - **QoS Metrics Tags Insertion** check box when selected (default) automatically adds a stream analysis tag containing Jitter, Latency, Throughput, and sequence tags in all frames that is generated.
- **Copy Stream** button allows to copy the stream configuration to one or several streams.

Select the stream number the configuration will be copied from.

From **To the following Streams**, select all streams that will inherit the configuration from the selected stream. An orange background represents a selected stream. A stream that is already enabled (Enable TX) cannot be selected for copy.

Tap **Copy** to confirm the stream configuration for all selected streams.

- **Restore Default** button reverts the current test application to its default factory settings.

Streams - Profile

The Traffic Gen & Mon test application supports the configuration of up to 16 different streams individually.

From the **Test** menu, tap **Setup**, **Test Configurator**, the protocol block, and the **Profile** tab.

Note: *All parameters are configurable per stream.*

Stream Selection and Activation

Select the stream to be configured by either using the left/right arrow or by tapping over the stream numbers area then tapping on a specific stream number. An orange background indicates the selected stream while a green background indicates the streams that are enabled.

- **Stream** associates a name to the selected stream number. Default stream names are **Stream 1** to **Stream n**.
- **Enable** check box when selected (cleared by default) enables the selected stream. However, the stream will be generated only when the test is started while the global **Enable TX** check box is selected from the **Global** tab.

Profile

- **Profile** button allows the selection and configuration of either **Voice**, **Video**, or **Data** (default) emulation profile. The selected profile icon and its Codec for Voice and Video are displayed next to the **Profile** button. Only **Data** is available when using **Provider Encapsulation**.

Voice when selected allows the configuration of the following parameters.

- **Voice Codec** allows the selection of the codec used by the voice profile: **VoIP G.711** (default), **VoIP G.723.1**, or **VoIP G.729**.
- **Number of Calls** allows the selection of the number of calls that will be generated for the selected stream. The minimum and default value is **1** for 10M to 1G interface, **5** for 10G, and **10** for 40G and 100G interfaces.
- **Rate** indicates the rate corresponding to the selected codec and the number of calls.

Video when selected allows the configuration of the following parameters.

- **Video Codec** allows the selection of the codec used by the video profile: **SDTV (MPEG-2)** - (default), **HDTV (MPEG-2)**, or **HDTV (MPEG-4)**.
- **Number of Channels** allows the selection of the number of channels (**1** by default) that will be generated for the selected stream.
- **Rate** indicates the rate corresponding to the selected coded and the number of channels.

- **Frame Size (Bytes)** for Data profile is selectable: **Fixed** (default), **Random**, or **Sweep**. The Frame Size is forced to **Fixed** for Voice and Video profiles. Only **Fixed** frame size is available when using **Provider Encapsulation**.
- For **Fixed** type, the frame size is as follow.

Profile	Codec	Frame Size	
		IPv4	IPv6
Voice	VoIP G.711	138	158
	VoIP G.723.1	82	102
	VoIP G.729	78	98
Video	All codec	1374	1394
Data	-	Programmable from 64 ^a to 16000	

- a. The minimum frame size will be adjusted according to the frame structure and components selected. The following table lists each component that may affect the minimum frame size value.

- For **Random** type, the frame size range is from 64 to 1518 bytes. However, the minimum frame size will be adjusted according to the frame structure and components selected. The following table lists each component that may affect the minimum frame size value. The maximum frame size value is also adjusted for VLAN (+4 bytes per VLAN).

- For **Sweep** type, the first frame is generated starting with the minimum number of bytes defined then each subsequent frame is incremented by 1 byte until the maximum number of bytes is reached and start over with minimum. The frame size range is from 64 to either 10000 bytes for electrical interfaces or 16000 bytes for optical interfaces; default is 1518 bytes. However, the minimum frame size will be adjusted according to the frame structure and components selected. The following table lists each component that may affect the minimum frame size value.

The following table lists each component that may affect the minimum frame size value.


Component	Description
VLAN	4 bytes per VLAN (up to 2 VLAN)
MPLS	4 bytes per label (up to two labels)
EoE Header	16 bytes
EoE VLAN	4 bytes
PBB-TE Header	18 bytes
B-VLAN	4 bytes
UDP	8 bytes
Ethernet Header	14 bytes
IPv4	20 bytes
IPv6	40 bytes

Shaping

- **TX Mode** allows the selection of the transmission mode for the selected stream when **Data** profile is selected. The TX Mode is forced to **Continuous** for Voice and Video profiles and when using **Provider Encapsulation**.


Continuous (default) transfers the selected frame continuously according to the selected percentage of bandwidth.

n-Frame transfers the selected number of frames.

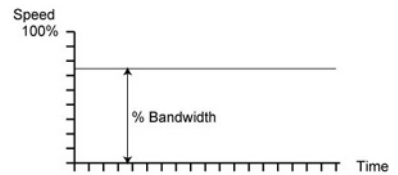


Burst transfers the selected frame at maximum bandwidth for the selected **Burst Duty Cycle** over the **Period**.

n-Burst transfers the selected number of Burst.

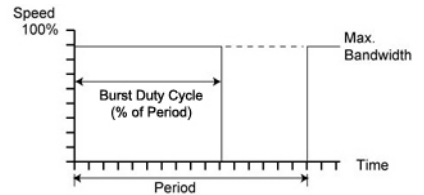

Ramp transfers the selected bandwidth in a stair shape according to the selected step time, number of steps, and maximum bandwidth.

n-Ramp transfers the selected number of Ramp.

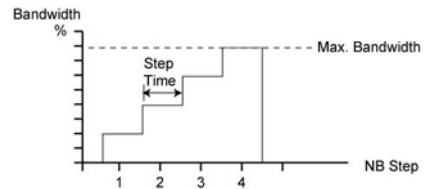

- **TX Rate / Max TX Rate** indicates the transmission rate for Voice and Video profiles, and allows to enter the transmission rate for Data profile. The available stream transmission rate will be calculated according to the selected TX Mode. The default setting is 100 percent for all interfaces at the exception of 10Gig-E WAN which is 92.8571 percent (depending on the frame format).

Unit choices are: **%** (default), **Mbit/s**, **Gbit/s**, **frame/s**, **IFG**. However **frame/s** and **IFG** are not available for **Random** and **Sweep** frame sizes.

Test Setup - Test Configurator, Timer, and System

Streams - Profile

- **Customer Frame TX Rate**, available when using **Provider Encapsulation**, indicates the customer frame TX rate based on the **TX Rate** defined.
- **Frame Count** is only available with n-Frame Transmit Mode. Enter the frame count number: **1** (default) to **267857142857**.
- **Shaping** button

For **Burst** and **n-Burst** TX modes.

- **Burst Duty Cycle (%)** represents the burst duration within the burst period: **1** to **100** percent (default is **50** percent).
- **Period** represents the burst pattern duration: **1** to **8000** milliseconds (default is **1000** ms).
Unit choices are **ms** (default) and **s**.
- **Burst Count**, available with n-Burst TX Mode, represents the number of times the burst will be repeated: **1** (default) to **255**.

For **Ramp** and **n-Ramp** TX modes.

- **Ramp Nb. of Steps** represents the number of steps within the ramp: **2** to **100** (default is **10**).
- **Step Time** represents the duration of each step: **100** to **8000** milliseconds (default is **1000** ms).
Unit choices are **ms** (default) and **s**.
- **Ramp Cycle Count**, available with n-Ramp TX mode only, represents the number of times the ramp will be repeated: **1** (default) to **255**.

- **Total TX Rate** indicates the percentage of the total line utilization which is the sum of all TX rate enabled streams.

Note: *The Individual stream can be enabled/disabled even when the test is started and running. The streams can be enabled one after the other, up to 16, as long as the maximum rate is not reached. For example, if the first stream is using the full rate available, then no other stream can be enabled. However, if the first enabled stream uses half rate, then at least another stream can be enabled using up to half rate. Thus, to enable a second stream, first set the TX rate value within the non-used rate, then enable it. A stream cannot be enabled if its MAC address is not valid (it can be either not resolved or wrongly entered).*

- **Link Capacity** indicates the total rate available for traffic generation.

QoS Metrics

Note: *QoS Metrics settings apply to all streams.*

- **Global Pass/Fail Verdict** check box when selected (default) enables the pass/fail verdict for all streams.
- **Global Thresholds Type** button
 - **Throughput** allows to select if the verdict is based on the **Current Throughput** (default) or **Average Throughput**.
 - **Frame Loss** allows to select if the verdict is based on a frame loss **Count** (default) or **Rate**.
 - **Out-of-Sequence** allows to select if the verdict is based on an Out-of-Sequence **Count** (default) or **Rate**.

Test Setup - Test Configurator, Timer, and System

Streams - Profile

- **Throughput (%)** check box when selected enables the throughput pass/fail verdict and allows to set the minimum and maximum threshold values.

Customer Frame Throughput. available when using **Provider Encapsulation**, displays the calculated customer frame throughput minimum and maximum thresholds based on the throughput values.

- **Frame Loss Count/Rate** check box when selected enables the Frame Loss pass/fail verdict and allows to set threshold of frame that are lost.

For **Count**, enter the maximum count of frame that are lost before declaring a fail verdict: **0** (default) to **9999999999**.

For **Rate**, enter the maximum rate of frame that are lost before declaring a fail verdict: **1.0E-14** (default) to **1.0E00**.

- **Out-of-Sequence Count/Rate** check box when selected enables the Out-of-Sequence pass/fail verdict and allows to set the threshold of frames that are Out-of-Sequence.

For **Count**, enter the maximum count of frames that are Out-of-Sequence before declaring a fail verdict: **0** (default) to **9999999999**.

For **Rate**, enter the maximum rate of frames that are Out-of-Sequence before declaring a fail verdict: **1.0E-14** (default) to **1.0E00**.

- **Jitter (ms)** check box when selected enables the Jitter verdict and allows to set the maximum Jitter in ms before declaring a fail verdict.
- **Latency (ms)** check box when selected enables the Latency verdict and allows to set the maximum Latency in ms before declaring a fail verdict.

SyncE

From the **Test** menu, tap **Setup, Test Configurator**, and the **SyncE** test block.

ESMC Monitoring

- **ESMC** (Ethernet Synchronization Message Channel) is a live value monitored even when the test is not started.

An arrow next to the ESMC label indicates that ESMC valid information frames are received or not.

- A green arrow indicates that at least one ESMC valid information frame, containing a valid FCS, was received within a second in the last 5-second interval.
- A red arrow indicates that no ESMC valid information frames were received for more than 5 seconds.
- A gray arrow indicates awaiting incoming data to provide a status.
- **Received QL** indicates the last Quality Level received. The **Received QL** is a live value monitored even when the test is not started.
- **QL Mismatch Monitoring** check box when selected (default) enables the Quality Level mismatch monitoring. The quality level characterizes the clock quality in terms of network synchronization.
- **Expected QL** available when the **QL Mismatch Monitoring** check box is selected, allows the selection of the Expected Quality Level value. See page 401 for more information.

- **Pass/Fail Verdict** check box when selected (default) enables the use of the pass/fail verdict. The global pass/fail verdict is based on the following criteria: **ESMC Rate Threshold** (when enabled), **QL Mismatch Monitoring** (when enabled), **ESMC Loss**, or **Link Down**.
- **ESMC Rate Threshold** check box when selected (default) enables the ESMC rate threshold monitoring which will declare a Fail verdict when the ESMC frame rate is outside the range of 0.8 to 10.2 frames/s.

ESMC Generation

- **Generated QL**

The **Generated QL** check box when selected (default) enables the generation of the selected QL message.

The **Generated QL** field allows the selection of the QL message that will be generated. See page 401 for the list of QL message (default is **QL-EEC2/ST3**).

Note: *For 1GE Electrical interface using **Local Clock** set to **Slave**, the **Generated QL** is not configurable and is set to **QL-DNU/DUS** with its check box selected.*

- **QL Rate (frame/s)** defines the frame rate at which the ESMC transmit the QL message value: **1** (default), **5**, or **10** frames per second. For 1GE Electrical interface using **Local Clock** set to **Slave**, the **QL Rate** is not configurable and is set to **1** frame/s.

Restore SyncE Defaults

Reverts the SyncE test application to its default factory settings.

System

From the **Test** menu, tap **Setup**, and **System**.

Factory Default

- **Restore Default** button restores the factory default settings for all test applications.
- **Restore Default at Start-Up** check box when cleared (default), reloads the last configuration settings when the application is launched; when selected, the factory settings are restored.

TCP Throughput

From the **Test** menu, tap **Setup**, **Test Configurator**, and tap on the test block.

TCP Mode

Since two units are required to perform a TCP Throughput test, one unit must be the source (**Local**) unit and the other one the destination (**Remote**). Set the TCP Mode on both units: **Local** (default) or **Remote**.

TCP Connection Configuration

- **Remote IP Address**, available with **Local** TCP mode, allows to enter the IP address of the remote unit.
- **Quick Ping** button automatically starts the quick Ping utility for the remote IP address and provides either a successful or failed result. The quick Ping uses 3 attempts, a Delay of 1 second, a Timeout of 2 seconds, and a Data Size of 32 Bytes. Refer to *Ping & Trace Route* on page 543 for more options.
- **Accept Connection from IP**, available with **Remote** TCP mode, allows to enter the IP address of the local unit. The IP address **0.0.0.0** (default) listens to any TCP stream.
- **IP TOS/DS**, available with **Local** TCP mode, is configurable from **0x00** (default) to **0xFF**.
- **TCP Port**, available with **Local** and **Remote** TCP modes, allows the selection of the TCP port number: **0** to **65535** (default is **50201**). For the local unit, the specified TCP port will be used for the TCP initialization algorithm with the remote unit. The following TCP segments sent by the local unit will use the TCP port number replied by the remote unit.

TCP Throughput Configuration

Note: *TCP Throughput Configuration is only available on the local unit.*

- **Initial Window Size**¹ is the window size that is used when the test is started: **1024** Bytes to **65536** KBytes (default is **2** KBytes). The Initial Window Size value must be between the **Minimum Window Size** and the **Maximum Window Size** values.
- **Minimum Window Size**¹ is the minimum window size used for the test: **1024** Bytes to **65536** KBytes (default is **1** KBytes).
- **Maximum Window Size**¹ is the maximum window size used for the test: **1024** Bytes to **65536** KBytes (default is **64** MBytes).
- **Rate Unit** allows to select the unit that will be used to set the Throughput Pass/Fail Verdict Threshold and throughput results: % (default) or **MBit/s**.
- **Throughput Pass/Fail Verdict** check box when selected (default) enables the throughput verdict.
- **Threshold** allows to set the pass/fail verdict threshold value: **0** to **100** % (default).

Restore TCP Throughput Defaults

Reverts the TCP Throughput test application to its default factory settings.

1. The entered value will be rounded to the closest multiple of 1024 Bytes. Unit choices are Bytes, KBytes (default), and MBytes.

Test Sequence (iOptics)

From the **Test** menu, tap **Setup**, and **Test Configurator**.

- **Power Threshold (W)** indicates the power consumption threshold based on the power level/class detected from the selected transceiver to declare the pass/fail verdict.
- **Temp. Threshold (°C)** allows to select the temperature threshold to declare the pass/fail verdict: **0** to **75 °C** (default is **70 °C**).
- **TX Power Range (dBm)** indicates the optical device TX operational range to declare the pass/fail verdict.
- **RX Power Range (dBm)** indicates the optical device RX operational range to declare the pass/fail verdict.
- **BERT Duration** is the time duration of the bit error test:
1 minute (default), **2, 3, 4, 5**, or **30 minutes**.
- **BERT Threshold** indicates the bit error test threshold (set to **0**) to declare the pass/fail verdict.
- **Skew Threshold (Bits)**, available with parallel interfaces, indicates the skew threshold to declare the pass/fail verdict: automatically set to either **928** or **1856** bits depending on the rate.
- **Power Consumption Pass/Fail Verdict** check box when selected (default) enables the power consumption pass/fail verdict based on the **Power Threshold (W)** value. In the case where a vendor optical devices overcomes the Power Class they are assigned to, clear this check box to avoid reporting a fail verdict.

Timer

Allows to automatically start and/or stop the test at a given time or for a specific duration.

From the **Test** menu, tap **Setup**, and **Timer**.

Timer

Note: *For RFC 2544 and RFC 6349, only **Start Time** and the **ARM** button are available.*

- **Duration:** Selects the test duration based on the test start time. The test start time can be either the time the user starts the test or the time the test is automatically started when the start time is enabled. The **Duration** check box has to be selected to be included in the test timer. Choices are **15 minutes** (default), **1, 2, 4, 6, 12, 24, 72 hours, 7 days**, and **User Defined**.

When **User Defined** is selected, the field next to it becomes available to enter the test duration using the format: dd:hh:mm:ss.

Note: *Duration cannot be enabled while stop time is enabled. When the test is started while duration is enabled, the stop time is calculated and the Stop Time field is updated to indicate the time the test will stop.*

- **Start Time** selects the time the test will automatically start. The **Start Time** check box has to be selected to be included in the test timer.

Note: *A valid start time has to be subsequent to the current time.*

Test Setup - Test Configurator, Timer, and System

Timer

- **Stop Time** selects the time the test will automatically stop. The **Stop Time** check box has to be selected to be included in the test timer.

Note: *A valid stop time has to be subsequent to the current time or to the start time, when enabled. The stop time must not exceed 30 days based on the start time. The stop time cannot be enabled while **Duration** is enabled.*

- **ARM** button, available when the **Start Time** check box is selected (cleared by default), enables the start test timer. Not available while the test is running. It is not possible to start the test case when the start time is armed.

Note: *An icon is displayed in the global test status area indicating that the timer is enabled. **Armed** is displayed when the test start time is armed while the test is not started. Refer to Global Indicator on page 27 for more information.*

Traces (OTN)

From the **Test** menu, tap **Setup, Test Configurator**, tap on the signal block, and on the **Traces** tab.

OTUx, ODUx, and TCM Buttons

Tap on either OTUx or ODUx button. For ODUx when TCM is enabled (see **Modify TCM** on page 274), tap on a TCMx button to select a TCM level.

SM/PM/TCM TTI Traces

Note: *The TTI Traces are configurable for SM (OTUx), PM (ODUx), and TCM (ODUx when TCM is enabled; see **Modify TCM** on page 274).*

➤ **Generated Message**

Allows editing the SAPI, DAPI and Operator Specific messages to be generated.

➤ **Expected Message**

Allows editing the expected SAPI, and DAPI messages. The expected message settings are coupled with the **Expected Message** from *Traces - OTN* on page 474.

Test Setup - Test Configurator, Timer, and System

Traces (OTN)

- **SAPI** (Source Access Point Identifier) corresponds to the TTI bytes 0 to 15. A maximum of 16 characters is allowed. NULL (all 0's) characters are automatically appended to the message for bytes that are not defined. The expected SAPI message is available when the **SAPI OTU/ODU-TIM** check box is selected.

TTI Traces	Default Message ^a
SM	EXFO OTU SAPI
PM	EXFO ODU SAPI
TCM	EXFO TCMi SAPI

- a. The default message contains a NULL (all 0's) character preceding it. NULL (all 0's) characters are automatically appended to the message for bytes that are not defined.

- **DAPI** (Destination Access point Identifier) corresponds to the TTI bytes 16 to 31. A maximum of 16 characters is allowed. NULL (all 0's) characters are automatically appended to the message for bytes that are not defined. The expected DAPI message is available when the **DAPI OTU/ODU-TIM** check box is selected.

TTI Traces	Default Message ^a
SM	EXFO OTU DAPI
PM	EXFO ODU DAPI
TCM	EXFO TCMi DAPI

- a. The default message contains a NULL (all 0's) character preceding it. NULL (all 0's) characters are automatically appended to the message for bytes that are not defined.

- **Operator Specific** corresponds to the TTI bytes 32 to 63. A maximum of 32 characters are allowed. NULL (all 0's) characters are automatically appended to the message for bytes that are not defined.

TTI Traces	Default Message ^a
SM	EXFO OTU OPERATOR SPECIFIC
PM	EXFO ODU OPERATOR SPECIFIC
TCM	EXFO TCMi OPERATOR SPECIFIC

- a. NULL (all 0's) characters are automatically appended to the message for bytes that are not defined.
- **SAPI OTU/ODU/TCM-TIM** check box, when selected (cleared by default), allows editing the expected Source Access Point Identifier (SAPI) and also enables OTU/ODU/TCM-TIM alarm monitoring.
 - **DAPI OTU/ODU/TCM-TIM** check box, when selected (cleared by default), allows editing the expected Destination Access Point Identifier (SAPI) and also enables the OTU/ODU/TCM-TIM alarm monitoring.

Traces (SONET/SDH)

From the **Test** menu, tap **Setup, Test Configurator**, the interface block, and on the **Traces** tab.

Note: *Selecting a Trace byte to be generated will automatically update the corresponding OH byte. Refer to OH - SONET/SDH on page 529 for more information.*

Traces

➤ **Section/RS (J0), STS/AU/TU-3 Path (J1), and VT/TU Path (J2)**

Format: Allows the selections of the J0/J1/J2 format: **1 Byte** (default), **16 Bytes**, or **64 Bytes** format.

Generated: When the 16 bytes or 64 bytes format is selected, enter the J0/J1/J2 trace value/message to be generated.

Default values/messages

Format (bytes)	Traces	J0/J1/J2
1	01 ^a	J0/J1/J2
16	EXFO SONET/SDH	J0/J1/J2
64	EXFO SONET/SDH Analyzer Section/RS trace test message	J0
	EXFO SONET/SDH Analyzer high order path trace test message	J1 (STS/AU)
	EXFO SONET/SDH Analyzer low order path trace test message	J1 (TU-3)/J2

a. Hexadecimal value. Refer to OH - SONET/SDH on page 529 to change this value.

Note: 16-bytes selection allows typing up to 15 bytes (a CRC-7 byte will be added in front for a total of 16 bytes). 64-bytes selection allows typing up to 62-bytes ($\langle C_R \rangle$ and $\langle L_F \rangle$ bytes will be added at the end for a total of 64-bytes). Traces values should be ASCII suitable characters including the ITU T.50 Characters on page 36.

- **TIM-S/RS-TIM, TIM-P/HP-TIM, TIM-V/LP-TIM:** Enables the corresponding Trace Identifier Mismatch for the expected message defined. These settings are coupled with the *Result - Traces/Labels* configuration (refer to *Traces - SONET/SDH* on page 476).

Format: Allows the selection of the expected format:

16 Bytes (default), or **64 Bytes**.

Expected: Allows entering the expected J0 trace message for TIM-S/RS-TIM, J1 for TIM-P/HP-TIM, and J2 for TIM-V/LP-TIM. See *Default values/messages* on page 302.

TCM Access Point Identifier

Note: Available when TCM is enabled from the Signal - Signal Configuration (SONET/SDH) on page 275.

- **STS/AU Path (N1), and VT/TU Path (Z6 or N1 (TU-3))**
Enter the N1/Z6 value/message to be generated.
- **TC-TIM-P/HPTC-TIM/TC-TIM-V/LPTC-TIM:** Enables the corresponding TCM Access Point Identifier for the expected message defined. These settings are coupled with the Traces configuration from *Traces - SONET/SDH* on page 476.

9 Test Results

The Test Results menu offers the following structure:

Intelligent Apps test applications

Tab	Test Application		Page
	iOptics	iSAM	
Logger	X	X	384
Summary	440	442	<---

Transport test applications

Tab	Available with						Page
	a	b	c	d	e	f	
Alarms/Errors	X	X	X	X	-	X	310
Alarms/Errors Logger	-	-	-	-	-	X	384
FTFL/PT	X	-	-	-	-	-	371
ISDN Logger	-	-	-	-	-	X	374
Labels	-	X	-	X	-	-	379
Logger	X	X	X	X	X	-	384
OTL-SDT	X	-	-	-	-	-	387
Performance Monitoring	X	X	X	X	-	-	389
Summary	417	417	417	417	454	446	<---
Traces	474	476	-	476	-	-	<---

- a. OTN BERT
- b. SONET/SDH BERT
- c. DS_n/PDH BERT
- d. SONET/SDH - DS_n/PDH BERT
- e. NI/CSU Emulation
- f. ISDN PRI

Test Results

Ethernet test applications

Tab - Subtab	Test Application										Page
	a	b	c	d	e	f	g	h	i	j	
Alarms/Errors	X	X	X	X	X	X	X	X	X	-	310
Graph	-	-	X	-	-	-	-	-	-	-	373
Link OAM	-	-	-	-	-	-	-	-	X	-	380
Logger	X	X	X	X	X	-	X	X	X	-	384
S-OAM / MPLS-TP OAM	-	-	-	-	-	-	-	-	X	-	404
Service Configuration - Burst	X	-	-	-	-	-	-	-	-	-	409
Service Configuration - Ramp	X	-	-	-	-	-	-	-	-	-	410
Service Performance	X	-	-	-	-	-	-	-	-	-	412
Streams - Frame Loss / Out-of-Sequence	-	-	-	-	X	-	-	-	-	-	414
Streams - Jitter	-	-	-	-	X	-	-	-	-	-	414
Streams - Latency	-	-	-	-	X	-	-	-	-	-	415
Streams - MPLS	-	-	-	-	X	-	-	-	-	-	386
Streams - Throughput	-	-	-	-	X	-	-	-	-	-	416
Summary	434	458	455	417	472	417	417	469	452 461	428	<---
Traffic - Ethernet	X	X	X	X	X	X	X	X	X	-	477
Traffic - Flow Control	-	X	X	-	X	-	X	X	X	-	480
Traffic - Graph	-	-	-	-	X	-	X	-	-	-	482
Traffic - MPLS	-	-	-	-	-	-	X	-	-	-	386
Traffic - S-OAM / MPLS-TP OAM	-	-	-	-	-	X	-	-	X	-	483
Window Sweep	-	X	-	-	-	-	-	-	-	-	485
WIS	X	-	X	X	X	X	-	-	X	-	486

- a. EtherSAM
- b. RFC 6349
- c. RFC 2544
- d. EtherBERT
- e. Traffic Gen & Mon
- f. Smart Loopback
- g. Through Mode
- h. TCP Throughput
- i. Carrier Ethernet OAM
- j. Cable Test

Packet Sync test applications

Tab	Test Application		Page
	1588 PTP	SyncE	
Alarms/Errors	X	X	310
Logger	X	X	384
PTP Stats	X	-	396
Quality Level (1588 PTP)	X	-	398
Quality Level (SyncE)	-	X	401
Summary	423	466	<---
Traffic - Ethernet	X	X	477

Fibre Channel test application

Tab	Test Application Fibre Channel BERT	Page
Alarms/Errors	X	310
Logger	X	384
Summary	X	437

Wireless Test Application

Tab	Test Application CPRI/OBSAI BERT	Page
Alarms/Errors	X ^a	310
Logger	X	384
Summary	X	417

a. Only available for Framed L2.

Alarms/Errors Overview

Current and history alarms/errors are displayed using different background colors as defined in the following table.

Background color	Alarm/Error	Description
Gray	Current	No test result available.
	History	
Green	Current	No alarm/error has occurred in the last second.
	History	No alarm/error has occurred during the test.
Red	Current	An alarm/error occurred in the last second.
	History	
Amber	History	At least one alarm/error has occurred during the test.



- **Seconds** gives the total number of seconds in which one or more alarm/error occurred.
- **Count** gives the number of occurrences of a specific error. The count is displayed using integer value; exponential value (for example: 1.00000E10) is used when the count is bigger than the field display capacity.
- **Rate** calculates and displays the error rate. The rate is expressed using the exponential format with two decimal digits (example: 1.23E-04).

Note: Some Alarms/errors groups display a magnifying icon allowing to see more information on alarm/error like Second, Count, and Rate information.

Pass/Fail Verdict

Note: The verdict is not displayed when disabled or unavailable.

The Pass/Fail verdict is represented by the following icons:

Icon	Verdict	Description
	PASS	Result value meet the configured threshold criterion.
	FAIL	Result value does not meet the configured threshold criterion.

Statistic Values

- **Current** indicates the average measurements in the last second.
- **Last** indicates the result of the last measurement.
- **Minimum** indicates the minimum value recorded.
- **Maximum** indicates the maximum value recorded.
- **Average** indicates the average value.

P1 and P2 Buttons

The **P1** and **P2** buttons, available with **Dual Port** topology, allow to respectively display the alarms/errors for port #1 (**P1**) or port #2 (**P2**).

Alarms/Errors

From the **Test** menu, tap **Results**, and the **Alarms/Errors** tab. Depending on the test structure, the Alarms/Errors page may be split in different tabs such as OTN and Ethernet; tap on the desired tab when required.

Alarms/errors blocks containing the magnifier (+) icon in its title, opens a zoomed view giving more details like alarms/errors for each lane (parallel interface), errors in seconds, count, and rate.

When there is not enough room on the page to display the error in seconds, count, and rate, the error is displayed in **Seconds** per default. To select another unit, tap on the unit's button and select either **Seconds** (default), **Count**, or **Rate**.

Total, available with certain errors (parallel interface), indicates the total of all lanes when **Count** or **Rate** unit is selected.

The following table lists the availability of alarms/errors per layer for TX and RX.

Layer	Alarms/Errors		Page
	TX/RX	RX only	
BER	Pattern Loss	No Traffic	314
	Bit Error, Pattern Error	Mismatch '0', Mismatch '1', Frame Loss, Out-of-Seq.	
CLOCK	-	LOC, LOPPS-L, LOPPS-R	315
CPRI	LOF, R-LOS, R-LOF, RAI, SDI	Link Down	316
	FAS	-	
DS1	AIS, OOF, RAI	-	317
	CRC-6, Framing Bit	-	
DS3	AIS, Idle, OOF, RDI	-	318
	CP-BIT, FEBE, F-Bit, P-Bit	-	
E1	AIS, LOF, RAI, LOMF, RAI MF, TS16 AIS	-	319
	FAS	CRC-4, E-Bit	
E2	AIS, LOF, RAI	-	321
E3	FAS	-	322
E4			323
Ethernet	Link Down, Remote Fault, Local Fault ^a	Hi-BER, Local Fault Det., Local Fault Rcd.	324
	FCS	Jabber, Oversize, Runt, Undersize	
Ethernet - PCS Lanes / PCS	-	LOA, Inv. Mapping, LOBL, LOAML, Exc. Skew	327
	Block, Inv. Marker, PCS BIP-8	-	
FEC	CORR-BIT, CORR-CW, CORR-SYM, STRESS, UNCORR-CW	CORR, UNCORR	342
Fibre Channel	-	Link Down, Local Fault Detected, Local Fault Received, Remote Fault	329
	-	Symbol, Block, FCS, Oversize, Undersize	
Interface	LOS, CV, K30.7	LOC Lane, Frequency, LOC	331
IP/UDP/TCP	-	IP Chksum, UDP Chksum, TCP Chksum	334
ISDN	-	D-CH Down, D-Ch FCS	334

Test Results

Alarms/Errors

Layer	Alarms/Errors		Page
	TX/RX	RX only	
MPLS-TP OAM	RDI, AIS, LCK, C-LOS, C-FDI, C-RDI, C-DCI ^a	Loss Continuity, Mismerge, Unexp MEG Lvl, Unexp MEP, Unexp Period	349
ODUx	AIS, OCI, LCK, BDI, FSF, BSF, FSD, BSD	TIM	335
	BEI, BIP-8	-	
ODUx-TCM	BDI, BIAE, IAE, LTC	TIM	338
	BEI, BIP-8	-	
OPUx	AIS, CSF	PLM	340
OTL	LOF, LOL, LOR, OOF, OOR	Exc. Skew	341
	FAS, Inv. Marker	-	
OTUx	AIS, BDI, BIAE, IAE, LOF, LOM, OOF, OOM	TIM	342
	FAS, MFAS, BIP-8, BEI	-	
PTP	-	Loss Sync, Loss Announce, Unusable, Domain Mismatch, QL Mismatch	346
QoS Metrics	-	Frame Loss, Out-of-Seq.	347
RS-FEC	-	FEC-LOA, FEC-LOAML	348
	-	FEC-CORR-CW, FEC-UNCORR-CW, FEC-SYMB	
S-OAM	RDI, AIS, LCK, C-LOS, C-FDI, C-RDI, C-DCI ^a	Loss Continuity, Mismerge, Unexp MEG Lvl, Unexp MEP, Unexp Period	349
Section/Line / RS/MS	LOF-S/RS-LOF, SEF/RS-OOF, AIS-L/MS-AIS, RDI-L/MS-RDI	TIM-S/RS-TIM	353
	FAS-S/RS-FAS, B1, B2, REI-L/MS-REI	-	
STS-x / AU-x	AIS-P/AU-AIS, LOP-P/AU-LOP, UNEQ-P/HP-UNEQ, PDI-P, RDI-P/HP-RDI, ERDI-PCD/ERDI-CD, ERDI-PPD/ERDI-PD, ERDI-PSD/ERDI-SD	TIM-P/HP-TIM, PLM-P/HP-PLM	355
	B3, REI-P/HP-REI	-	
SyncE	-	ESMC, QL Mismatch	358

Layer	Alarms/Errors		Page
	TX/RX	RX only	
TCM (SONET/SDH)	TC-UNEQ-P/HPTC-UNEQ, TC-LTC-P/HPTC-LTC, TC-IAIS-P/HPTC-IAIS, TC-ODI-P/HPTC-ODI, TC-RDI-P/HPTC-RDI, TC-UNEQ-V/LPTC-UNEQ, TC-LTC-V/LPTC-LTC, TC-IAIS-V/LPTC-IAIS, TC-ODI-V/LPTC-ODI, TC-RDI-V/LPTC-RDI	TC-TIM-P/HPTC-TIM, TC-TIM-V/LPTC-TIM	359
	TC-IEC-P/HPTC-IEC, TC-OEI-P/HPTC-OEI, TC-REI-P/HPTC-REI, TC-OEI-V/LPTC-OEI, TC-REI-V/LPTC-REI	TC-VIOL-P/HPTC-VIOL, TC-VIOL-V/LPTC-VIOL	
VT/TU	AIS-V/TU-AIS, LOP-V/TU-LOP, RDI-V/LP-RDI, RFI-V/LP-RFI, UNEQ-V/LP-UNEQ, ERDI-VSD/LP-ERDI-SD, ERDI-VCD/LP-ERDI-CD, ERDI-VPD/LP-ERDI-PD	TIM-V/LP-TIM, PLM-V/LP-PLM	362
	-	BIP-2, REI-V/LP-REI	
WIS	SEF, LOP, AIS-L, RDI-L, AIS-P, RDI-P, LCD-P, LOP-P, UNEQ-P, ERDI-PSD, ERDI-PCD, ERDI-PPD	WIS Link Down, PLM-P	365

a. Available in TX only.

BER

Alarms

- **No Traffic** (Available with EtherBERT)

RX:

Ethernet: No pattern traffic has been received in the last second.

Fibre Channel: No traffic is being transmitted when Login Management fails; a pop up displays **No Data is being transmitted on Port(s) <port number>. The Login process has failed.**

- **Pattern Loss**

RX:

Ethernet: More than 20 percent of bit errors are received or the reference sequence can be unambiguously identified as out of phase.

Fibre Channel: bit error is detected on four consecutive words.

Errors

- **Bit Error**

RX: There are logic errors in the bit stream (i.e., zeros that should be ones and vice versa).

- **Pattern Error**

RX: Indicates a block mismatch. Only available with **Seed A** or **Seed B** pattern.

- **Mismatch '0'** (Available with EtherBERT)

RX: There is a bit error on a binary '0' (for example ones that should be zeros) found in the test pattern only.

- **Mismatch '1'** (Available with EtherBERT)

RX: There is a bit error on a binary '1' (for example zeros that should be ones) found in the test pattern only.

Clock

➤ **LOC** (Loss Of Clock)

RX: The NetBlazer V2 Series is unable to synchronize with the selected **Clock Mode**. No valid clock is generated/extracted to/from the EXT CLK port.

➤ **LOPPS-L** and **LOPPS-R** (Loss Of Pulse Per Second - Local/Remote) is only available with **Dual Test Set** in **One-Way Latency** measurement mode.

RX: Either no pulse is received or no pulse is received within 1 second $\pm 6.6 \mu s$ after the previous pulse. **LOPPS-R** is only monitored once the DTS connection is established.

CPRI

Note: CPRI alarms/errors are only available for Framed L2.

Alarms

➤ **Link Down**

RX: Indicates that the start-up sequence is not in F (Operation) or G (Passive) link state.

➤ **LOF** (Loss Of Frame)

RX: The hyperframe alignment cannot be achieved or is lost.

➤ **R-LOS** (Remote - Loss Of Signal)

RX: Bit 3 of the Z.130.0 byte is set to 1.

➤ **R-LOF** (Remote - Loss Of Frame)

RX: Bit 4 of the Z.130.0 byte is set to 1.

➤ **RAI** (Remote Alarm Indication)

RX: Bit 1 of the Z.130.0 byte is set to 1.

➤ **SDI** (Service Access Point Defect Indication)

RX: Bit 2 of the Z.130.0 byte is set to 1.

Errors

➤ **FAS** (Frame Alignment Signal)

RX: Error detected in the start of hyperframe (byte different of K28.5 while not in LOF).

DS1

Alarms

➤ **AIS** (Alarm Indication Signal)

RX: An unframed all-ones signal is received.

➤ **OOF** (Out-OF-Frame)

RX: Four consecutive frame bit errors are detected.

➤ **RAI** (Yellow) (Remote Alarm Indication)

RX:

SF framing: Bit 2 in each timeslot contains “0”.

ESF framing: Eight “ones” followed by eight “zeros” pattern is received continuously in the data link (FDL).

Errors

➤ **Framing Bit**

RX: An incorrect value appeared in a bit position reserved for framing.

➤ **CRC-6** (Cyclical Redundancy Check) is only available with ESF framing.

RX: One or more bit errors have been detected in a block of data through cyclical redundancy check.

DS3

Alarms

➤ **AIS** (Alarm Indication Signal)

RX: The M-frame contains zeros (0) for C-bits, ones (1) for X-bits, 1010... repeating sequence with a one (1) immediately following any of the control bit positions for the information bits.

➤ **Idle** (DS3 Idle)

RX: Subframe 3 of the M-frame contains zeros (0) for the three C-bits, ones (1) for X-bits, 1100... repeating sequence with the first two bits following each control bit set to 11 for the information bits.

➤ **OOF** (Out-Of-Frame)

RX: Four consecutive frame bit errors are detected.

➤ **RDI** (Remote Defect Indicator)

RX: Both X-bits of the M-Frame are set to “0”.

Errors

➤ **CP-Bit** (Control-Bit)

RX: The three C-bits reserved to control bit stuffing are different of “111” and “000”.

➤ **F-Bit** (Framing-Bit)

RX: The frame alignment pattern received is different of “1001”.

➤ **P-Bit** (Parity-Bit)

RX: The P-Bits does not match the parity of all the information bits following the first X-Bit of the previous DS3 frame.

➤ **FEBE** (Far-End Block Error)

RX: The three FEBE bits reserved for framing or parity error detection contain the “000” pattern.

E1

Alarms

Note: *Only AIS is available when the framing is set to **Unframed**.*

- **AIS** (Alarm Indication Signal)
RX: An unframed all-ones signal is received.
- **LOF** (Loss Of Frame)
RX: Three consecutive incorrect frame alignment signals is received.
- **RAI** (Yellow) (Remote Alarm Indication)
RX: Bit 3 in timeslot 0 is set to “1”.
- **TS16 AIS** (TimeSlot 16 Alarm Indication Signal)
RX: Timeslot 16 is received as all-ones for all frames of two consecutive multiframes.
- **LOMF** (Loss Of MultiFrame)
RX: Two consecutive multiframes alignment signals (bits 1 through 4 of TS16 of frame 0) is received with an error.
- **RAI MF** (Remote Alarm Indication Multi-Frame)
RX: Bit 6 of timeslot 16 of frame 0 is set to “1”.

Test Results

Alarms/Errors

Errors

- **FAS** (Frame Alignment Signal) is only available with **PCM30 CRC-4** or **PCM31 CRC-4** framing.

RX: Bits 2 to 8 of the frame containing the FAS differ from 0011011.

- **CRC-4** (Cyclical Redundancy Check)

RX: One or more bit errors are detected in a block of data through cyclical redundancy check.

- **E-Bit** (CRC-4 Error Signal) is only available with **PCM30 CRC-4** or **PCM31 CRC-4** framing.

RX: Bit 1 of sub-multiframe (SMF) II in frame 13 and/or 15 is set to 0 indicating a sub-multiframe error.

E2

Alarms

Note: *Only AIS is available when the framing is set to Unframed.*

➤ **AIS** (Alarm Indication Signal)

RX: An unframed all-ones signal is received.

➤ **LOF** (Loss Of Frame)

RX: Four consecutive incorrect frame alignment signals is received.

➤ **RAI** (Remote Alarm Indication)

RX: Bit 11 of a framed E2 is set to “1”.

Errors

➤ **FAS** (Frame Alignment Signal)

RX: Bits 1 to 10 of the first frame differ from 1111010000.

Test Results

Alarms/Errors

E3

Alarms

Note: Only AIS is available when the framing is set to Unframed.

- **AIS** (Alarm Indication Signal)
RX: An unframed all-ones signal is received.
- **LOF** (Loss Of Frame)
RX: Four consecutive incorrect frame alignment signals is received.
- **RAI** (Remote Alarm Indication)
RX: Bit 11 of a framed E3 is set to “1”.

Errors

- **FAS** (Frame Alignment Signal)
RX: Bits 1 to 10 of the first frame differ from 1111010000.

E4

Alarms

Note: *Only AIS is available when the framing is set to Unframed.*

➤ **AIS** (Alarm Indication Signal)

RX: An unframed all-ones signal is received.

➤ **LOF** (Loss Of Frame)

RX: Four consecutive incorrect frame alignment signals is received.

➤ **RAI** (Remote Alarm Indication)

RX: Bit 13 of a framed E4 is set to “1”.

Errors

➤ **FAS** (Frame Alignment Signal)

RX: Bits 1 to 12 of the first frame differ from 111110100000.

Ethernet

Alarms

➤ Link Down

RX: For 40 Gbit/s and 100 Gbit/s: There are alarms at the PCS level. For 10 Mbit/s to 10 Gbit/s: The Ethernet connection is down meaning that there is a local or a remote fault condition.

➤ Local Fault Det.¹ (Local Fault Detected)

RX: At least one of the following events is detected: Loss of bit synchronization, Loss of Block synchronization, WIS Link down, or High BER.

➤ Local Fault Rcd.¹ (Local Fault Received)

RX: The received data path contains the **Local Fault** signal.

➤ Remote Fault¹

RX: The received data path contains the **Remote Fault** status.

➤ Hi-BER (High-Bit Error Ratio) - (Available with 40GE/100GE interface)

RX: The bit error ratio is $> 10^{-4}$ on a fixed time period; 1250 μ s for 40G, and 500 μ s for 100G.

1. Available with Ethernet 10/40/100 Gbit/s interface.

Errors**➤ Symbol¹**

RX/TX: Invalid code-group is detected/generated in the code.

➤ Idle¹

RX: An error is detected between the end of a frame and the beginning of the next frame.

➤ False Carrier¹

RX: Data is being received with invalid start of frame.

➤ Block (available with Ethernet 10G LAN/WAN interface)

RX: Error block received in frames.

➤ Alignment (available with 10/100 Mbit/s interface)

RX: Frames without an integral number of octets in length are received.

➤ FCS (Frame Check Sequence)

RX: Frames with an invalid FCS are received.

➤ Jabber

RX: Frames larger than 1518 bytes² with an invalid FCS are received; 1534 bytes³ for EoE; 1536 bytes⁴ for PBB-TE.

➤ Oversize (available when the **Oversize Monitoring** check box is selected.)

RX: Frames larger than 1518 bytes² with a valid FCS; 1534 bytes³ for EoE; 1536 bytes⁴ for PBB-TE.

1. Available with Ethernet 100/1000 Mbit/s interface.

2. Add 4 bytes to this value for each VLAN layer enabled.

3. Add 4 bytes to this value for each VLAN layer enabled in the encapsulated Ethernet payload and 4 bytes for EoE VLAN when enabled.

4. Add 4 bytes to this value for each VLAN layer enabled in the encapsulated Ethernet payload and 4 bytes for B-VLAN when enabled.

Test Results

Alarms/Errors

➤ **Runt**

RX: Frames smaller than 64 bytes with an invalid FCS; 80 bytes for EoE; 82 bytes for PBB-TE.

➤ **Undersize**

RX: Frames smaller than 64 bytes with a valid FCS; 80 bytes for EoE; 82 bytes for PBB-TE.

➤ **Oversize Monitoring** check box, when selected (cleared by default), allows monitoring the **Oversize** frame errors.

The following errors are only available with **Half Duplex** mode (only for electrical interface at speeds of 10 Mbit/s and 100 Mbit/s).

➤ **Collision**

RX: Indicates the number of collisions on the link.

➤ **Late Coll.**

RX: Indicates the number of collisions that have occurred after a 64 bytes transmission.

➤ **Exc. Coll.**

RX: Indicates the number of frames that were sent 16 times unsuccessfully due to consecutive collisions.

Ethernet - PCS Lanes / PCS

Note: Available with parallel interface only: 40/100 Gbit/s Ethernet. Available under the **PCS** sub tab for Through Mode test providing alarms/errors for both ports.

- **Skew Alarm Threshold (bits)**, available with Ethernet test application, allows to set the threshold value that will be used to declare a skew alarm. The default value is 928 for 100G and 1856 for 40 G.
- **Default** restore the default skew alarm threshold value.

Alarms

- **LOA (Loss Of Alignment)**
RX: Two or more logical lanes have the same logical lane marker value, or one or more logical lane marker recovery processes are in the OOR state, or if the differential delay between two logical lanes exceeds the configured alarm threshold compensable delay.
- **Inv. Mapping (Invalid Mapping)**
RX: Indicates errors in the mapping attributed to either a mapping value appearing more than once or a non valid mapping value (out of range).
- **LOBL (Loss of Block Lock)**
RX: In lock mode, 65 invalid sync fields (00 or 11) within a 1024 sync window are received. A PCS Lane Lock alarm is cleared when receiving 64 consecutive valid 66b sync field (01 or 10) in a row.

Test Results

Alarms/Errors

➤ **LOAML** (Loss of Alignment Marker Lock)

RX: In lock mode, four consecutive marker values are received that do not match the alignment marker that the lane is currently locked to. The LOAML alarm is cleared when the PCS Lane is declared Lock and two valid alignment markers 16384 blocks (66b) apart are received.

➤ **Exc. Skew** (Excessive Skew)

RX: The skew exceeds the defined threshold (see *Skew Alarm Threshold (bits)* on page 145).

Errors

➤ **Block** is available with Ethernet test applications Injection is not available when the RS-FEC check box is selected.

RX: Invalid 64b/66b block code are received. An invalid 64b/66b block is declared when the synchronization field has a value of 00 or 11.

➤ **Inv. Marker** (Invalid Marker): Injection is not available when the RS-FEC check box is selected.

RX: There are errors in the 66-bit block alignment marker.

➤ **PCS BIP-8**

RX: There are PCS lane bit-interleave parity error. A routine even-parity check is performed over all bits of a PCS lane, from and including the previous alignment marker, but not including the current alignment marker.

➤ **PCS BIP-8 Mask** is available with 40GbE over OTU3 test.

RX: At the OTN ingress, the calculated 8-bit error mask contains at least one bit set to “1”.

➤ **OTN BIP-8** is available with 40GbE over OTU3 test

RX: Indicates for each lane that at the OTN egress, the calculated 8-bit error contains at least one bit set to “1”.

Fibre Channel

Alarms

➤ **Link Down**

RX: The Fibre Channel connection is down meaning that there is a local or a remote fault condition.

➤ **Local Fault Detected (FC 10X)**

RX: Indicates that at least one of the following events is detected: **LOS**, **Loss of bit synchronization**, **Loss of Block synchronization**, **Link down**, or **High BER** (High BER is true when the bit error ratio $> 10^{-4}$ on a fixed 125 μs time period).

➤ **Local Fault Received (FC 10X)**

RX: Indicates that the received data path contains the Local Fault signal.

➤ **Remote Fault (FC 10X)**

RX: Indicates that a Remote Fault event is detected.

Test Results

Alarms/Errors

Error

➤ **Symbol** (FC 1X/2X/4X/8X)

RX/TX: Invalid code-group is detected/generated in the code.

➤ **Block** (FC 10X/16X)

RX: The number of frames received with an errored block condition.

➤ **FCS** (Frame Check Sequence)

RX: Frames with an invalid FCS are received.

➤ **Oversize**

RX: The number of received FL-2 frames larger than 2148 bytes with a valid FCS.

➤ **Undersize**

RX: FL-2 frames smaller than 36 bytes with a valid FCS.

Interface

Alarms

➤ **LOS** (Loss Of Signal)

RX: Absence of an input signal or an all-zeros pattern is received.
Available for each Optical Lane for parallel interface.

For CPRI Framed L2: Absence of an input signal or at least 16
8B/10B code violations occur in one hyperframe.

➤ **LOC Lane** (Loss Of Clock Lane) is available for each Physical Lane for parallel interface

RX: The module is unable to lock on the Physical/CAUI/CAUI-4/XLAUI link interface.

➤ **Frequency** (available for each Physical Lane for parallel interface). Not available when using an active copper SFP.

RX: The received signal frequency meets the standard specifications (green) or not (red).

For Ethernet **10/100/1000M Electrical, 100M Optical, 1GE Optical, 10GE LAN/WAN**, or Fibre Channel **1X/2X/4X/8X/10X/16X** interface/rate, the frequency range is ± 100 ppm.

For parallel interfaces:

Rate	Optic Type	Frequency
40GE	4x10G	10.3125 Gbit/s ± 100 ppm
OTU3	4x10G	10.7546 Gbit/s ± 20 ppm
OTU3e1	4x10G	11.1427 Gbit/s ± 20 ppm
OTU3e2	4x10G	11.1458 Gbit/s ± 20 ppm
100GE	4 x 25G	10.3125 Gbit/s ± 100 ppm
OTU4	4 x 25G	11.181 Gbit/s ± 20 ppm

Test Results

Alarms/Errors

For serial interfaces:

Interface	Standard Rate Specification
DS1	1544000 \pm 36.6 ppm
E1	2048000 \pm 54.6 ppm
E3	34368000 \pm 24.6 ppm
DS3	44736000 \pm 24.6 ppm
STS-1e/STM-0e, OC-1/STM-0	51840000 \pm 20 ppm
E4	139264000 \pm 19.6 ppm
STS-3e/STM-1e, OC-3/STM-1	155520000 \pm 20 ppm
OC-12/STM-4	622080000 \pm 20 ppm
OC-48/STM-16	2488320000 \pm 20 ppm
OTU1	2666057143 \pm 20 ppm
OC-192/STM-64	9953280000 \pm 20 ppm
OTU2	10709225316 \pm 20 ppm
OTU1e	11049107143 \pm 100 ppm
OTU2e	11095727848 \pm 100 ppm
OTU1f	11270089286 \pm 100 ppm
OTU2f	11317642405 \pm 100 ppm

Error

- **BPV** (Bipolar Violation), available with DS1 and DS3, pulses of the same consecutive polarity were detected, in violation with the bipolar signal format.
- **BPV/CV** (Bipolar Violation/Code Violation), available with STS-1e and STS-3e, pulses of the same consecutive polarity were detected, in violation with the bipolar signal format.
- **CV** (Code Violation)

For E1, E3, E4, STM-0e, and STM-1e: Pulses of the same consecutive polarity were detected, in violation with the bipolar signal format.

For CPRI Framed L2: Invalid 10B code word received.
- **K30.7**, for CPRI Framed L2, code word /V/ with Error_Propagation ordered_set received.
- **EXZ** (Excessive Zeros):

For **DS1** with **AMI Line Coding**, more than 15 consecutive bit periods with no pulses have been received.

For **DS1** with **B8ZS Line Coding**, more than 7 consecutive bit periods with no pulses have been received.

For **DS3**, more than 2 consecutive bit periods with no pulses have been received.

Test Results

Alarms/Errors

IP/UDP/TCP

Errors

➤ **IP Chksum** (IP Checksum)

RX: The IP datagrams received have invalid IP header checksum. Only available for IPv4.

➤ **UDP Chksum** (UDP Checksum)

RX: The UDP segments received have invalid UDP checksum.

➤ **TCP Chksum** (TCP Checksum)

RX: The TCP segments received have invalid TCP checksum.

ISDN

Alarms

➤ **D-Ch Down** (D-Channel Down)

RX: The Data Link Layer is not in the multiple-frame established state.

Errors

➤ **D-Ch FCS** (D-Channel FCS)

RX: D-Channel Frames have an invalid FCS.

ODUx

Note: For OPUx alarms see page 340.

Alarms

➤ **AIS** (Alarm Indication Signal)

RX: The STAT information in the PM byte 3, bits 6 to 8 is “111” for at least 3 consecutive frames.

TX: Generates an all "1"s pattern in the entire ODUk signal, excluding the frame alignment overhead (FA OH), OTUk overhead (OTUk OH) and ODUk FTFL.

➤ **BDI** (Backward Defect indication)

RX: The BDI bit in the PM overhead field (byte 3, bit 5) is “1” for at least 5 consecutive frames.

TX: Generates a “1” in the BDI (byte 3, bit 5) of the PM overhead field continuously.

➤ **BSD** (Backward Signal Degrade)

RX: The FTFL byte 128 is “00000010”.

TX: Generates a “00000010” pattern in the FTFL Byte 128 continuously.

➤ **BSF** (Backward Signal Fail)

RX: The FTFL byte 128 is “00000001”.

TX: Generates a “00000001” pattern in the FTFL Byte 128 continuously.

➤ **FSD** (Forward Signal Degrade)

RX: The FTFL byte 0 is “00000010”

TX: Generates a “00000010” pattern in the FTFL Byte 0 continuously.

Test Results

Alarms/Errors

➤ **FSF** (Forward Signal Fail)

RX: The FTFL byte 0 is “00000001”.

TX: Generates a “00000001” pattern in the FTFL Byte 0 continuously.

➤ **LCK** (Lock)

RX: STAT information in the PM byte 3, bits 6 to 8 is “101” for at least 3 consecutive frames.

TX: Generates a repeating "01010101" pattern in the entire ODUk signal, excluding the frame alignment overhead (FA OH) and OTUk overhead (OTUk OH).

➤ **OCI** (Open Connection Indication)

RX: STAT information in the PM byte 3, bits 6 to 8 is “110” for at least 3 consecutive frames.

TX: Generates a repeating "01100110" pattern in the entire ODUk signal, excluding the frame alignment overhead (FA OH) and OTUk overhead (OTUk OH).

➤ **TIM** (Trace Identification Mismatch)

RX: The received SAPI and/or DAPI do not math the expected SAPI and/or DAPI. This alarm is only available when the SAPI ODU-TIM and/or DAPI ODU-TIM check boxes are selected from *PT* on page 156.

Errors**➤ BIP-8** (Bit Interleave Parity-8)

RX: There is a PM BIP-8 mismatch between the received value and locally computed value (0 to 8).

➤ BEI (Backward Error Indication)

RX: Interleaved block in error detected by the corresponding ODU path monitoring sink using the BIP-8 code.

ODU BEI bits (1234)	BIP violations	ODU BEI bits (1234)	BIP violations
0000	0	0101	5
0001	1	0110	6
0010	2	0111	7
0011	3	1000	8
0100	4	1001 to 1111	0

ODUx-TCM

Alarms

➤ **BDI** (Backward Defect Indication)

RX: The BDI bit in the TCM overhead field Byte 3, bit 5 is “1” for at least 5 consecutive frames.

TX: Generates a "1" in the BDI bit of the TCM overhead field (byte 3, bit 5) continuously.

➤ **BIAE** (Backward Incoming Alignment Error)

RX: The BEI/BIAE bits in the TCM overhead field Byte 3, bits 1 to 4 are “1011” for at least 3 consecutive frames.

TX: Generates "1011" in the BEI/BIAE bits of the TCM overhead (byte 3, bits 1 to 4) continuously.

➤ **IAE** (Incoming Alignment Error)

RX: The STAT information in the TCM is “010” for at least 3 consecutive frames.

TX: Generates "1" in the IAE bit of the TCM overhead (byte 3, bit 6) continuously.

➤ **LTC** (Loss of Tandem Connection)

RX: The STAT information in the TCM Byte 3, bits 6, 7, and 8 are “000” for at least 3 consecutive frames.

TX: Generates "000" in the STAT field of TCM overhead (byte 3, bits 6 to 8) continuously.

➤ **TIM** (Trace Identification Mismatch)

RX: The SAPI and/or DAPI do not math the expected SAPI and/or DAPI. This alarm is only available when the Enable TIM SAPI and/or DAPI check boxes are selected from *PT* on page 156.

Errors

➤ BIP-8 (Bit Interleave Parity-8)

RX: There is a TCM BIP-8 mismatch between the received value and locally computed value (0 to 8).

➤ BEI (Backward Error Indication)

RX: Interleaved block in error detected by the corresponding ODU tandem connection monitoring sink using the BIP-8 code.

ODU TCM BEI bits (1234)	BIP violations	ODU BEI bits (1234)	BIP violations
0000	0	0101	5
0001	1	0110	6
0010	2	0111	7
0011	3	1000	8
0100	4	1001 to 1111	0

Test Results

Alarms/Errors

OPUx

Note: *OPUx is displayed under ODUx alarms/errors group.*

Alarms

➤ **AIS** (Alarm Indication Signal)

RX: A PRBS11 pattern is received indicating a failure of the client signal.

TX: Generates a PRBS11 pattern.

➤ **CSF** (Client Signal Fail)

RX: Bit 1 of the OPUk PSI[2] byte is set to “1” indicating a failure of the client signal mapped into the OPUk of the OTN signal.

TX: Sets the bit 1 of the OPUk PSI[2] byte to “1”.

➤ **PLM** (Payload Mismatch) is available when OPU-PLM check box is selected.

RX: The Payload Structure Identifier (PSI) field does not match the expected PT for at least 3 consecutive frames.

OTL

Alarms

➤ **LOL** (Loss of Lane Alignment)

RX: Multilane alignment process is in the out-of-alignment (OLA) state for 3 ms.

➤ **LOF** (Loss of Frame)

RX: OOF is present for at least 3 ms.

➤ **OOF** (Out-Of-Frame)

RX: Any byte of the FAS (bytes 3, 4, and 5) is in error for at least 5 consecutive frames.

➤ **LOR** (Loss Of Recovery)

RX: When OOR persists at least 3 ms.

➤ **OOO** (Out-Of-Recovery)

RX: While in In-recovery (IR) state, in five consecutive 16320 byte periods each of the received logical lane marker (LLM) is different from the accepted LLM value.

➤ **Exc. Skew** (Excessive Skew)

RX: The skew exceeds the defined threshold (see *Skew Alarm Threshold (bits)* on page 498).

Errors

➤ **FAS** (Frame Alignment Signal)

RX: The FAS bits are in error.

➤ **Inv. Marker** (Invalid Marker)

RX: Errors are detected in the 66-bit block alignment marker.

OTUx

Note: Available for OTU4, OTU3, OTU3e1, OTU3e2, OTU2, OTU2f, OTU1f, OTU2e, OTU1e, and OTU1.

Alarms

- **AIS** (Alarm Indication Signal) available with serial interfaces only.
RX: Polynomial number 11 (PN-11) is over all OTU frame bits including FAS and MFAS for at least 3 consecutive 8192 bit-interval.
TX: Generates polynomial number 11 (PN-11) over all OTU frame bits including FAS and MFAS continuously.
- **BDI** (Backward Defect Indication)
RX: The BDI bit in the SM overhead field (byte 3, bit 5) is “1” for at least 5 consecutive OTU frames.
TX: Generates “1” for the BDI bit in the SM overhead field (byte 3, bit 5) continuously.
- **BIAE** (Backward Incoming Alignment Error)
RX: The BEI/BIAE bits in the SM overhead field (byte 3, bits 1 to 4) are “1011” for at least 3 consecutive frames.
TX: Generates “1011” for the BEI/BIAE bits in the SM overhead field (byte 3, bits 1 to 4) continuously.
- **IAE** (Incoming Alignment Error)
RX: The IAE bit in the SM overhead field (byte 3, bit 6) is “1” for at least 5 consecutive OTU frames.
TX: Generates “1” for the IAE bit in the SM overhead field (byte 3, bit 6) continuously.

- **LOF** (Loss of Frame)
RX: OOF is present for at least 3 ms.
TX: Generates error in all FAS bits continuously.
- **LOM** (Loss Of Multiframe)
RX: OOM is present for at least 3 ms
TX: Generates error in MFAS bits continuously.
- **OOF** (Out-Of-Frame)
RX: FAS (bytes 3, 4, and 5) are in error for at least 5 consecutive OTU frames.
TX: Generates error in all FAS bits for 5 consecutive OTU frames.
- **OOM** (Out-Of-Multiframe)
RX: MFAS are in error for at least 5 consecutive OTU frames.
TX: Generates error in multiframe number for 5 consecutive OTU frames.
- **TIM** (Trace Identifier Mismatch)
RX: Expected SM SAPI and/or SM DAPI do not match the received SM SAPI and/or DAPI for at least 3 consecutive TTl. This alarm is only available when the Enable TIM SAPI OTU-TIM and/or DAPI OTU-TIM check boxes are selected from page 303.

Test Results

Alarms/Errors

Errors

➤ **BEI** (Backward Error Indication)

RX: SM BEI errors are received from the DUT (value 0 to 8).

OTU BEI bits (1234)	BIP violations	ODUk BEI bits (1234)	BIP violations
0000	0	0101	5
0001	1	0110	6
0010	2	0111	7
0011	3	1000	8
0100	4	1001 to 1111	0

➤ **BIP-8** (Bit Interleave Parity-8)

RX: There is a SM BIP-8 mismatch between the received value and locally computed value (0 to 8).

➤ **FAS** (Frame Alignment Signal)

RX: The FAS bits are in error.

➤ **FEC-CORR** (Forward Error Correction - Correctable)

RX: Statistics on codewords (CW; default), symbols (SYMB), or bits (BIT) corrected by the FEC.

TX:

FEC-CORR-CW (Forward Error Correction - Correctable - Codeword): Generates 8 symbols (bytes) containing 8 bits in error each, in each codeword.

FEC-CORR-SYM (Forward Error Correction - Correctable - Symbol): Generates 1 symbol (byte) containing 8 bits in error.

FEC-CORR-BIT (Forward Error Correction - Correctable - Bit): Generates 1 symbol (byte) containing 1bit in error.

➤ **FEC-UNCORR** (FEC - Uncorrectable)

RX: Statistics on the detected codewords (CW) having uncorrectable errors.

TX: FEC-UNCORR-CW (Forward Error Correction - Uncorrectable - Codeword) generates 16 symbol (bytes) containing 8 bits in error each, in each codeword.

➤ **FEC-STRESS** (Forward Error Correction - Stress)

TX: Generates correctable errors composed of a random number of symbol errors (less or equal to 8) containing a random number of bits distributed all over the OTU frame.

➤ **MFAS** (Multiframe Alignment Signal)

RX: The MFAS bits are in error.

PTP

Alarms

➤ Loss Sync

RX: The Slave Clock does not receive packet timing signal messages (Sync, Follow Up, Delay Resp) within their expected arrival time for a duration exceeding the configured **Receipt Timeout** (refer to *Alarm Timeout/Threshold* on page 122).

➤ Loss Announce

RX: The Slave Clock does not receive Announce messages within their expected arrival time for a duration exceeding the configured **Receipt Timeout** (refer to *Alarm Timeout/Threshold* on page 122).

➤ Unusable (G.8265.1)

RX: Either the maximum Sync IPDV value or the maximum Delay Req IPDV value in the last second exceeds the configured **IPDV Threshold** (refer to *Alarm Timeout/Threshold* on page 122).

➤ Domain Mismatch (G.8275.1)

RX: The received Domain value does not match the configured value (refer to page 117).

➤ QL Mismatch

RX: The received QL value does not match the Expected QL (refer to page 122 or page 399). The **QL Mismatch** alarm is only reported when at least one Announce message has already been received (**Last QL Received**) and that the **QL Mismatch Monitoring** check box is selected.

QoS Metrics

Note: *Only available with Traffic Gen & Mon test application.*

Errors

➤ **Frame Loss**

RX: A sequence number is missing in the received frames.

➤ **Out-of-Seq.** (Out-of-Sequence)

RX: The received frame sequence number is either smaller than the expected frame sequence number or is a duplicate number.

RS-FEC

Alarms

➤ **FEC-LOA** (FEC-Loss Of Alignment)

RX: Deskew process is not complete meaning that not all lanes are synchronized (Alignment Marker locked) and aligned.

➤ **FEC-LOAML** (FEC-Loss Of Alignment Marker Lock)

RX: The location of the alignment marker payload sequence for a given lane on the PMA service interface is not detected.

Error

➤ **FEC-CORR-CW** (FEC Correctable Codeword)

RX: FEC Codeword that contains errors and were corrected.

➤ **FEC-UNCORR-CW** (FEC Uncorrectable Codeword)

RX: FEC Codeword that contains errors and were not corrected.

➤ **FEC-SYMB** (FEC Symbol)

RX: FEC Symbol that contains errors and were corrected on FEC per lane.

S-OAM and MPLS-TP OAM

Alarms

Note: The following alarms are available when the **CC Function** check box is selected (refer to page 240).

➤ **Loss Continuity**

RX: No CCM frames with same or lower MEG/MD Level were received from the peer MEP within an interval equal to 3.5 times the configured CCM transmission period. The alarm is cleared when at least 3 CCM frames with same or lower MEG/MD Level from the peer MEP are received within an interval equal to 3.5 times the configured CCM transmission period.

➤ **Mismerge**

RX: A CCM frame was received from the peer MEP with same MEG/MD Level but with incorrect MEG ID/MAID value or format. The MAID, composed of a Domain ID and a Short MA Name strings, is incorrect if one or both strings are not as expected. The alarm is cleared when no CCM frames with same MEG/MD Level but with incorrect MEG ID/MAID value or format are received within an interval equal to 3.5 times the configured CCM transmission period.

➤ **Unexp MEG/MD Lvl (Unexpected MEG/MD Level)**

RX: A CCM frames was received from the peer MEP with lower MEG/MD Level. The alarm is cleared when no CCM frames with lower MEG/MD Level are received within an interval equal to 3.5 times the configured CCM transmission period.

Test Results

Alarms/Errors

➤ **Unexp MEP** (Unexpected MEP)

RX: A CCM frame was received from the peer MEP with same MEG/MD Level, correct MEG ID/MAID, and correct source MAC Address (corresponds to the peer MEP) but with unexpected MEP ID. The alarm is cleared when no CCM frames with same MEG/MD Level, correct MEG ID/MAID, correct source MAC Address (corresponds to the peer MEP) but with an unexpected MEP ID are received within an interval equal to 3.5 times the configured CCM transmission period.

➤ **Unexp Period** (Unexpected Period)

RX: A CCM frame is received from the peer MEP with same MEG/MD Level, correct MEG ID/MAID, and correct MEP ID but with a period field value different than the one configured. The alarm is cleared when no CCM frames with same MEG/MD Level, correct MEG ID/MAID, and correct MEP ID but with incorrect period field value are received within an interval equal to 3.5 times the configured CCM transmission period.

➤ **RDI** (Remote Defect Indication)

RX: The RDI flag bit of a valid CCM frames is set to 1. A valid CCM frame has its source MAC address matching the Peer MEP MAC address, the destination MAC address matching either the unit port Unicast MAC address or a Multicast class 1 address (refer to page 678), and VLANs matching the unit port VLANs.

TX: The RDI flag bit of transmitted CCM frames is set to 1.

Note: *The following alarms are available with G.8113.1, Y.1731 and MEF modes.*

➤ **AIS** (Alarm Indication Signal)

RX: A valid AIS frame is received. A valid frame has its destination MAC address matching either the unit port Unicast MAC address or a Multicast class 1 address (refer to page 678), VLANs matching the unit port VLANs, and MEG level matching the local MEG level. The alarm is cleared when during an interval equal to 3.5 times the AIS transmission period indicated in the last received AIS frame, no AIS frames are received.

➤ **LCK** (Locked)

RX: An valid LCK frame is received. A valid frame has its destination MAC address matching either the unit port Unicast MAC address or a Multicast class 1 address (refer to page 678), VLANs matching the unit port VLANs, and MEG level matching the local MEG level. The alarm is cleared when during an interval equal to 3.5 times the LCK transmission period indicated in the last received LCK frame, no LCK frames are received.

➤ **C-LOS** (Client Signal Fail - Loss Of Signal)

RX: A CSF frame is received with CSF type equal to **000**. The alarm is cleared when no CSF (C-LOS) frames are received during an interval equal to 3.5 times the CSF transmission period indicated in the last received CSF (C-LOS) frame, or when a CSF frame is received with Client Defect Clear Indication (C-DCI) information (CSF Type 011).

TX: Generates a CSF frame with CSF type equal to **000**.

Test Results

Alarms/Errors

➤ **C-FDI** (Client Signal Fail - Forward Defect Indication)

RX: A CSF frame is received with CSF type equal to **001**. The alarm is cleared when no CSF (C-FDI) frames are received during an interval equal to 3.5 times the CSF transmission period indicated in the last received CSF (C-FDI) frame, or when a CSF frame is received with Client Defect Clear Indication (C-DCI) information (CSF Type 011).

TX: Generates a CSF frame with CSF type equal to **001**.

➤ **C-RDI** (Client Signal Fail - Remote Defect Indication)

RX: A CSF frame is received with CSF type equal to **010**. The alarm is cleared when no CSF (C-RDI) frames are received during an interval equal to 3.5 times the CSF transmission period indicated in the last received CSF (C-RDI) frame, or when a CSF frame is received with Client Defect Clear Indication (C-DCI) information (CSF Type 011).

TX: Generates a CSF frame with CSF type equal to **010**.

➤ **C-DCI** (Client Signal Fail - Defect Clear Indication)

TX: Generates a CSF frame with CSF type equal to **011**.

Section/Line / RS/MS

Alarms

- **LOF-S** (Loss Of Frame - Section) - SONET
RS-LOF (Regeneration Section - Loss Of Frame) - SDH
RX: A SEF (SONET)/RS-OOF (SDH) defect on the incoming optical signal persists for at least 3 milliseconds.
TX: Generates non-valid framing bytes (A1 and A2).
- **SEF** (Severely Errored Framing) - SONET.
RS-OOF (Regeneration Section - Out-Of-Frame) - SDH.
RX: A minimum of four consecutive errored framing patterns are received.
TX: Generates four consecutive errored framing patterns.
- **TIM-S** (Trace Identifier Mismatch - Section) - SONET
RS-TIM (Regeneration Section - Trace Identifier Mismatch) - SDH
RX: The received J0 Trace doesn't match the expected message value. Only available when Enable TIM-S/RS-TIM check box is selected (refer to *Traces (SONET/SDH)* on page 302).
- **AIS-L** (Alarm Indication Signal - Line) - SONET
MS-AIS (Multiplex Section - Alarm Indication Signal) - SDH
RX: Bits 6, 7 and 8 of the K2 byte contain the "111" pattern in five consecutive frames.
TX: Generates a SONET/SDH signal that contains a valid Section Overhead (SOH) / Regenerator Section Overhead (RSOH) and an all-ones pattern on the SPE.

Test Results

Alarms/Errors

- **RDI-L** (Remote Defect Indication - Line) - SONET
MS-RDI (Multiplex Section - Remote Defect Indication) - SDH
RX: Bits 6, 7, and 8 of the K2 byte contain the “110” pattern in five consecutive frames.
TX: Generates a “110” pattern for the bits 6, 7 and 8 of the K2 byte.

Errors

- **FAS-S** (Frame Alignment Signal - Section) - SONET
RS-FAS (Regeneration Section - Frame Alignment Signal) - SDH
RX: At least one A1 or A2 byte of the FAS word is in error.
- **B1** (BIP-8, Bit-Interleave Parity - 8 bits)
RX: Indicates a Section (SONET) / Regeneration Section (SDH) parity error by performing a routine even-parity check over all frames of the previous STS-n/STM-n signal (located in the first STS-1/STM-1 of an STS-n/STM-n signal).
- **B2** (BIP-8, Bit-Interleave Parity - 8 bits)
RX:
 - SONET: Indicates a Line parity error by performing an even-parity check over all bits of the LOH and SPE of the previous frame (located in every STS-1 of an STS-n signal).
 - SDH: Indicates a Multiplex Section parity error by performing an even-parity check over all bits (except those in the RSOH bytes) of the previous frame of a STM-N signal.
- **REI-L** (Remote Error Indicator - Line) - SONET
MS-REI (Multiplex Section - Remote Error Indicator) - SDH
RX: The M0, M1, or the combination of both M0 and M1 bytes indicate that one or more BIP violations have been detected. Refer to *M0 or M1/Z2 (SONET)* on page 533 for more information. For OC-192, also refer to *REI-L Computation Method* on page 276.

STS-x/AU-x

Alarms

- **AIS-P** (Alarm Indication Signal - Path) - SONET
AU-AIS (Administrative Unit - Alarm Indication Signal) - SDH
RX: The H1 and H2 bytes contain an all-ones pattern in three consecutive frames or more.
TX: Generates an all-ones pattern over H1, H2, H3, and SPE.
- **LOP-P** (Loss Of Pointer - Path) - SONET
AU-LOP (Administrative Unit - Loss Of Pointer) - SDH
RX: A valid pointer is not found in N consecutive frames (where $8 \leq N \leq 10$), or that N consecutive NDFs ("1001" pattern) are detected (non-concatenated payloads).
TX: Generates a non-valid pointer.
- **UNEQ-P** (Unequipped - Path) - SONET
HP-UNEQ (HP - Unequipped) - SDH
RX: The C2 byte contains "00 H" in five consecutive frames. Only available when PLM-P/UNEQ-P / HP-PLM/HP-UNEQ is enabled (refer to *Labels* on page 176).
TX: Generates an all-zeros pattern over POH and SPE.
- **H4-LOM** (H4 - Loss Of Multiframe)
RX: For VT/TU structured optical frames, the system loss track of the H4 byte multiframe indicator sequence.
TX: Generates a wrong H4 byte multiframe indicator sequence.
- **TIM-P** (Trace Identifier Mismatch - Path) - SONET
HP-TIM (HP - Trace Identifier Mismatch) - SDH
RX: J1 Trace doesn't match the expected message value. Only available when TIM-P/HP-TIM is enabled (refer to *Traces (SONET/SDH)* on page 302).

Test Results

Alarms/Errors

- **PLM-P** (Payload Label Mismatch - Path) - SONET

HP-PLM (HP - Payload Label Mismatch) - SDH

RX: Five consecutive frames have mismatched STS/VC signal labels (C2 byte). Only available when PLM-P/UNEQ-P / HP-PLM/HP-UNEQ is enabled (refer to *Labels* on page 176).

- **PDI-P** (Payload Defect Indication - Path) - SONET

RX: For VT-structured STS-1 SPE, there is a LOP-V, AIS-V, DS3 AIS, DS3 LOS, or DS3 OOF defect on any VT or DS3 payload that it embeds into the STS SPE that it is originating. For non-VT-structured STS-1 or STS-Nc SPE, the C2 byte contains the hexadecimal FC code.

TX: For VT-structured STS-1 SPE, generates a VT-structured STS-1 SPE with payload defect. For non-VT-structured STS-1 or STS-Nc SPE, inserts the hexadecimal FC code in the C2 byte.

- **RDI-P** (Remote Defect Indication - Path) - SONET

HP-RDI (High Order Path - Remote Defect Indication) - SDH

RX: Bits 5, 6, and 7 of the G1 byte contain the “100” or “111” pattern in five consecutive frames.

TX: Generates a “100” pattern for bits 5, 6 and 7 of the G1 byte.

- **ERDI-PCD** (Enhanced RDI - Path Connectivity Defect) - SONET

ERDI-CD (Enhanced RDI - Path Connectivity Defect) - SDH

RX: Bits 5, 6 and 7 of the G1 byte contain the “110” pattern in five consecutive frames.

TX: Generates a “110” pattern for bits 5, 6 and 7 of the G1 byte.

- **ERDI-PPD** (Enhanced RDI - Path Payload Defect) - SONET

ERDI-PD (Enhanced RDI - Payload Defect) - SDH

RX: Bits 5, 6 and 7 of the G1 byte contain the “010” pattern in five consecutive frames.

TX: Generates a “010” pattern for bits 5, 6 and 7 of the G1 byte.

- **ERDI-PSD** (Enhanced RDI - Path Server Defect) - SONET
ERDI-SD (Enhanced RDI - Server Defect) - SDH

RX: Bits 5, 6 and 7 of the G1 byte contain the “101” pattern in five consecutive frames.

TX: Generates a “101” pattern for bits 5, 6 and 7 of the G1 byte.

Errors

- **B3** (BIP-8, Bit-Interleave Parity - 8 bits)

RX: Indicates a high order path parity error by performing an even-parity check over all bits of the previous SPE (SONET) / VC-N (SDH).

- **REI-P** (Remote Error Indicator - Path) - SONET
HP-REI (HP - Remote Error Indicator) - SDH

RX: Bits 1 through 4 of the G1 byte contain one pattern from the following binary range: “0001” through “1000” (1 to 8) (located in every STS-1/STM-1 of an STS-n/STM-n signal).

SyncE

Alarms

➤ ESMC Loss

RX: No ESMC valid information frames were received for more than 5 seconds.

➤ QL Mismatch (available when the **QL Mismatch Monitoring** check box is selected)

RX: The received QL value does not match the Expected QL (refer to page 291 or page 401).

TCM (SONET/SDH)

Note: *TCM is displayed for rates up to OC-192/STM-64 under the STS-x/AU-x or VT/TU alarms/errors group when TCM is enabled.*

Alarms

➤ **TC-UNEQ-P / HPTC-UNEQ** (Unequipped)

RX/TX: An all “0”s pattern is received/generated in the higher order path signal label byte (C2), the TCM byte (N1) and the path trace byte (J1), and a valid BIP-8 bytes (B3).

➤ **TC-UNEQ-V / LPTC-UNEQ** (Unequipped)
(LPTC - Unequipped)

RX/TX: An all “0”s pattern is received/generated in the lower order path signal label (bit 5, 6, 7 of byte V5), the TCM byte (Z6/N2) and the path trace byte (J2), and a valid BIP-2 (bits 1, 2 of V5 byte).

➤ **TC-LTC-P / TC-LTC-V / HPTC-LTC / LPTC-LTC** (Loss of Tandem Connection)

RX/TX: A wrong FAS multiframe is received/generated.

➤ **TC-IAIS-P / HPTC-IAIS** (Incoming Alarm Indication Signal)

RX/TX: Bits 1 through 4 of the N1 byte are set to “1110”.

➤ **TC-IAIS-V / LPTC-IAIS** (Incoming Alarm Indication Signal)

RX/TX: Bit 4 of the Z6/N2 byte is set to “1”.

➤ **TC-ODI-P / TC-ODI-V / HPTC-ODI / LPTC-ODI** (Outgoing Defect Indication)

RX/TX:

- SONET: Bit 7 of the N1/Z6 byte frame 74 is set to “1”.
- SDH: Bit 7 of the N1/N2 byte multiframe 74 is set to “1”.

Test Results

Alarms/Errors

- **TC-TIM-P / TC-TIM-V / HPTC-TIM / LPTC-TIM** (Trace Identifier Mismatch)

RX: The received message differs from the defined expected message. The TC-TIM is also declared when receiving invalid ASCII characters or when errors are detected with CRC-7.

- **TC-RDI-P / TC-RDI-V / HPTC-RDI / LPTC-RDI** (Remote Defect Indication)

RX/TX:

- **SONET:** The TC-RDI is declared when bit 8 of the N1/Z6 byte frame 73 is set to “1”.
- **SDH:** The TC-RDI is declared when bit 8 of the N1/N2 byte multiframe 73 is set to “1”.

Errors

- **TC-VIOL-P / HPTC-VIOL** (Violations)

RX: TC-VIOL indicates the number of B3 parity violation within the tandem connection for STS-1 SPE/VC-3 and above.

- **TC-VIOL-V / LPTC-VIOL** (Violations)

RX: TC-VIOL indicates the number of violation within the tandem connection for VT6 SPE/VC-2 and below.

➤ **TC-IEC-P / HPTC-IEC** (Incoming Error Count)

RX: The TC-IEC indicates the number of B3 parity violations detected at the TC Source for STS-1 SPE/VC-3 and above (bits 1 to 4 of the N1 byte).

Number of BIP-8 violations	Bit				Number of BIP-8 violations	Bit			
	1	2	3	4		1	2	3	4
0	0	0	0	0	8	1	0	0	0
1	0	0	0	1	0	1	0	0	1
2	0	0	1	0	0	1	0	1	0
3	0	0	1	1	0	1	0	1	1
4	0	1	0	0	0	1	1	0	0
5	0	1	0	1	0	1	1	0	1
6	0	1	1	0	0 (IAIS)	1	1	1	0
7	0	1	1	1	0	1	1	1	1

➤ **TC-OEI-P / TC-OEI-V / HPTC-OEI / LPTC-OEI** (Outgoing Error Indication)

RX: Indicates errored blocks of the outgoing VTn/VC-n (bit 6 of the N1 or Z6/N2 byte).

TX: Bit 6 of the N1 or Z6/N2 byte is set to 1.

➤ **TC-REI-P / TC-REI-V / HPTC-REI / LPTC-REI** (Remote Error Indication)

RX: Indicates errored blocks caused within the Tandem Connection (bit 5 of the N1 or Z6/N2 byte).

TX: Bit 5 of N1 or Z6/N2 byte is set to 1.

VT/TU

Alarms

- **AIS-V** (Alarm Indication Signal - VT) - SONET
TU-AIS (Tributary Unit - Alarm Indication Signal) - SDH

RX: V1 and V2 bytes for the VT/TU path contain an all-ones pattern in three (SONET) / five (SDH) consecutive superframes.

TX: Generates an all-ones pattern for the V1 and V2 bytes of the VT/TU path and payload.
- **LOP-V** (Loss Of Pointer - VT) - SONET
TU-LOP (Tributary Unit - Loss Of Pointer) - SDH

RX: A valid pointer is not found in N consecutive superframes (where $8 \leq N \leq 10$), or if N consecutive NDFs ("1001" pattern).

TX: Generates a non-valid pointer.
- **RDI-V** (Remote Defect Indication - VT) - SONET
LP-RDI (Tributary Unit - Remote Defect Indication) - SDH

RX: Bit 8 of the V5 byte contains "1" in five consecutive VT/TU superframes while bits 6 and 7 of the Z7 (SONET) / K4 (SDH) byte contain the "00" or "11" pattern.

TX: Generates "1" for the bit 8 of the V5 byte and a "00" pattern for bits 6 and 7 of the Z7 (SONET) / K4 (SDH) byte.
- **RFI-V** (Remote Failure Indication - VT) - SONET
LP-RFI (LOP - Remote Failure Indication) - SDH, available with VC-11 only.

RX: Bit 4 of the V5 byte contains "1" in five consecutive superframes.

TX: Generates "1" for the bit 4 of the V5 byte.

- **TIM-V** (Trace Identifier Mismatch - VT) - SONET
LP-TIM (LOP - Trace Identifier Mismatch) - SDH

RX:

- SONET: The J2 Trace doesn't match the expected message value. Only available when the **TIM-V** check box is selected (refer to page *Traces (SONET/SDH)* on page 302).
- SDH: None of the sampled LP trace strings match the expected message value. Only available when the **LP-TIM** check box is selected (refer to page *Traces (SONET/SDH)* on page 302).

- **PLM-V** (Payload Label Mismatch - VT) - SONET
LP-PLM (LOP - Payload Label Mismatch) - SDH

RX: Five consecutive superframes with mismatched VT/LP Signal (bits 5 through 7 of the V5 byte are "000", "001" or "111"). Only available when the **PLM-V/UNEQ-V / LP-PLM/LP-UNEQ** check box is selected (refer to page *Labels* on page 176).

- **UNEQ-V** (Unequipped - VT) - SONET
LP-UNEQ (LOP - Unequipped) - SDH

RX: Bit 5 through 7 of the V5 byte contain "000" for five consecutive superframes. Only available when the **PLM-V/UNEQ-V / LP-PLM/LP-UNEQ** check box is selected (refer to page *Labels* on page 176).

TX: Generates samples of unequipped VT/LP signal label (bits 5 through 7 of V5 byte are set to "000").

- **ERDI-VSD** (Enhanced RDI - VT Server Defect) - SONET
LP-ERDI-SD (LOP - Enhanced RDI - Server Defect) - SDH

RX: Bits 5, 6, and 7 of the Z7 (SONET) / K4 (SDH) byte contain the "101" pattern, and bit 8 of the V5 byte contain "1", in five consecutive VT/LP superframes.

TX: Generates a "101" pattern for bits 5, 6, and 7 of the Z7 (SONET) / K4 (SDH) byte, and "1" for bit 8 of the V5 byte.

Test Results

Alarms/Errors

- **ERDI-VCD** (Enhanced RDI - VT Connectivity Defect) - SONET
LP-ERDI-CD (LOP - Enhanced RDI - Connectivity Defect) - SDH

RX: Bits 5, 6, and 7 of the Z7 (SONET) / K4 (SDH) byte contain the “110” pattern, and bit 8 of the V5 byte contain “1”, in five consecutive VT/LP superframes.

TX: Generates a “110” pattern for bits 5, 6, and 7 of the Z7 (SONET) / K4 (SDH) byte, and “1” for bit 8 of the V5 byte.
- **ERDI-VPD** (Enhanced RDI - VT Path Payload Defect) - SONET
LP-ERDI-PD (LOP - Enhanced RDI - Path Payload Defect) - SDH

RX: Bits 5, 6, and 7 of the Z7 (SONET) / K4 (SDH) byte contain the “010” pattern, and bit 8 of the V5 byte contain “0”, in five consecutive VT/LP superframes.

TX: Generates a “010” pattern for bits 5, 6, and 7 of the Z7 (SONET) / K4 (SDH) byte, and “0” for bit 8 of the V5 byte.

Errors

- **BIP-2** (Bit-Interleave Parity - 2 bits)

RX:

SONET: The BIP-2 error indicates a parity error by performing a routine even-parity check over all VT1.5 bytes of the previous frame of a composite signal (VT1.5/VT2/VT6).

SDH: The BIP-2 error indicates a Low Order Path parity error by performing a routine even-parity check over all bytes of the previous VC frame.
- **REI-V** (Remote Error Indicator - VT) - SONET
LP-REI (Low Order Path - Remote Error Indicator) - SDH

RX: REI is declared when bit 3 of the V5 byte is set to “1”.

WIS

Note: *Available under the WIS sub tab for 10G WAN interface only.*

Alarms

➤ **WIS Link Down**

RX: At least one of the following errors is present: AIS-P, LOF, PLM-P, SEF, LOP, or AIS-L.

➤ **SEF** (Severely Errored Framing)

RX: A minimum of four consecutive errored framing patterns.

TX: Generates more than four consecutive errored framing patterns.

➤ **LOF** (Loss Of Frame)

RX: A Severely Error Framing (SEF) defect on the incoming SONET signal persists for at least 3 milliseconds.

TX: Generates a non-valid framing pattern.

➤ **AIS-L** (Alarm Indication Signal - Line)

RX: Bits 6, 7 and 8 of the K2 byte contain the "111" pattern in five consecutive frames.

TX: Generates a "111" pattern for the bits 6, 7 and 8 of the K2 byte.

➤ **RDI-L** (Remote Defect Indication - Line)

RX: Bits 6, 7, and 8 of the K2 byte contain the "110" pattern in five consecutive frames.

TX: Generates a "110" pattern for the bits 6, 7 and 8 of the K2 byte.

➤ **AIS-P** (Alarm Indication Signal - Path)

RX: The H1 and H2 bytes for a STS path contain an all-ones pattern in three consecutive frames or more.

TX: Generates an all-ones pattern for H1 and H2 bytes.

Test Results

Alarms/Errors

➤ **RDI-P** (Remote Defect Indication - Path)

RX: Bits 5, 6 and 7 of the G1 byte contain the “100” or “111” pattern in ten consecutive frames.

TX: Generates a “100” pattern for bits 5, 6 and 7 of the G1 byte.

➤ **LCD-P** (Loss of Code-Group Delineation - Path)

RX: The signal synchronization has been lost and the valid code-groups are no longer being delineated from the received payload stream being passed to the PCS.

TX: Generates a PCS link down.

➤ **LOP-P** (Loss Of Pointer - Path)

RX: For non-concatenated payloads, a valid pointer is not found in N consecutive frames (where $8 \leq N \leq 10$), or N consecutive NDFs (“1001” pattern) are detected.

TX: Generates a non-valid pointer.

➤ **PLM-P** (Payload Label Mismatch - Path)

RX: Five consecutive frames have mismatched STS signal labels.

➤ **UNEQ-P** (Unequipped - Path)

RX: The C2 byte contains “00 H” in five consecutive frames.

TX: Generates samples of unequipped STS signal labels (C2 is set to “00 H”).

➤ **ERDI-PSD** (Enhanced RDI - Path Server Defect)

RX: Bits 5, 6 and 7 of the G1 byte contain the “101” pattern in five to ten consecutive frames.

TX: Generates a “101” pattern for bits 5, 6 and 7 of the G1 byte.

➤ **ERDI-PCD** (Enhanced RDI - Path Connectivity Defect)

RX: Bits 5, 6 and 7 of the G1 byte contain the “110” pattern in five to ten consecutive frames.

TX: Generates a “110” pattern for bits 5, 6 and 7 of the G1 byte.

➤ **ERDI-PPD** (Enhanced RDI - Path Payload Defect)

RX: Bits 5, 6 and 7 of the G1 byte contain the “010” pattern in five to ten consecutive frames.

TX: Generates a “010” pattern for bits 5, 6 and 7 of the G1 byte.

PLM-P/UNEQ-P (Payload Label Mismatch - Path / Unequipped - Path) check box when selected (cleared by default) enables the Signal Label Mismatch for the expected message defined as well as **UNEQ-P** monitoring.

Errors

➤ **B1** (BIP-8, Bit-Interleave Parity - 8 bits)

RX: Indicates a Section parity error by performing a routine even-parity check over all Section bits of the previous frame of a composite signal (located in the first STS-1 of an STS-n signal).

➤ **B2** (BIP-1536, Bit-Interleave Parity - 1536 bits)

RX: Indicates a Line parity error by performing a routine even-parity check over all Line bits of the LOH and STS-1 frame capacity of the previous frame of a composite signal (located in every STS-1 of an STS-n signal).

➤ **B3** (BIP-8, Bit-Interleave Parity - 8 bits)

RX: Indicates a Path parity error by performing a routine even-parity check over all Path bits of the previous SPE excluding the LOH and SOH.

Test Results

Alarms/Errors


➤ **REI-L** (Remote Error Indicator - Line)

RX: Bits 5 through 8 of the M0 byte contain one pattern from the following binary range: "0001" through "1000" (1 to 8) (located in the first STS-1 of an STS-n signal).

➤ **REI-P** (Remote Error Indicator - Path)

RX: Bits 1 through 4 of the G1 byte contain one pattern from the following binary range: "0001" through "1000" (1 to 8) (located in every STS-1 of an STS-n signal).

Inject Button



Selected Alarm/Error
and status

Open/Close pop-up button

- **Layer:** Allows to select on which layer is the alarm/error to be generated. Choices depend on the test application and its interface.
- Port 1** or **Port 2** selection, available with **Dual Port** topology, allows to select the port used for alarm/error injection.
- **Lane**, available with parallel interface, allows to select the physical lane that will be used for injection. Available for Interface, OTL, and PCS layers only.
- **Type:** Allows to select the type of injection, either **Alarms** or **Errors**.
- **Defect:** Allows the selection of the alarm/error defect to be generated. Choices depend on the selected **Layer** and **Type**. Refer to *Alarms/Errors* on page 310 for more information.

➤ **Mode and Rate/Amount**

- **Manual** allows to enter the amount of manual error to be generated: **1** (default) through **50** or **100** (depends on the selected error).
- **Rate** allows the selection of the injection rate for the selected error. The rate must be within the minimum and maximum values specified.
- **Max Rate** generates the selected error to its theoretical maximum rate.

The following settings are only available with Carrier Ethernet OAM test application

- **Address Type** defines the destination address type of the frame: **Unicast** or **Multicast** (default).
- **Priority**¹ allows to select the VLAN user priority: **0** (default) to **7**. Refer to *VLAN ID and Priority* on page 679 for more information.
- **Drop Eligible**¹ is set to **No** (no frames will be dropped when congestion occurs) and is not configurable.
- **MEG Level** (Y.1731 and MEF) is the Maintenance Entity Group Level configurable from **0** to **7** (default).
- **Period** determines the transmission period of frames: **1 s** (default) and **1 min**. Not available with C-DCI.
- **Amount**, only available with C-DCI alarm, is set to **1**.

Note: *The RDI alarm is available when the **CC Function** is enabled and is using the parameters from the CC Function (refer to page 240 for more information).*

1. Available when VLAN is enabled (see *VLAN* on page 203).

Test Results

Alarms/Errors

➤ **Inject button**

For **Manual** mode: Manually generates the selected errors according to the defect and the amount selected.

For **Rate** and **Max Rate**: Generates respectively the selected error at the rate specified or at its theoretical maximum rate.

Note: *The selected alarm/error as well as its injection mode and status are displayed next to the **Inject** button.*

- The open/close pop-up button allows to respectively expand (up arrow) or collapse (down arrow) a pop-up allowing to set the alarm/error injection parameters.

FTFL/PT

From the **Test** menu tap **Results**, and the **FTFL/PT** tab.

FTFL

Indicates the Forward and Backward ODU Fault Type Fault Location.

- **Fault Indication** and **Code** displays the FTFL fault indicator message and its code in hexadecimal format (byte 0 for forward, byte 128 for backward).

Fault Indication	Code
No fault	00 (default)
Signal fail	01
Signal Degrade	02
Reserved	03

- **Operator Identifier** displays the received operator identifier (bytes 1 to 9 for forward, byte 129 to 137 for backward).
- **Operator Specific** displays the received operator specific (bytes 10 to 127 for forward, byte 138 to 255 for backward).

PT (Payload Type)

➤ **Payload Type and Code**

Received displays the received payload signal type and its code in hexadecimal format.

Expected allows to select the expected payload signal type either by selecting the payload from the list or by typing its hexadecimal code.

Note: Refer to PT on page 156 for the list.

- **OPU-PLM**, when selected, enables the OPU-PLM alarm analysis.
- **Copy RX** uses the received payload type as the expected payload type.

Graph (RFC 2544)

Displays the graph showing the **Throughput**, **Back-to-Back**, **Frame Loss**, and **Latency** measurements. For **Dual Test Set** the graph shows results from **Local to Remote** and **Remote to Local** using distinctive colors. For **Dual Port** topology the graph shows results from P1 to P2 (P1->P2) and P2 to P1 (P2->P1) using distinctive colors.

From the **Test** menu, tap **Results**, and the **Graphs** tab.

- **All** button allows to view the graphs of all subtests simultaneously.
- **Throughput**, **Back-to-Back**, **Frame Loss**, and **Latency** buttons allow to view an enlarged graph view of the selected subtest.
- **Displayed Results** allows to select the displayed results mode, either **Minimum**, **Maximum** (default), **Average**, or **Current**.
- **Step**, available with Frame Loss, allows to select the result step (100 percent by default) to be displayed.

The X axis shows the frame sizes while the Y axis shows the subtest results.

- **Frame Size (Bytes)** and **Step (%)**, available with Frame Loss, allows to select either **Frame Size** (default) or **Step** as the X axis criterion.

ISDN Logger

The ISDN Logger page displays color-coded ISDN messages and pass/fail verdict.

From the **Test** menu, tap **Results**, and the **ISDN Logger** tab.

- **Sort By** selects the event sorting order: **ID/Time** (default), **Message Type**, **Dir.**, **Call Ref.**, **Ch#**, or **Call Type**.
- **Filter** selects the filtering criterion: **All** (default), **Layer 2**, or **Layer 3**.
- **Time Mode** selects the time representation mode. The **Time Mode** for the **ISDN Logger** and the **Alarms/Errors Logger** is coupled.
 - **Relative** displays the time relative to the beginning of the test or the last reset. The time format is Dd HH:MM:SS.
 - **Absolute** (default) displays the date and time the test has started. The time format depends upon the platform time which will be either **MM/DD HH:MM:SS** for 24 hours time format or **MM/DD HH:MM:SS <AM/PM>** for 12 hours time format.
- **Clear Logger** button clears the logger entries.
- **Message Type** column indicates the type of message which are classified into Layer 2 and Layer 3 messages as follows.

Layer 2 messages


- **SABME** (Set Asynchronous Balanced Mode Extended) command is used to place the addressed user side or network side into a modulo 128 multiple frame acknowledged operation.
- **UA** (Unnumbered Acknowledgment) response is used by a data link layer to acknowledge the receipt and acceptance of the mode-setting commands (SABME or DISC).
- **I** (Information) command is used to transfer, across a data link connection, sequentially numbered frames containing information fields provided by Layer 3. Used while multiple frame operation is in effect on point-to-point data link.

- **UI** (Unnumbered Information) command is used to send information.
- **DISC** (Disconnect) command is used to terminate the multiple frame operation.
- **DM** (Disconnect Mode) response is used to report that the data link layer is in a state such that multiple frame operation cannot be performed.
- **FRMR** (Frame Reject) response is used to report an error condition that is not recoverable by a retransmission.
- **XID** (Exchange Identification) command/response is used for connection management to exchange information.
- **RNR** (Receive Not Ready) command/response is supervisory frame used by a data link layer entity to indicate a busy condition or to ask the status of its peer data link layer entity.
- **REJ** (Reject) command/response supervisory frame is used by a data link layer entity to request retransmission or to ask the status of its peer data link layer entity.
- **RR** (Receive ready) supervisory frame is used by a data link layer entity to indicate it is ready to receive an I frame. Besides this, it is used to acknowledge previously received I frames numbered up to and including $N(R)-1$ and clear a busy condition that was indicated by the earlier transmission of an RNR frame by the same data. In addition to indicating the status of a data link layer entity, the RR command with the P bit set to 1 may be used by the data link layer entity to ask for the status of its peer data link layer entity.

Note: *The RR message is not included in the logger as it would fill the logger in a short period since this message is used to keep alive.*

Layer 3 messages

- **SETUP** message is sent by the calling user to the network and by the network to the called user to initiate call establishment.
- **CALL PROCEEDING** message is sent by the called user to the network or by the network to the calling user to indicate that requested call establishment has been initiated and no more call establishment information will be accepted.
- **ALERTING** message is sent by the called user to the network and by the network to the calling user to indicate that called user alerting has been initiated.
- **CONNECT** message is sent by the called user to the network and by the network to the calling user, to indicate call acceptance by the called user.
- **CONNECT ACK** message is sent by the network to the called user to indicate the user has been awarded the call.
- **DISCONNECT** message is sent by the user to request the network to clear an end-to-end connection or is sent by the network to indicate that the end-to-end connection is cleared.
- **RELEASE** message is sent by the user or the network to indicate that the equipment sending the message has disconnected the channel (if any) and intends to release the channel and the call reference. Thus the receiving equipment should release the channel and prepare to release the call reference after sending a RELEASE COMPLETE.
- **RELEASE COMPLETE** message is sent by the user or the network to indicate that the equipment sending the message has released the channel (if any) and call reference, the channel is available for reuse, and the receiving equipment shall release the call reference.

- **STATUS ENQUIRY** message is sent by the user or the network at any time to solicit a STATUS message from the peer layer 3 entity. Sending a STATUS message in response to a STATUS ENQUIRY message is mandatory.
- **STATUS** message sent is by the user or the network in response to a STATUS ENQUIRY message or at any time during a call to report certain error conditions.
- **PROGRESS** message is sent by the user or the network to indicate the progress of a call in the event of interworking or in relation with the provision of in-band information/patterns.
- **RESTART** message is sent by the user or network to request the recipient to restart (return to an idle condition) the indicated channel(s) or interface.
- **RESTART ACK** message is sent to acknowledge the receipt of the RESTART message and to indicate that the requested restart is complete.
- **Event XXX - Additional Information** displays additional information on the selected event having the icon . Additional information is available for six message types.

Message Type	Additional information
DISCONNECT	Cause Value, Cause Definition, Location
RELEASE	
RELEASE COMPLETE	
PROGRESS	Progress Desc. No., Progress Description, Location
SETUP	Calling number, Called number
STATUS	Cause Value, Cause Definition, Location, Call State

Test Results

ISDN Logger

- **Cause Value** reports the reason why a call has been terminated, or a problem with a received message. (7 bits).
Supported Cause Value range: 1 to 127.
- **Cause Definition** is associated with each Cause Value but the Cause Definition is not received or transmitted with a message.
Longest Cause Definition: 86 characters.
- **Location** reports from where the action is initiated. (4 bits)
Longest **Location** definition: 45 characters.
- **Progress Desc. No.** indicates the number associated to the Progress Description.
- **Progress Description** indicates the progress of a call in the event of inter-working or in relation with the provision of in-band information/patterns.
- **Calling Number** indicates the number of the calling party.
- **Called Number** indicates the number of the called party.
- **Call State** indicates the state of the actual call.

Labels

From the **Test** menu, tap **Results**, and **Labels**.

Note: *Selecting a Label byte to be generated will automatically update the corresponding OH byte. Refer to OH - SONET/SDH on page 529 for more information.*

Labels

- **STS/AU Path (C2):** The C2 byte is allocated to indicate the content of the STS SPE / VC, including the status of the mapped payloads.

Received: Displays the received C2 byte. Refer to C2 on page 537 for more information.

- **PLM-P/UNEQ-P / HP-PLM/HP-UNEQ:** Enables the Payload Mismatch and STS/AU UNEQ monitoring. This setting is coupled with the configuration of *Labels* on page 176.

Expected: Select the expected C2 byte from the list. Refer to C2 on page 537 for more information.

- **VT/TU Path (V5):** The V5 byte is allocated to indicate the content of the VT/TU path, including the status of the mapped payloads.

Received: Displays the received V5 byte. Refer to V5 on page 540 for more information.

- **PLM-V/UNEQ-V / LP-PLM/LP-UNEQ:** Enables the Payload Mismatch and VT/TU UNEQ monitoring. This setting is coupled with the configuration of *Labels* on page 176.

Expected: Select the expected V5 byte from the list. Refer to V5 on page 540 for more information.

Link OAM

From the **Test** menu, tap **Results**, and the **Link OAM** tab.

Remote MAC Address

Indicates the remote OAM link partner MAC address.

Remote OAM Information

- **OAM Version** indicates the protocol version supported by the DTE.
- **Revision** indicates the revision of the Information TLV.
- **Multiplexer Action** reports the Multiplexer Action:
 - Forward** indicates that the device is forwarding non-OAMPDUs to the lower sublayer.
 - Discard** indicates that the device is discarding non-OAMPDUs.
- **Parser Action** reports the Parser Action:
 - Forward** indicates that the device is forwarding non-OAMPDUs to the higher sublayer.
 - Loopback** indicates that the device is looping back non-OAMPDUs to the lower sublayer.
 - Discard** indicates that the device is discarding non-OAMPDUs.
- **OAM Mode** reports the OAM mode:
 - Active** indicates that the DTE is configured in **Active** mode.
 - Passive** indicates that the DTE is configured in **Passive** mode.
- **OUI** reports the 24-bit IEEE Organizationally Unique Identifier field identifying the vendor.
- **Maximum OAMPDU Size** reports the maximum OAMPDU size in bytes, supported by the DTE.

- **Vendor Specific Information** reports the 32-bit **Vendor Specific Information** field identifying the vendor's product model and version.
- **Unidirectional** reports unidirectional support capability:
 - Supported** indicates that the DTE is capable of sending OAMPDUs when the receive path is non-operational.
 - Unsupported** indicates that the DTE is not capable of sending OAMPDUs when the receive path is non-operational.
- **Remote Loopback** reports OAM remote loopback support capability:
 - Supported** indicates that the DTE is capable of OAM remote loopback mode.
 - Unsupported** indicates that the DTE is not capable of OAM remote loopback mode.
- **Variable Retrieval** reports variable retrieval capability:
 - Supported** indicates that the DTE supports sending Variable Response OAMPDUs.
 - Unsupported** indicates that the DTE does not support sending Variable Response OAMPDUs.
- **Link Events** reports link event capability:
 - Supported** indicates that the DTE supports interpreting Link Events.
 - Unsupported** indicates that the DTE does not support interpreting Link Events.

Remote Error Event Statistics

- **Date Stamp**¹ indicates the date the last Event Notification OAMPDU frame was received.
- **Time Stamp**¹ indicates the time the last Event Notification OAMPDU event was received by the test equipment.
- **Window**

Symbol Period	Errored symbol Window in second
Frame	Errored frame event Window in second
Frame Period	Errored frame period Window - duration period in number of 64 bytes frames
Frame Seconds	Errored frame seconds summary Window

- **Threshold**

Symbol Period	Errored symbol threshold in second
Frame	Errored frame event threshold in second
Frame Period	Errored frame period threshold in second
Frame Seconds	Errored frame seconds summary threshold in second

- **Error Count**

Symbol Period	The number of symbol errors in Window
Frame	The number of frame event errors in Window
Frame Period	The number of frame period errors in Window
Frame Seconds	The number of frame seconds summary errors in Window

1. **Date Stamp** and **Time Stamp** parameters differ from the 802.3 standard definitions.

➤ **Error Running Total**

Symbol Period	The number of symbol errors since the last reset
Frame	The number of frame event errors since the last reset
Frame Period	The number of frame period errors since the last reset
Frame Seconds	The number of frame seconds summary errors since the last reset

➤ **Event Running Total**

Symbol Period	The number of symbol events since the last reset
Frame	The number of frame events since the last reset
Frame Period	The number of frame period events since the last reset
Frame Seconds	The number of frame seconds events since the last reset

Inject Errored Frames

Generates 5 consecutive packets with FCS errors within a 1 second period.

Logger and Alarms/Errors Logger

The Logger page displays color-coded events and pass/fail verdict.

From the **Test** menu, tap **Results**, and the **Logger** or **Alarms/Errors Logger** tab.

Sort By

Select the sorting order of the event logger entries:

- **ID/Time** (default) displays the event logger entries in numeric ascending order based on the **ID** column of the event logger table.
- **Event** displays the event Logger entries in alphanumeric ascending order based on the **Event** column of the event logger table.

Time Mode

- **Relative** displays the time elapse since the beginning of the test or since the last test reset. The format of the time is Dd HH:MM:SS.
- **Absolute** (default) displays the date and time the event occurred. The time format depends on the FTB-1v2 Pro time settings.

For 24 hours, the time format is MM/DD HH:MM:SS.

For 12 hours, the time format is MM/DD HH:MM:SS <AM or PM>.

Table

The logger table provides the following event logger information.

- **ID**: Indicates the event identification number. The events are sequentially numbered.
- **Time**: Indicates when the event has been detected.
- **Event**: Provides the event type and threshold crossing information.

- **Duration:** Indicates the number of seconds within which the event occurred. Test events like **Test Started** and **Test Stopped** will have no duration.
- **Details:** Provides contextual information including the pass/fail verdict.

The following table displays the nature of information reported by type of event:

Type of Event	Nature of Information
Test Started	Start Date
Test Stopped	Pass/Fail Verdict
Alarm Events	Count value
Error Events	Current Count and Total Count
SDT Events	Service Disruption Time
Threshold Crossing Event	Value at the end of the test

Note: *The Logger table can display up to 500 event entries. Once the Logger table reports 500 event entries, a log full indicator appears and no further entries is possible. However, the events in the Pending state will be updated if the test is still running.*

The Event Logger information will be cleared when:

- the test is reset or started.
- the unit is in suspended mode.
- stopping the current test and navigating to other tests
- the unit is restarted.

Note: *An entry event remains in the Pending state as long as the event is not completed and it is highlighted on a yellow background color.*

Note: *The Threshold Crossing events are displayed in red text color.*

MPLS

From the **Test** menu, tap **Results**, and...

- for **Traffic Gen and Mon**, the **Streams**, and the **MPLS** tab.
- for **Through Mode**, the **Traffic**, and the **MPLS** tab.

Note: For **Dual Port** topology, the **P1** and **P2** buttons allow to respectively display results for port #1 (**P1**) or port #2 (**P2**).

Label 1 and Label 2

The number of MPLS frames transmitted (TX) and received (RX) are displayed for both **Label 1** and **Label 2** for each **Stream**. Not available for **Through Mode** test application.

Total TX/RX MPLS

- **Line Utilization** indicates the percentage of MPLS line rate utilization in TX and RX.
- **Ethernet BW (%)** (Ethernet Bandwidth) indicates the MPLS data rate in TX and RX.
- **Frame Rate (frames/s)** indicates the number of transmitted (TX) and received (RX) MPLS frames.
- **Frame Count** indicates the count of transmitted (TX) and received (RX) MPLS EtherType (0x8847 or 0x8848) frames regardless if FCS is good or not.

OTL-SDT

Note: Only available for parallel interfaces when an OTL defect, at the exception of LOL, is selected for Service Disruption Time (refer to Service Disruption on page 126).

From the **Test** menu, tap **Results**, and the **OTL-SDT** tab.

Service Disruption

Note: Service Disruption results are only available when **Disruption Monitoring** is enabled (refer to BERT on page 124).

Service Disruption is the time during which there is a disruption of service due to the absence of traffic or to the detection of defects per lane.

Disruption Time

- **Defect** indicates on which layer and defect the service disruption time test is performed.
- **Lane** indicates the lane number.
- **Longest (ms)** indicates the longest measured disruption time per lane. **Shortest (ms)** indicates the shortest measured disruption time per lane.
- **Last (ms)** indicates the length of the last measured disruption time per lane.
- **Average (ms)** indicates the average duration of all measured disruption times per lane.
- **Total (ms)** indicates the total duration of all measured disruption times per lane.
- **Count** indicates the number of disruption events detected since the beginning of the SDT test per lane.

Test Results

OTL-SDT

- **Longest Disruption** indicates the longest measured disruption time.
- **Lanes with Disruption** indicates the number of lanes with service disruption.

Note: *When a disruption event is equal or longer than the test period which is fixed to 5 minutes, then the measured disruption time is equal to the test period.*

Performance Monitoring

Note: This tab is only available with Transport test applications with Pattern client.

The Performance Monitoring tab gives error performance events and parameters for the circuit under test.

From the **Test** menu, tap **Results**, and the **Performance Monitoring** tab.

Each button on top of the window represents a level of the analyzed signal for which the Performance Monitoring (PM) is available. Each button also displays the PM standard(s) available for this level. Tap a signal level button to get its PM results.

Analyzed Signal	Standard's availability						
	G.821	G.826 ISM	G.828 ISM	G.829 ISM	M.2100 ISM	M.2100 OOSM	M.2101 ISM
DS3/DS1/E4/E3/E2/E1		X			X		
Section/RS				X			
Line/MS				X			X
VTn/STS-n/AU-n/ TU-n			X				X
BERT	X					X	

Note: G.821 and M.2100 OOSM are only available when **No Pattern Analysis (Live)** check box is cleared (refer to page 124).

Near-End

- **EFS** (Error Free Second) (**G.821**, **G.826**, **G.828**, and **G.829**): Gives the number of seconds within which no error occurred.
- **EC** (Error Count) (**G.821** only): Gives the number of bit errors.
- **EB** (Errored Block) (**G.826**, **G.828**, and **G.829**): Gives the count of blocks in which one or more bits are in error.
- **ES** (Errored Second)

For **G.821**, and **M.2100 OOSM**: Gives the number of seconds within which one or more bit error occurred, or during which Loss Of Signal (LOS) or AIS is detected.

For **G.826**, **G.828**, **G.829**, **M.2100 ISM**, and **M.2101**: Gives the number of seconds within which one or more anomalies (FAS (DSn/PDH), EB, etc.) occurred, or at least one defect occurred.

- **SES** (Severely Errored Second)

For **G.821**, and **M.2100 OOSM**: Gives the number of seconds within which a bit error ratio is $\geq 10^{-3}$, or during which one defect (LOS/AIS) is detected.

For **G.826**, **G.828**, **G.829** and **M.2101**: Gives the number of seconds within which anomalies (FAS (DSn/PDH), EB, etc.) are $\geq X$ percent or at least one defect occurred. X=30 percent for DSn/PDH signals; see the following table for SONET/SDH signals SES threshold.

	OC-1 STS-1e STM-0 STM-0e	OC-3 STS-3e STM-1 STM-1e	OC-12 STM-4	OC-48 STM-16	OC-192 STM-64
Path	30 %	30 %	30 %	30 %	30 %
Line/MS	15 %	15 %	25 %	30 %	30 %
Section/RS	10 %	30 %	30 %	30 %	30 %

For **M.2100 ISM**: Gives the count of the seconds within which anomalies (frame bit errors, CRC block errors, etc.) are $\geq Y$ or at least one defect occurred. Y depends on the type of DS_n/PDH signal as described in the following table.


Signal	SES Threshold
DS1 (SF)	8 frame bit errors (Near-End)
DS1 (ESF)	320 CRC-6 block errors (Near-End) 320 CRC-6 block errors (Far-End, if FDL enabled)
E1 (Framed without CRC-4)	28 frame bit errors (Near-End)
E1 (Framed with CRC-4)	805 CRC-4 block errors (Near-End) 805 E-bit errors (Far-End)
DS3 (M13)	2444 P-bit errors (Near-End) or 5 F-bit errors (Near-End)
DS3 (C-bit Parity)	2444 P-bit errors (Near-End) or 5 F-bit errors (Near-End) 2444 FEBE errors (Far-End)
E2 (Framed)	41 frame bit errors (Near-End)
E3 (Framed)	52 frame bit errors (Near-End)
E4 (Framed)	69 frame bit errors (Near-End)

- **BBE (Background Block Error) (G.826, G.828, G.829, and M.2101)**: Gives the count of Errored Block not occurring as part of a SES.

Test Results

Performance Monitoring

- **UAS (Unavailable Second):** Gives the count of the seconds corresponding to the periods of unavailable time that begins at the onset of 10 consecutive SES events, including these 10 seconds. A period of available time shall begin at the onset of 10 consecutive non-SES events, including these 10 seconds.

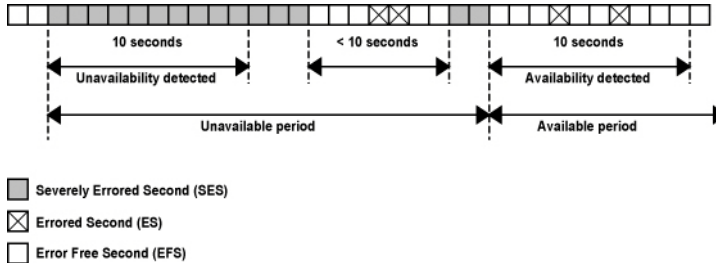

- **ESR (Errored Second Ratio) (G.821, G.826, G.828, and G.829):** Gives the ratio of the number of ES in available time (AS) during a fixed measurement interval.

$$\text{ESR} = \text{ES} \div \text{AS}$$

- **SESR (Severely Errored Second Ratio) (G.821, G.826, G.828, and G.829):** Gives the ratio of the number of SES in available time (AS) during a fixed measurement interval.

$$\text{SESR} = \text{SES} \div \text{AS}$$

- **BBER (Background Block Error Ratio) (G.826, G.828, G.829, and M.2101):** Gives the ratio of BBE in available time (AS) to total blocks in available time during a fixed measurement interval. The count of total blocks excludes all blocks during SESs.
- **DM (Degraded Minutes) (G.821 only):** A Degraded Minute is the number of minutes in which the estimated error rate exceeds 10^{-6} but does not exceed 10^{-3} . DM is determined by collecting all of the Available Seconds, removing any SES grouping the result in 60-second long groups and counting a 60-second long group as degraded if the cumulative errors during the seconds present in the group exceed 10^{-6} .

- **SEP** (Severely Errored Period) (**G.828** only): A sequence between 3 to 9 consecutive SES. The sequence is terminated by a second which is not a SES.
- **SEPI** (Severely Errored Period Intensity) (**G.828** only): Gives the count of SEP events in available time, divided by the total available time in seconds.

Far-End

- **EFS** (Error Free Second): Gives the count of the seconds within which no error occurred or when a defect is detected on the near-end.
- **EC** (Error Count) (**G.821** only): Gives the number of bit errors.
- **EB** (Errored Block) (**G.826**, **G.828**, and **G.829**): Gives the count of blocks in which one or more bits are in error.
- **ES** (Errored Second): For **G.826**, **G.828**, **G.829**, **M.2100 ISM**, and **M.2101**: Gives the count of the seconds within which one or more anomalies (FAS (DSn/PDH), EB, etc.) occurred or at least one defect occurred.
- **SES** (Severely Errored Second)

For G.826, G.828, G.829 and M.2101: Gives the number of seconds within which anomalies (FAS (DSn/PDH), EB, etc.) are $\geq X$ percent or at least one defect occurred. $X=30$ percent for DSn/PDH signals; see the following table for SONET/SDH signals SES threshold.

	OC-1 STS-1e STM-0 STM-0e	OC-3 STS-3e STM-1 STM-1e	OC-12 STM-4	OC-48 STM-16	OC-192 STM-64
Path	30 %	30 %	30 %	30 %	30 %
Line/MS	15 %	15 %	25 %	30 %	30 %
Section/RS	10 %	30 %	30 %	30 %	30 %

Test Results


Performance Monitoring

For M.2100 ISM: Gives the count of the seconds within which anomalies (frame bit errors, CRC block errors, etc.) are $\geq Y$ or at least one defect occurred. Y depends on the type of DS_n/PDH signal as described in the following table.

Signal	SES Threshold
DS1 (SF)	8 frame bit errors (Near-End)
DS1 (ESF)	320 CRC-6 block errors (Near-End) 320 CRC-6 block errors (Far-End, if FDL enabled)
E1 (Framed without CRC-4)	28 frame bit errors (Near-End)
E1 (Framed with CRC-4)	805 CRC-4 block errors (Near-End) 805 E-bit errors (Far-End)
DS3 (M13)	2444 P-bit errors (Near-End) or 5 F-bit errors (Near-End)
DS3 (C-bit Parity)	2444 P-bit errors (Near-End) or 5 F-bit errors (Near-End) 2444 FEBE errors (Far-End)
E2 (Framed)	41 frame bit errors (Near-End)
E3 (Framed)	52 frame bit errors (Near-End)
E4 (Framed)	69 frame bit errors (Near-End)

- **BBE** (Background Block Error) (G.828 and G.829 Line): Gives the count of Errored Blocks not occurring as part of an SES.

- **UAS (Unavailable Second):** Gives the count of the seconds corresponding to the period of unavailable time that begins at the onset of 10 consecutive SES events, including these 10 seconds. A period of available time shall begin at the onset of 10 consecutive non-SES events, including these 10 seconds.

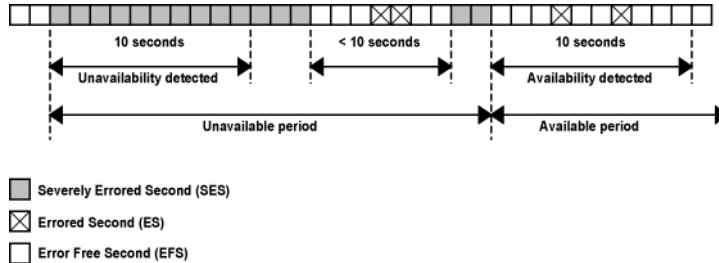

- **ESR (Errored Second Ratio):** Gives the ratio of the number of ES in available time to total seconds in available time during a fixed measurement interval.

$$\text{ESR} = \text{ES} \div \text{AS}$$

- **SESR (Severely Errored Second Ratio):** Gives the ratio of the number of SES in available time to total seconds in available time during a fixed measurement interval.

$$\text{SESR} = \text{SES} \div \text{AS}$$

- **BBER (Background Block Error Ratio):** Gives the ratio of BBE in available time to total blocks in available time during a fixed measurement interval. The count of total blocks excludes all blocks during SESs.

PTP Stats

From the **Test** menu, tap **Results**, and the **PTP Stats** tab.

TX/RX PTP Message Count/Rate

Gives the transmitted/received count and average rate for each PTP message, and the total count for all messages.

TX	RX
Signaling Announce Req ^a Signaling Sync Req ^a Signaling Delay Resp Req ^a Delay Req	Signaling Announce Grant ^a Signaling Sync Grant ^a Signaling Delay Resp Grant ^a Delay Resp Sync Follow Up Announce

- a. The rate value corresponds to an average rate because these messages are only transmitted/received when negotiating or renewing the lease with the Grand Master clock. If the connection with the Grand Master Clock was already established when the test is started, the 0 value is displayed. However, the value becomes available with the next lease renewal which happens every 150 seconds. Only available with G.8265.1 profile.

Note: *In the case where messages are lost while the Receipt Timeout is set to a large value (slow communication), the last valid recorded rate value will be preceded with < to indicate that the reception rate is not stable. This applies to **Delay Resp**, **Announce**, **Sync**, and **Follow UP**.*

Note: *When the rate is above 150 messages/s, > 150 is displayed.*

IPDV

Inter Packet Delay Variation (IPDV) is available for **Sync** and **Delay Req** messages and is measured for all valid in-sequence messages (see *Delay Measurement* on page 427). **Current**, **Average**, **Minimum**, **Maximum**, and **Standard Deviation** measurement values are displayed. The **Standard Deviation** is the measure of the dispersion of messages from its mean. When a value is below 1μ second, **< 1 μ s** is displayed. The pass/fail verdict is also displayed beside the maximum value when enabled.

Quality Level (1588 PTP)

The quality level characterizes the clock quality in terms of network synchronization.

From the **Test** menu, tap **Results**, and the **Quality Level** tab.

- **Last QL Received** indicates the last Quality Level value received. The pass/fail verdict is also displayed when both **QL Mismatch Monitoring** and **Pass/Fail Verdict** check boxes are selected.
- **Last Change** indicates the date and time of the Last QL has changed.
- **QL Mismatch Monitoring** when selected (default) enables the Quality Level mismatch monitoring.

- **Expected QL** allows the selection of the Expected Quality Level value.
Available when the **QL Mismatch Monitoring** check box is selected.

Profile ITU	Quality Level value	PTP Clock Class	Description
G.8265.1	QL-PRS (default)	80	Primary Reference Source Traceable (G.811)
	QL-STU/UNK	82	Synchronized - Traceability Unknown
	QL-PRC	84	Primary Reference Clock Traceable (G.811)
	QL-ST2	86	Traceable to Stratum 2 (G.812 Type II)
	QL-INV3	88	Quality Level Invalid 3
	QL-SSU-A/TNC	90	Type I or V slave clock (G.812) Traceable to Transit Node Clock (G.812 Type V)
	QL-INV5	92	Quality Level Invalid 5
	QL-INV6	94	Quality Level Invalid 6
	QL-SSU-B	96	Type VI slave clock (G.812)
	QL-INV9	98	Quality Level Invalid 9
	QL-ST3E	100	Traceable to Stratum 3E (G.812 Type III)
	QL-EEC2/ST3	102	Ethernet Equipment Clock Option 2 Traceable to Stratum 3 (G.812 Type IV)
	QL-EEC1/SEC	104	Ethernet Equipment Clock Option 1 Synchronous Equipment Clock (G.813 or G.8262, Option 1)
	QL-SMC	106	Traceable to SONET Minimum Clock (G.813 or G.8262, Option 2)
	QL-PROV	108	Provisionable by the Network Operator (PNO)
	QL-DNU/DUS	110	Do Not Use Do Not Use for Synchronization
G.8275.1	QL-PRC/PRS	6, 7, 135, 140	Primary Reference Clock Traceable (G.811)
	QL-SSU-A/ST2	150	Type I or V slave clock (G.812) Traceable to Stratum 2 (G.812 Type II)
	QL-SSU-B/ST3E (default)	160	Type VI slave clock (G.812) Traceable to Stratum 3E (G.812 Type III)

Test Results

Quality Level (1588 PTP)

- **Count** gives the count for each QL code (PTP Clock Class) included in the announce message received.
- **Other** includes all clock class codes (0 to 255) included in the announce message received other than the QL codes (see table above). Refer to page 426 for the complete list.
- **Total** indicates the total count of all QL code messages received.

Quality Level (SyncE)

The quality level characterizes the clock quality in terms of network synchronization.

From the **Test** menu, tap **Results**, and the **Quality Level** tab.

- **Generated QL** indicates the Quality Level value that is generated.
Last Change indicates the date and time of the Generated Quality Level value has changed. For 1GE Electrical interface using **Local Clock** set to **Slave**, the **Last Change** is not available.
- **Last QL Received** indicates the last Quality Level value received. The pass/fail verdict is also displayed when both **QL Mismatch Monitoring** and **Pass/Fail Verdict** check boxes are selected.
Last Change indicates the date and time of the Last QL Received has changed.
- **QL Mismatch Monitoring** when selected (default), enables the Quality Level mismatch monitoring.
- **Expected QL** allows the selection of the Expected Quality Level value. Available when the **QL Mismatch Monitoring** check box is selected.

Quality Level value	SSM	Description
QL-STU/UNK	0	Synchronized - Traceability Unknown
QL-PRS	1	Primary Reference Source Traceable (G.811)
QL-PRC	2	Primary Reference Clock Traceable (G.811)
QL-INV3	3	Quality Level Invalid 3
QL-SSU-A/TNC	4	Type I or V slave clock (G.812) Traceable to Transit Node Clock (G.812 Type V)
QL-INV5	5	Quality Level Invalid 5
QL-INV6	6	Quality Level Invalid 6
QL-ST2	7	Traceable to Stratum 2 (G.812 Type II)

Test Results

Quality Level (SyncE)

Quality Level value	SSM	Description
QL-SSU-B	8	Type VI slave clock (G.812)
QL-INV9	9	Quality Level Invalid 9
QL-EEC2/ST3 (default)	10	Ethernet Equipment Clock Option 2 Traceable to Stratum 3 (G.812 Type IV)
QL-EEC1/SEC	11	Ethernet Equipment Clock Option 1 Synchronous Equipment Clock (G.813 or G.8262, Option 1)
QL-SMC	12	Traceable to SONET Minimum Clock (G.813 or G.8262, Option 2)
QL-ST3E	13	Traceable to Stratum 3E (G.812 Type III)
QL-PROV	14	Provisionable by the Network Operator (PNO)
QL-DNU/DUS	15	Do Not Use Do Not Use for Synchronization

- **QL Mismatch Frame Count** gives the total count of information and/or event frames received not matching the expected Quality Level. Only available when the **QL Mismatch Monitoring** check box is selected.

➤ **TX**

- **Information** gives the count of information frames generated for each Quality Level as well as the total of all Quality Level values. For 1GE Electrical interface using **Slave** as **Master-Slave Clock**, only the count for **QL-DNU/DUS** is reported.
- **Event** gives the count of event frames generated for each Quality Level as well as the total of all Quality Level values. Not available with 1GE Electrical using **Slave** as **Master-Slave Clock**.

➤ **RX**

- **Information** gives the count of information frames received for each Quality Level as well as the total of all Quality Level values.
- **Event** gives the count of event frames received for each Quality Level as well as the total of all Quality Level values.

S-OAM and MPLS-TP OAM

From the **Test** menu, tap **Results**, and the **S-OAM** or **MPLS-TP OAM** tab.

Loopback

- **Status** displays the status of the test function (refer to page 464).
- **TX LBM** indicates the count of transmitted LBM frames.
- **RX LBR** indicates the count of valid LBR frames received. A valid frame for S-OAM has its source MAC address matching the Peer MEP MAC address, destination MAC address matching the unit port MAC address, and VLANs matching the unit port VLANs. A valid frame for MPLS-TP OAM has its destination MAC address matching either the unit MAC address, FF:FF:FF:FF:FF:FF, or 01:00:5E:90:00:00; VLANs matching the unit port VLANs; and MPLS Labels matching the local MPLS Label Stack configuration.

- **LBR Timeout**

For connectivity verification (Continuous check box cleared), indicates the count of LBR Timeout event which occurs if a reply (LBR frame with matching Transaction ID) to a transmitted LBM frame is not received within 5 seconds.

For diagnostic test (Continuous check box selected), indicates the difference between the transmitted LBM frames and the received LBR frames.

- **Invalid LBR**

For connectivity verification (Continuous check box cleared), indicates the count of LBR frames received from the peer MEP with incorrect MEG/MD Level or with an unexpected Transaction ID.

For diagnostic test (Continuous check box is selected), indicates the count of LBR frames received from the peer MEP with incorrect MEG/MD Level.

- **Invalid Payload** indicates the count of received LBR frames having either a TLV type different than the one transmitted, Bit error or wrong data value detected in the data payload of a Data TLV, Bit error, Pattern Loss, or Pattern Type mismatch of a Test TLV.
- **Successful** indicates the count of received LBR frames having no errors.
- **Failed** indicates the count of LBR frames declared as invalid.

Test

- **Status** displays the status of the test function (refer to page 464).
- **TX TST** indicates the count of transmitted TST frames.
- **RX TST** indicates the count of valid TST frames received. A valid frame for S-OAM has its source MAC address matching the Peer MEP MAC address; destination MAC address matching either the unit port Unicast MAC address or a Multicast class 1 address¹; and VLANs matching the unit port VLANs. A valid frame for MPLS-TP OAM has its destination MAC address matching either the unit MAC address, FF:FF:FF:FF:FF:FF, or 01:00:5E:90:00:00; VLANs matching the unit port VLANs; and MPLS Labels matching the local MPLS Label Stack configuration.
- **Invalid TST** indicates the count of TST frames received from the peer MEP with incorrect MEG/MD level.
- **Invalid Payload** indicates the count of received TST frames having either an unsupported pattern type, or bit error / pattern loss detected in the payload.
- **Successful** indicates the count of received TST frames having no errors.
- **Failed** indicates the count of TST frames declared as invalid.

1. Refer to *Unicast/Multicast Addresses for Ethernet OAM* on page 678 for more information.

Test Results

S-OAM and MPLS-TP OAM

Frame Delay

- **Status** displays the status of the test function (refer to page 464).
- **TX DMM** indicates the count of transmitted DMM frames.
- **RX DMR** indicates the count of valid DMR frames received. A valid frame for S-OAM has its source MAC address matching the Peer MEP MAC address; destination MAC address matching the unit port MAC address; and VLANs matching the unit port VLANs. A valid frame for MPLS-TP OAM has its destination MAC address matching either the unit MAC address, FF:FF:FF:FF:FF:FF, or 01:00:5E:90:00:00; VLANs matching the unit port VLANs; and MPLS Labels matching the local MPLS Label Stack configuration..
- **Invalid DMR** indicates the count of received DMR frames from the peer MEP having an incorrect MEG/MD Level, an incorrect Test ID (when applicable), or with a valid MEG/MD Level and valid Test ID (when applicable) but with a Frame Delay outside the 0.001 to 8000.000 ms range.
- **Delay (ms): Current** indicates the average of frame delay measured in the last second. **Minimum**, **Maximum**, and **Average** indicates respectively the minimum, maximum, and average frame delays measured since the beginning of the test.
- **Successful** indicates the count of received DMR frames having no errors.
- **Failed** indicates the count of DMR frames declared as invalid.

Frame Loss

- **Status** displays the status of the test function (refer to page 464).
- **TX LMM** indicates the count of transmitted LMM frames.
- **RX LMR** indicates the count of valid LMR frames received. A valid frame for S-OAM has its source MAC address matching the Peer MEP MAC address; destination MAC address matching the unit port MAC address; and VLANs matching the unit port VLANs. A valid frame for MPLS-TP OAM has its destination MAC address matching either the unit MAC address, FF:FF:FF:FF:FF:FF, or 01:00:5E:90:00:00; VLANs matching the unit port VLANs; and MPLS Labels matching the local MPLS Label Stack configuration.
- **Invalid LMR** indicates the count of LMR frames received from the peer MEP with incorrect MEG/MD level.
- **Frame Loss** is calculated (count and %) for both Near-End and Far-End over all valid LMR frames received.
- **Successful** indicates the count of received LMR frames having no errors.
- **Failed** indicates the count of LMR frames declared as invalid.

Synthetic Loss

Note: *Only available with Ethernet OAM.*

- **Status** displays the status of the test function (refer to page 464).
- **TX SLM** indicates the count of transmitted SLM frames.
- **RX SLR** indicates the count of valid SLR frames received. A valid frame has its source MAC address matching the Peer MEP MAC address; destination MAC address matching the unit port MAC address; and VLANs matching the unit port VLANs.
- **Invalid SLR** indicates the count of SLR frames received from the peer MEP with incorrect MEG/MD level, incorrect source MEP ID, or incorrect Test ID.
- **Synthetic Loss** is calculated (count and %) for both Near-End and Far-End over all frames received and is updated after each Synthetic Loss measurement period (after receiving the defined **Frame Count**, refer to page 245).
- **Successful** indicates the count of received SLR frames having no errors.
- **Failed** indicates the count of SLR frames declared as invalid.

Service Configuration - Burst

From the **Test** menu, tap **Results**, **Service Configuration**, and the **Burst** tab.

Service Name and Selection

Service Name indicates the name of the selected service.

Select the service to be displayed by either using the left/right arrow or by tapping over the service numbers area then tapping on a specific service number. An orange background indicates the selected service while a green background indicates the services that are enabled.

Committed/Excess

- **Committed - Burst test** is the CBS subtest.
- **Excess - Burst test** is the EBS subtest.
- **Direction**, available with **Dual Test Set** or **Dual Port** topology, indicates respectively results from local to remote (**L->R**) and remote to local (**R->L**), or P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**).
- **Burst Size** indicates the size in bytes of the burst used for each subtest.
- **SLA Verified** indicates the committed SLA parameters that are used to declare the pass/fail verdict. See *Summary (EtherSAM)* on page 434 for more information on **Frame Loss**, **Max Jitter**, **Round-Trip Latency**, **Max Latency**, and **Max RX Rate**.
- **Informational** parameters are for information purpose only, they are not included in the test pass/fail verdict. See *Summary (EtherSAM)* on page 434 for more information on **Frame Loss Rate**, **Max Jitter**, **Max Latency**, and **Round-Trip Latency**.
- **Average RX Rate** indicates the measured average utilization throughput for the CBS subtest.

Service Configuration - Ramp

From the **Test** menu, tap **Results**, **Service Configuration**, and the **Ramp** tab.

Service Name and Selection

Service Name indicates the name of the selected service. Select the service to be displayed by either using the left/right arrow or by tapping over the service numbers area then tapping on a specific service number. An orange background indicates the selected service while a green background indicates the services that are enabled.

Committed/Excess Steps

- **Committed Steps** indicate the pre CIR and CIR steps specified in the ramp configuration.
- **Excess Steps** indicate the **CIR+EIR** and **Traffic Policing** steps specified in the ramp configuration.
- **Direction**, available with **Dual Test Set** or **Dual Port** topology, indicates respectively results from local to remote (**L->R**) and remote to local (**R->L**), or P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**).
- **TX Rate** indicates the transmission rate for each step.
- **SLA Verified** indicates the committed SLA parameters that are used to declare the pass/fail verdict. See *Summary (EtherSAM)* on page 434 for more information on **Frame Loss Rate**, **Max Jitter**, **Round-Trip Latency**, and **Max RX Rate**.

- **Informational** parameters are for information purpose only, they are not included in the test pass/fail verdict. See *Summary (EtherSAM)* on page 434 for more information on **Frame Loss**, **Max Jitter**, and **Round-Trip Latency**.
- **Average RX Rate** indicates the measured average utilization throughput for each step.

Service Performance

From the **Test** menu, tap **Results**, and the **Service Performance** tab.

Service Name and Selection

Service Name indicates the name of the selected service.

Select the service to be displayed by either using the left/right arrow or by tapping over the service numbers area then tapping on a specific service number. An orange background indicates the selected service while a green background indicates the services that are enabled.

SLA Parameters

The configured **CIR**, **Max Jitter**, **Frame Loss Rate** and **Max Latency/Max Round-Trip Latency** SLA parameters are displayed. Refer to *Services - Profile* on page 249 for more information. For **Dual Test Set** or **Dual Port** topology, parameters are displayed respectively for both local to remote (**L->R**), remote to local (**R->L**) directions, or P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**).

Metrics

Current, **Average**, **Minimum**, **Maximum**, and **Estimate (Jitter)** measured values for each metric are reported. **Direction**, available with **Dual Test Set** or **Dual Port** topology indicates respectively results from local to remote (**L->R**) and remote to local (**R->L**), P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**), and Round-Trip for Latency when in Round-Trip Latency Measurement Mode (see *Global Options* on page 147). For **Dual Test Set**, results for remote to local are obtained at the end of each step.

- **RX Rate** indicates the measured utilization throughput.
- **Jitter (ms)** indicates the measured delay variation.
- **Latency (ms)** indicates the measured round-trip latency (delay).

Note: For the **Current** value, 0 is displayed when no RX rate has been measured in the last second.

Note: Delay variation measurements smaller than 15 μ s will be discarded, not used for the sampling process, and < **0.015** is displayed as the minimum value. For the **Current** value, **Not measurable** is displayed when no delay has been measured in the last second

Errors

For **Dual Test Set**, errors are reported for both local to remote (**L->R**) and remote to local (**R->L**). For **Dual Port** topology, errors are reported for both P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**).

- **Frame Loss** indicates that a sequence number is missing in the received frames. The pass/fail verdict when enabled reports only the verdict when it is fail. **Seconds**, **Count**, and **Rate** values are reported.
- **Out-of-Sequence** indicates that the received frame sequence number is either smaller than the expected frame sequence number or is a duplicate number. The Out-Of-Sequence will not be considered in the global verdict. **Seconds**, **Count**, and **Rate** values are reported.

RX Frame Count

The **RX Frame Count** indicates the number of frames received matching the selected service ID. For **Dual Test Set**, the count is reported for both local to remote (**L->R**) and remote to local (**R->L**). For **Dual Port** topology, the count is reported for both P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**).

Streams - Frame Loss / Out-of-Sequence

From the **Test** menu, tap **Results**, **Streams**, and the **Frame Loss / Out-Of-Sequence** tab.

- The **P1** and **P2** buttons, available with **Dual Port** topology, allow to respectively display results for port #1 (**P1**) or port #2 (**P2**).
- **Stream**: Indicates the stream identification number.
- **Thresholds** button allows to set the pass/fail thresholds (refer to *QoS Metrics* on page 289).
- **Frame Loss**: See *QoS Metrics* on page 347.
- **Out-Of-Sequence**: See *QoS Metrics* on page 347.

Streams - Jitter

From the **Test** menu, tap **Results**, **Streams**, and the **Jitter** tab.

- The **P1** and **P2** buttons, available with **Dual Port** topology, allow to respectively display results for port #1 (**P1**) or port #2 (**P2**).
- **Stream**: Indicates the stream identification number.
- **Jitter (ms)** is measured for each stream on all valid frames (in-sequence frames, valid Jitter tag, and no FCS error) received. **Current**, **Average**, **Minimum**, **Maximum**, and **Estimate** delay values are reported.

Note: *Delay variation measurements smaller than 15 μ s will be discarded, not used for the sampling process, and “< 0.015” will be displayed as the minimum value. For the **Current** value, **Not measurable** is displayed when no delay has been measured in the last second.*

- **Thresholds** button allows to set the pass/fail thresholds (refer to *QoS Metrics* on page 289).

Streams - Latency

From the **Test** menu, tap **Results**, **Streams**, and the **Latency** tab.

- The **P1** and **P2** buttons, available with **Dual Port** topology, allow to respectively display results for port #1 (**P1**) or port #2 (**P2**).
- **Stream**: Indicates the stream identification number.
- **Latency (ms)** is measured for each stream on all valid frames (valid Latency tag, expected originator identifier value, and no FCS error) received. **Current**, **Average**, **Minimum**, and **Maximum** round-trip latency (delay) are reported.

Note: *Latency statistics are only available in loopback test topology.*

Note: *Delay measurements smaller than 15 μ s will be discarded, not used for the sampling process, and **< 0.015** will be displayed. For the **Current** value, **Not measurable** is displayed when no delay has been measured in the last second.*

- **Thresholds** button allows to set the pass/fail thresholds (refer to *QoS Metrics* on page 289).

Streams - Throughput

From the **Test** menu, tap **Results**, **Streams**, and the **Throughput** tab.

- The **P1** and **P2** buttons, available with **Dual Port** topology, allow to respectively display results for port #1 (**P1**) or port #2 (**P2**).
- **Stream** indicates the stream identification number.
- **TX Rate** indicates the transmitted throughput rate.
- **RX Rate** is measured for each stream on all valid frames (valid Throughput tag with no FCS error). **Current**, **Average**, **Minimum**, and **Maximum** throughput results are reported. Refer to *Unit* on page 282 for unit selection.

Note: A **Current** value of **0** indicates that no RX rate has been measured in the last second.

- **Total** indicates the total TX and current measured RX throughput of all valid frames (valid Throughput tag with no FCS error).
- **Thresholds** button allows to set the pass/fail thresholds (refer to *QoS Metrics* on page 289).

Summary

Note: *Available with Transport, Ethernet (EtherBERT, Through Mode, Smart Loopback), and Wireless test applications. For other test applications see the corresponding test summary page.*

From the **Test** menu, tap **Results**, and the **Summary** tab.

- **Global** (default), **P1**, and **P2** buttons, available with **Dual Port** topology, allow to respectively display a brief test summary for both ports or a full summary for either port #1 (**P1**) or port #2 (**P2**).
- **Status** indicates the actual test status as follows.
 - “--”: The test is not running or results are not available.
 - **In Progress**: The test is running.
 - **Completed**: The test is completed, stopped at the planned time, or manually stopped when there is no set timer.
- **Start Time** indicates the date and time the test was started. The date and time is reset every time the test is restarted or reset.
- **Test Recovery** when displayed, indicates that the test has automatically recovered from a power failure. The number of occurrences is also displayed next to the **Test Recovery** field. Refer to *Power Failure Recovery* on page 599.
- **Logger Full**, when displayed, indicates that the logger is full. Refer to *Logger and Alarms/Errors Logger* on page 384.

Test Results

Summary

Interface

Note: Only available with CPRI/OBSAI Unframed test application.

➤ **Alarms**

LOS indicates that there is no input signal.

➤ **Errors**

CV (Code Violation) indicates that invalid 10B code word are received.

BERT and Multi-Pattern BER

Note: See BER on page 314 for a description of each alarm/error.

Note: For Multi-Pattern, alarms/errors are available for each pattern. An arrow in front of a specific pattern indicates the pattern that is currently generated/analyzed. **All** represents the sum of alarms/errors as well as the consolidated rate for all patterns.

- **Receiving Live Traffic - RX Pattern Analysis Disabled** when displayed, indicates that the **No Pattern Analysis (Live)** check box is selected and in this case no other information/statistics are available.
- **BER Threshold** is available when **Pass/Fail Verdict** is enabled¹.
- **Restart Sequence** button, available with multi-pattern, clears results and restarts the multi-pattern sequence with the first enabled pattern in the list. This is the only way to restart the multi-pattern sequence and to allow synchronization between two test sets.

For back-to-back testing using two test sets, create a multi-pattern test on both units, tap the **Restart Sequence** button on each unit within 5 seconds apart. Once synchronized, start the test on each unit.

1. Refer to *BERT* on page 124 or *EtherBERT*, *FC BERT*, *BERT (CPRI)*, and *Unframed BERT* on page 137.

- **Bit/Pattern Error Rate/Count** graphically displays a meter representing either the bit/pattern error rate or the bit/pattern error count depending on the Pass/Fail Verdict selection¹.

When the verdict is enabled¹, the values under the threshold are presented in green while the values above are in red.

When the verdict is disabled, the bit/pattern error rate is displayed in blue.

The arrow pointer indicates the current received bit/pattern error rate/count.

The Pass/Fail verdict is displayed just on top of the meter when enabled¹.

- **Bit/Pattern Error, Amount/Rate, and Inject:** The bit/pattern error injection and settings are coupled with the *Inject Button* on page 368. For Transport test applications, not available in Through modes or with Multi-Pattern.

Service Disruption

Note: *Service Disruption results are only available with Transport, CPRI, and EtherBERT test applications when **Disruption Monitoring** is enabled (refer to BERT on page 124 or EtherBERT, FC BERT, BERT (CPRI), and Unframed BERT on page 137). When Service Disruption is disabled, the message **Service disruption monitoring disabled** is displayed.*

Service Disruption is the time during which there is a disruption of service due to the detection of defects.

➤ Disruption Time

Note: *For OTL defects, at the exception of LOL, the disruption time is displayed for the lane having the longest disruption time. See OTL-SDT on page 387 for results per lanes.*

Longest (ms): Indicates the longest measured disruption time.

Shortest (ms) indicates the shortest measured disruption time.

Last (ms) indicates the length of the last measured disruption time.

Average (ms) indicates the average duration of all measured disruption times.

Total (ms) indicates the total duration of all measured disruption times.

- **Defect**, available with Transport test applications, indicates on which layer and defect the service disruption time test is performed. For OTL defect (parallel interface) also indicates within parenthesis the lane number having the longest disruption time.
- **Disruption Count:** Indicates the number of disruption events detected since the beginning of the SDT test.

Note: *When a disruption event is equal or longer than the test period which is fixed to 5 minutes, then the measured disruption time is equal to the test period.*

- **SDT Threshold (ms)** allows to enter the SDT threshold value that will be used to declare the pass/fail verdict: 0.005 to 299999.995 ms in step of 0.005 ms (default is **50** ms). This setting is only accessible when Pass/Fail Verdict is enabled and is coupled with the SDT Threshold set from the test setup (refer to page 128).

Traffic / Traffic Ethernet

Note: *The **Traffic** statistics are available for Smart Loopback and, Through Mode test applications. See Traffic - Ethernet on page 477 for more information.*

CPRI

Note: *Available with CPRI Framed L2.*

- **Sequence** indicates the last Sequence State parameter: **Standby (A)**, **L1 Sync (B)**, **Protocol (C)**, **L2 C&M (D)**, **Vendor (E)**, **Operation (F)**, and **Passive (G)**. The pass/fail verdict is also displayed when enabled.
- **Frame Sync** indicates that the startup sequence synchronization status as per L1 Sync Status parameter: active (green) or inactive (red).
- **Protocol** indicates either the last received (**Version 1** or **Version 2**) or negotiated (**Auto**) protocol version. A red background indicates a Protocol version mismatch.
- **C&M** indicates either the received (HDLC or Ethernet) or negotiated (Auto) C&M for Ethernet subchannel and HDLC rates in Mbit/s. A red background indicates either a C&M type mismatch or HDLC Rate/Ethernet subchannel mismatch. An arrow is displayed indicating which C&M Channel, Ethernet or HDLC, is selected following the negotiation process.

Test Results

Summary

- **Code Word (CW)** indicates the transmitted and received Code Word count.
- **Hyperframe** indicates the transmitted and received hyperframe count.
- **L1 Reset**, available when **Remote Radio Head** emulation mode is selected, indicates the number of times a request to reset the RRH interface was received.

RX Frequency

Note: *RX Frequency is available for Through Mode test application on both ports (**Port 1** and **Port 2**) for rates up to 10G LAN. Not available for a port using an active copper SFP.*

- **Frequency (GHz)** indicates the frequency of the input signal.
- **Offset (ppm)** indicates the frequency offset between the standard rate specification and the rate at the input signal.

Note: *For both **Frequency** and **Offset** the following background colors are used.*

Background color	Description
Green	The frequency is in range.
Red	The frequency is out-of-range. LOC is also displayed.
Gray	Pending state.

Summary (1588 PTP)

From the **Test** menu, tap **Results**, and the **Summary** tab.

- **Test Status** displays the current status of the 1588 PTP test. The global test pass/fail verdict is displayed next to the **Test Status** field when enabled (see *Pass/Fail Verdict* on page 123).

Test Status	Description
--	Idle state, the test is not running or results are not available.
In Progress	The test is running.
Completed	The test is completed, stopped at the planned time, or manually stopped when there is no set timer.
Aborted	The test is interrupted; stopped before the set timer. For G.8265.1: [Message type] Request Denied , Session Canceled , or No Reply is displayed next to Aborted when applicable. For G.8275.1: Sync Message Rate Changed is displayed next to Aborted when applicable.

- **Start Time** indicates the date and time the test was started. The date and time is reset every time the test is restarted or reset.
- **Test Recovery** when displayed, indicates that the test has automatically recovered from a power failure. The number of occurrences is also displayed next to the **Test Recovery** field. Refer to *Power Failure Recovery* on page 599.
- **Logger Full**, when displayed, indicates that the logger is full. Refer to *Logger and Alarms/Errors Logger* on page 384.

Test Results

Summary (1588 PTP)

➤ Negotiation Status

The status of the PTP Negotiation is displayed while in Unicast negotiation (available with G.8265.1 profile).

Negotiation Status	Description	Background Color ^a
Request Granted	All the Signaling request types have been granted.	Green
[Message type] Request Denied	The Signaling grant message has not been granted.	Red
Session Canceled	The Grand Master has canceled the Unicast session.	Red
No Reply	No message is received from the Grand Master following transmission of 3 Signaling requests for a message type. Make sure that both IP address and Domain (refer to <i>1588 PTP</i> on page 117) of the Grand Master Clock are valid as well as the IP address of the unit's port used to connect on the network (refer to <i>Network</i> on page 198).	Red
Pending	Unicast negotiation has started and no message has been received from the Grand Master.	Gray
Inactive	The Unicast negotiation is not active.	Gray

a. The gray background color is also used for a Link Down.

➤ **GM Info**

Note: *Only available when Grand Master clock information is available.*

The Grand Master Information window displays the decoded clock information.

For G.8265.1 only:

- **Identity** reports the 8-byte identification code of the Grand Master Clock.

For G.8275.1 only:

- **Port Identity** reports the identity type of the PTP port.
- **GM Identity** reports the clock identity of the Grand Master Clock.
- **Priority 1** reports the priority 1 attribute of the Grand Master Clock.
- **Priority 2** reports the priority 2 attribute of the Grand Master Clock.
- **Steps Removed** reports the number of communication paths crossed between the local clock and the Grand master Clock.
- **Log Message Interval (Announce)** reports the mean time interval between successive Announce messages.
- **Log Message interval (Sync)** reports the mean time interval between successive Sync messages.

Test Results

Summary (1588 PTP)

For both G.8265.1 and G.8275.1:

- **Clock Class** reports the description and code of the Grand Master Clock Class.

Code	Description
0-5, 8-12, 15-51, 53-57, 59-67, 123-132, 171-186, 188-192, 194-215, 233-247, 249-254	Reserved
6	Sync to primary reference
7, 14	Holdover
13	Sync to application-specific reference
52, 58, 187, 193	Degraded
68 to 79, 81-109 (odd values), 11-122, 133-170, 216-232	Alternate PTP profiles
80-110 (even values) ^a	Quality Level (QL-xxx ^a)
248	Default
255	Slave only

a. Refer to QL table on page 399 for the list of Quality Level values that will be used as the description.

- **Clock Mode** reports the description of the Grand Master Clock Mode: **Two-step** or **One-step**.
 - **Clock Accuracy** reports the accuracy of the clock.
 - **Time Source** reports the source of time used by the Grand Master Clock.
-
- **Start Time** indicates the time the test was started.

Delay Measurement

- **Sync IPDV** meter displays the average of the inter packet delay variation of consecutive Sync messages in the last second. The value and the pass/fail verdict is also displayed when enabled.
- **Delay Req IPDV** meter displays the average of the inter packet delay variation of consecutive Delay Req messages in the last second. The value and the pass/fail verdict is also displayed when enabled.

Note: When a value is below 1 μ second, “< 1 μ s” is displayed.

Note: When the Pass/Fail verdict is enabled, the green region is delimited from 0 to the IPDV Threshold (refer to Alarm Timeout/Threshold on page 122) corresponding to a **PASS** verdict. The red region beyond the threshold corresponds to a **FAIL** verdict. There is neither green nor red region when the Pass/Fail verdict is disabled.

Quality Level

- **Last QL Received** indicates the last Quality Level received. The pass/fail verdict is also displayed when both **QL Mismatch Monitoring** and **Pass/Fail Verdict** check boxes are selected.
- **Last Change** indicates the date and time of the Last QL change.

Total PTP Messages

Gives respectively the total count of transmitted (TX) and received (RX) PTP messages.

Test Results

Summary (Cable Test)

Summary (Cable Test)

From the **Test** menu, tap **Results**, and the **Summary** tab.

Test Status

Test Status indicates the progress of the cable test as follows:

- **Idle** (test has not started)
- **In Progress**
- **Completed**

The Pass/Fail verdict is displayed next to the **Test Status** field, when enabled, based on the following criteria: The worst pair's **Wire Map**, **Prop. Delay**, **Delay Skew**, and **Length**.

Start Time

Indicates the date and time the test was started. The date and time is reset every time the test is restarted or reset.

Cable

Note: *When no value is available, "--" is displayed.*

- **Wire Map** indicates the Wire Map result for the pair having the worst Wire Map. The distance to fault is also displayed when a fault is identified. The Pass/Fail verdict is also displayed, when enabled.
- **Prop. Delay (ns)** indicates the propagation delay value for the pair having the longest propagation delay. The Pass/Fail verdict is also displayed when enabled.

- **Delay Skew (ns)** indicates the delay skew value for the pair having the worst delay skew. The Pass/Fail verdict is also displayed when enabled. The Delay Skew result is only available for 1000 Base-T interface when the link is up.
- **Length (m/ft)** indicates the length for the pair having the worst cable length value. The Pass/Fail verdict is also displayed when enabled.

Pairs

Note: When no value is available, "--" is displayed.

- **Pair** indicates the pair number.
- **Pins** indicates the pair's pin numbers and color of each wire corresponding to the selected wiring standard.

W-BL	White-Blue
BL	Blue
W-O	White-Orange
O	Orange
W-G	White-Green
G	Green
W-BR	White-Brown
BR	Brown

Test Results

Summary (Cable Test)

- **Wire Map Test Result** gives the wire map test result for each pair. When the link is up: The wire map result for each pair is given as seen by the 700Gv2/800v2/890 Series to get a link up. This means that the wire map result may not correspond to the type of cable tested depending on the cable(s) used and/or the configuration of the cable mode (MDI, MDIX, or auto-detection) on both the 700Gv2/800v2/890 Series and the far end equipment. For example, two crossed pair cables end to end used between the 700Gv2/800v2/890 Series and a far end equipment may give a straight pair (MDI) wire map result.

MDI	Straight pair.
MDIX	Crossed pair.
MDI (-)	For 1 Gbit/s, straight pair with swapped wires within pair.
MDIX (-)	For 1 Gbit/s, crossed pair with pair A swapped with pair B and/or pair C swapped with pair D.
Noise	Excessive noise on a pair most likely caused by a link partner running in 10/100 Mbit/s forced mode. In this case, no propagation delay or length is reported and there is no comparison with any threshold.

Note: For 1 Gbit/s, both MDI and MDIX can be reported simultaneously since crossed pairs detection is performed independently for pairs A-B and C-D.

When the link is down:

Short	Short-circuit between Tip and Ring wires of a pair or Tip or ring wire of a pair is connected with an alien wire grounded.
Open	No cable plugged in, remote end open, or either one or two wires of a pair are not connected.
Short-between-pairs	Short between one or two wires of a pair with one or two wires of another pair. Short between more than two pairs, including one or two wires for each pair.
Noise	Excessive noise on a pair most likely caused by a link partner running in 10/100 Mbit/s forced mode. In this case, no distance is reported and there is no comparison with any threshold.
Unknown	No fault has been identified but the link is down. To maximize the cable test result, it is preferable to have the far end equipment powered up.

If the determined **Wire Map** is either **MDI**, **MDIX**, **MDI (-)**, **MDIX (-)**, or **Noise** (Link up), the test is declared as **PASS**. If the determined Wire Map is either **Short**, **Short-between-pair**, **Open**, **Noise** (Link down), or **Unknown**, the test is declared as **FAIL**.

Note: Refer to Ethernet Cables on page 646 for cable pinout.

- **Distance To Fault (m/ft)** gives the distance to fault from the near end for each pair, unless the problem is due to excessive noise. Noise may be due to electrical noise causing communication error.
- **Prop. Delay (ns)** indicates the propagation delay of a signal through each pair.
- **Length (m/ft)** indicates the cable length of each pair.

Test Results

Summary (Cable Test)

PoE

Note: Not available on 890 and 890NGE (100G).

Detection/Classification

- **Power Presence** indicates on which cable pairs (refer to **Wiring Standard** on page 129) the power is received and the polarity of each pair. Result is presented as follows:

Power Presence	Description
Pos: <pair>; Neg: <pair>	PSE applies power on 2 pairs.
Pos: <pair>, <pair>; Neg: <pair>, <pair>	PSE applies power on all pairs.
No power detected	No power over Ethernet was detected.

- **PSE Type** indicates the detected PSE type.
- **Granted Power Class** indicates the power class provided by the PSE:

Granted power Class	Description
0	Class 0 (13.0W)
1	Class 1 (3.8W)
2	Class 2 (6.5W)
3	Class 3 (13.0W)
4	Class 4 (25.5W)
None	The PSE denied power.

The Pass/Fail verdict is also displayed when enabled.

Operation

Note: *The following results are only reported when the classification succeeded.*

- **Unloaded Voltage (V)** indicates the measured voltage when no load is applied. A value less than 5 is reported as **<5.0** and a value greater than 59 is reported as **>59.0**.
- **Loaded Voltage (V)** indicates the measured voltage by applying a load corresponding to the configured power class. A value less than 5 is reported as **<5.0** and a value greater than 59 is reported as **>59.0**. The Pass/Fail verdict is also displayed when enabled.
- **Current (mA)** indicates the current which is calculated based on the measured **Loaded Voltage** and the applied load.
- **Power (W)** indicates the power in watt which is calculated based on the measured **Loaded Voltage** and **Current**.

Test Results

Summary (EtherSAM)

Summary (EtherSAM)

From the **Test** menu, tap **Results**, and the **Summary** tab.

Note: For **Dual Test Set**, only **Start Time** is displayed on the remote module.

- **Service Configuration/Performance Test Status** indicates the actual test status as follows:

Test Status	Description
"--"	Test has not started.
Disabled	Test/subtests is/are disabled.
Running	Test/subtest is currently running.
Data Transfer	Test/subtest is running but no test traffic is being transmitted.
Completed, <Verdict>	Test/subtest has completed with the test pass/fail verdict. A fail verdict is declared when a Link Down or LOS is detected, or when any SLA parameter fails.
Aborted, <reason>	Test/subtest has been aborted either manually (Stop) or automatically from an alarm and the reason why the test has been aborted is also displayed as follows: Link down alarm, LOS alarm, Timeout during execution, DTS connection failed, Loss of remote connection (DTS), LOPPS-L Alarm^a, LOPPS-R Alarm^a, LOPPS-L / LOPPS-R Alarm^a, Unresolved addresses, No test enabled, Invalid Burst Configuration, CIR disabled for all services, Excessive Refill Time^b, Stopped

- a. Available for **Dual Test Set** in **One-Way Latency** measurement mode.
- b. An excessive refill occurs when the pre-burst and/or post-burst duration last for more than 2 seconds.

- **Start Time** indicates the date and time the test was started. The date and time is reset every time the test is restarted.
- **Remote unit in use and locked for Dual Test Set** indicates that this module is used for **Dual Test Set** as the remote module.

- **Remote unit in Dual Test Set Mode** indicates that this module is set as remote but the DTS Connection is not established.
- **Service Configuration/Performance Test:** Tap **Service Configuration Test** or **Service Performance Test** button to view the result summary of the corresponding test.
 - **Service** indicates the service's number and name. For **Service Configuration Test**, the number/name is highlighted in red per service when VLAN mismatch occurred; in **Dual Test Set** or **Dual Port** topology, the direction is also highlighted; in Dual Test Set, the **R -> L** direction label is gray when **VLAN Preservation** is not supported by the remote module.
 - **Direction**, available with **Dual Test Set** or **Dual Port** topology, indicates respectively results from local to remote (**L->R**) and remote to local (**R->L**), or P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**).
 - **Service Performance Test** column displays the pass/fail verdict icon indicating if the service complies to the configured SLA parameters.
 - **Service Configuration Test** column displays the pass/fail verdict icon indicating if the service complies to the configured SLA parameters.

Test Results

Summary (EtherSAM)

Committed

- **Frame Loss Rate** indicates the rate of frames that are lost. The reported value is the maximum rate of Frame Loss from all burst sequences and ramp steps excluding the **CIR+EIR**, **EBS**, and **Traffic Policing** steps. Frame Loss is displayed as a percentage value when the remote module does not support exponential notation.
- **Max. Jitter (ms)** indicates the maximum measured delay variation.
- **Max Latency (ms)** indicates the maximum measured round-trip latency (delay). For Dual Test Set the local to remote and remote to local values are reported for One-Way Latency Measurement Mode while a single round-trip value is reported for Round-Trip Latency Measurement Mode (see *Global Options* on page 147).
- **Avg RX Rate**, for **Service Performance Test**, indicates the measured average utilization throughput.

Excess

- Max RX Rate**, for **Service Configuration Test**, indicates the measured maximum utilization throughput.
- **VLAN Preservation** indicates if any VLAN mismatch occurred during any step of a Ramp or Burst tests as follows:
 - Grey: Undefined
 - Green: No Mismatch detected
 - Red: Mismatch detected

Summary (FC BERT)

From the **Test** menu, tap **Results**, and the **Summary** tab.

- **Test Status** indicates the actual test status as follows.
 - “--”: The test is not running or results are not available.
 - **In Progress**: The test is running.
 - **Completed**: The test is completed, stopped at the planned time, or manually stopped when there is no set timer.

Once the test is stopped, the test pass/fail verdict is displayed next to the **Status** field when enabled. The verdict is Pass when all verdicts are Pass, the verdict is Fail as soon as one of the verdict is Fail. Refer to *Bit/Pattern Error* on page 138 and *Latency Tag Insertion* on page 140 for more information.

- **Start Time** indicates the date and time the test was started. The date and time is reset every time the test is restarted or reset.
- **Test Recovery** when displayed, indicates that the test has automatically recovered from a power failure. The number of occurrences is also displayed next to the **Test Recovery** field. Refer to *Power Failure Recovery* on page 599.
- **Logger Full**, when displayed, indicates that the logger is full. Refer to *Logger and Alarms/Errors Logger* on page 384.

Test Results

Summary (FC BERT)

BER

Note: See BER on page 314 for a description of each alarm/error.

- **BER Threshold** is available when **Pass/Fail Verdict** is enabled (refer to page 138).
- **Bit Error Rate/Count** graphically displays a meter representing either the bit error rate or the bit error count depending on the Pass/Fail Verdict selection (refer to page 138).

When the verdict is enabled, the values under the threshold are presented in green while the values above are in red.

When the verdict is disabled, the bit error rate is displayed in blue.

The arrow pointer indicates the current received bit error rate/count.

The Pass/Fail verdict is displayed just on top of the meter when enabled.

- **Bit Error and Rate/Amount**
 - **Manual** allows to enter the amount of manual error to be generated: **1** (default) through **50**.
 - **Rate** allows the selection of the injection rate for the selected error.
 - **Max Rate** generates the selected error to its theoretical maximum rate.
- **Inject** generates, if the test is running, the amount of bit error configured.

Round-Trip Latency

- **Round Trip Latency (ms)** is measured for each local and remote port.
Current, **Average**, **Minimum**, and **Maximum** indicates respectively the current, average, minimum, and the maximum round trip latency from the local to the remote port in the last one second. The pass/fail verdict is also displayed for the maximum round trip latency.
Samples indicates the number of samples used for the round trip latency.
- **Estimated BB_Credit** indicates the estimated number of packets that can be transmitted on the optical line at the same time.
- **Round-Trip Latency Threshold (ms)** sets the round trip latency threshold: **0.015** to **8000 ms** (default is **15**). This setting is only available when both **Latency Tags** and **Pass/Fail Verdict** check boxes are selected (refer to *Latency Tag Insertion* on page 140).

Traffic

- **Line Utilization (%)** indicates the current percentage of the transmitting/receiving line rate utilization.
- **Frame Rate (frame/s)** indicates the current transmitted/received number of frames (including frame with error and aborted frames) in frame per second.
- **Byte Count** indicates the total number of transmitted/received bytes including the frame delimiters.
- **Frame Count** indicates the total number of transmitted/received frames including link service control frames.

Test Results

Summary (iOptics)

Summary (iOptics)

From the **Test** menu, tap **Results**, and the **Summary** tab.

Start Time indicates the date and time the test was started. The date and time reset every time the test is restarted.

When necessary for power consumption monitoring the **Calibrating** progress message is displayed. If at any point during this process or during a sub-test execution an unexpected condition is detected, an abort message is displayed as follows:

Test Status	Description
Aborted, <reason>	Sub-test sequence has been aborted and a reason is displayed: Missing Optic, Invalid Optic, Laser Off, LOS, Optic Ovrld (overload), Device Pulled, Failed, or User Stopped .

Sub-Test Sequence

The progress status and pass/fail verdict are displayed for each sub-test sequence as follows:

Test Status	Description
"_"	Sub-test is not running or results are not available.
Running <details>	Sub-test is running and progress details are displayed.
Completed, Pass/Fail	Sub-test is completed with Pass or Fail verdict.
Aborted, Fail	Sub-test sequence has been aborted with a fail verdict.

➤ I/O Interface Quick Check:

- Validates the operation of the MDIO/I2C interface by sending specific commands to the transceiver.
- Validates the information provided by a status pin and stimulates a control pin of the transceiver.

- **Optical TX Power Test** (dBm) reports the minimum and maximum optical TX power values; in-range values are displayed in green while out-of-range are in red.
- **Optical RX Power Test** (dBm) reports the minimum and maximum optical RX power values; in-range values are displayed in green while out-of-range are in red.
- **Bit Error Test** reports the bit error count; count value smaller or equal to the BER threshold is displayed in green while bigger value is in red.
- **Excessive Skew Test** reports the highest skew value monitored during the sub-test. Excessive Skew is reported if the threshold is crossed otherwise there is no excessive skew. Only available for parallel interfaces at the exception of 100GBase-SR4.

Monitoring

- **Power Consumption** graphically displays a meter representing the transceiver power consumption in Watt. Only available on 890 and 890NGE (100G) modules.

The **Current (A)** and **Power (W)** values (**Actual** and **Maximum**) for 3.3V source are displayed.
- **Temperature** graphically displays a meter representing the transceiver temperature in °C.

The current (**Actual**) and maximum temperature values are also displayed.

Note: *The green region is delimited from 0 to the Threshold corresponding to a **PASS** verdict. The red region beyond the threshold corresponds to a **FAIL** verdict.*

Summary (iSAM)

From the **Test** menu, tap **Results**, and the **Summary** tab.

- **Start Time** indicates the date and time the test was started. The date and time is reset every time the test is restarted.
- **Configuration/Performance Results** and **RFC 6349 Results** buttons are used to respectively display summary results for **Service Configuration Test** and **Service Performance Test**, or **RFC 6349 Test** when results don't fit on one page.

Service Configuration Test and Service Performance Test

- The actual test status is displayed as follows:

Test Status	Description
"_"	Test has not started.
Disabled	Test/subtests is/are disabled.
Running	Test/subtest is currently running.
Data Transfer	Test/subtest is running but no test traffic is being transmitted.
Completed, <Verdict>	Test/subtest has completed with the test pass/fail verdict. A fail verdict is declared when a Link Down or LOS is detected, or when any SLA parameter fails.
Aborted, <reason>	Test/subtest has been aborted either manually (Stop) or automatically from an alarm and the reason why the test has been aborted is also displayed as follows: Link down alarm, LOS alarm, Timeout during execution, DTS connection failed, Loss of remote connection (DTS), Unresolved addresses, Stopped

For **Dual Test Set** the following values are reported for both local to remote (**L->R**) and remote to local (**R->L**).

- **Service** indicates the service's number and name.
The pass/fail verdict icon is displayed next to the service name indicating if the service complies to the configured SLA parameters.
- **TX CIR (Mbit/s)** indicates the transmitted Committed Information Rate.
- **FD (ms) (RTT¹) (Latency)** indicates the maximum measured round-trip latency (Frame Delay). The pass/fail verdict is also displayed.
- **IFDV (ms) (Jitter)** indicates the maximum measured Inter Frame Delay Variation. The pass/fail verdict is also displayed.
- **FLR (%) (Frame Loss)** indicates the maximum percentage of frames that are lost (Frame Loss Ratio) from the CIR step. The pass/fail verdict is also displayed.
- **RX Rate (Mbit/s)** indicates either the measured maximum utilization throughput for **Service Configuration Test** or the measured average utilization throughput for **Service Performance Test**. The pass/fail verdict is also displayed.
- **Total RX Rate**, available for **Service Performance Test**, indicates the average utilization throughput for all services (both directions are displayed for **Dual Test Set**).

1. RTT is only displayed for Dual Test Set.

Test Results

Summary (iSAM)

RFC 6349 Test

- **Test Status** indicates the actual test status as follows.

Test Status	Description
"--"	Test has not started.
In Progress	The test is running.
Completed, <Verdict>	Test has completed and the test pass/fail verdict is displayed when enabled. A fail verdict is declared if any of the following conditions occurs: Link Down, LOS, TCP Throughput verdict failed, or an abort condition (Timeout, DTS connection lost, unresolved address, user stopped, configuration synchronization error, invalid MTU).
Aborted, <reason>	Test has been aborted either manually (Stop) or automatically from an alarm and the reason is displayed as follows: Link down alarm, LOS alarm, Timeout during execution, DTS connection failed, Invalid Configuration, Unresolved addresses, Invalid MTU, User Stopped

- **MTU (bytes)** is the validated Maximum Transfer Unit.
- **Minimum RTT (ms)** is the minimum time between the first bit of a segment sent and the last bit of the corresponding acknowledge.
- **TCP Throughput**
 - **Service** indicates the service's number and name. The pass/fail verdict icon is displayed next to the service name. A fail verdict is declared if any of the following conditions occurs: Link Down, LOS, TCP Throughput verdict failed, or an abort condition (Timeout, DTS connection lost, unresolved address, user stopped, configuration synchronization error, invalid MTU).
 - **L->R** and **R->L** indicates respectively the direction from local to remote and remote to local.
 - **Window** indicates the total Max Window (1 KiB = 1024 bytes) followed by the number of connections and KiB per connection in parenthesis as follows: (n conn.@ n KiB).

- **Ideal L4** indicates the ideal TCP throughput metric.
- **Actual L4** indicates the average of actual TCP Throughput metric. The pass/fail verdict icon is displayed next to the this metric. A value greater or equal to the defined threshold gives a pass verdict.
- **TCP Efficiency (%)** indicates the TCP Efficiency metric based on transmitted and retransmitted bytes.
- **Buffer Delay (%)** indicates the Buffer Delay percentage metric which represents the increase in RTT during a TCP Throughput test versus the **Minimum RTT**.

Summary (ISDN PRI)

From the **Test** menu, tap **Results**, and the **Summary** tab.

- **Status** indicates the actual test status as follows.
 - “--”: The test is not running or results are not available.
 - **In Progress**: The test is running.
 - **Completed**: The test is completed, stopped at the planned time, or manually stopped when there is no set timer.

The Pass/Fail verdict is displayed next to the **Status** field when enabled (see ***Call Establishment/Termination Pass/Fail Verdict*** on page 172).

- **Start Time** indicates the date and time the test was started. The date and time is reset every time the test is restarted or reset.
- **Test Recovery** when displayed, indicates that the test has automatically recovered from a power failure. The number of occurrences is also displayed next to the **Test Recovery** field. Refer to *Power Failure Recovery* on page 599.
- **Logger Full**, when displayed, indicates that the logger is full. Refer to *Logger and Alarms/Errors Logger* on page 384.

Channel Buttons

The channel buttons allow the selection of a channel for which the information is displayed. The selected channel has its button highlighted with a blue border.

The top left corner of each button indicates the channel number on a background color as follows. The color coding remains when the test is stopped or when the call ends.

Channel Number Background Color	Description
Yellow	At least one alarm/error occurred during a data call.
Red	An alarm/error occurred in the last second of a data call.
Green	No alarm/error has occurred during a data call.

The channel buttons also used background colors as follows:

Button	Description
Red	An alarm/error occurred in the last second of a data call. The Status Bit Error or Pattern is displayed.
Green	No alarm/error has occurred in the last second of a data call. The status No Alarm is displayed.
Blue	Either a Speech or 3.1 kHz call is established, any call type is terminated, or the test is stopped.
(Greyed Out) Disabled	When a channel button is disabled, it implies that no call was established on the channel after the test started.

Test Results

Summary (ISDN PRI)

The Pass/Fail verdict icon is displayed on the top right corner of a channel button as follows.

Verdict	Call	Description
Pass	Data	BER result value meets the configured threshold criterion and the call establishment/termination succeeded.
	Speech or 3.1 kHz	The call establishment/termination succeeded.
Fail	Data	BER result value does not meet the configured threshold criterion and/or the call establishment/termination failed.
	Speech or 3.1 kHz	The call establishment/termination failed.

Channel

This section at the right of the channel buttons, displays information on the selected channel.


- **Call Reference** is a unique value assigned to an established call.
- The icon next to **Call Reference** indicates whether the call is incoming or outgoing followed by the duration of the call. An incoming call has an arrow pointing towards the receiver whereas, for an outgoing call the arrow points outwards.
- The Call Timer next to the incoming/outgoing call icon displays the duration of a call.
- **Calling Number** indicates the number of the calling party.
- **Called Number** indicates the number of the called party.
- **BERT**
 - **Alarms**, see *BER* on page 314 for more information.
 - **Errors**, see *BER* on page 314 for more information.
 - **Performance**

EFS (Error Free Second) gives the number of seconds within which no error occurred.

ES (Errored Second) gives the number of seconds in which one or more bits are in error.

SES (Severely Errored Second) gives the number of seconds in which bit error ratio is $\geq 1 \times 10^{-3}$.

UAS (Unavailable Second) gives the count of the seconds corresponding to the periods of unavailable time that begins at the onset of 10 consecutive SES events, including these 10 seconds. A period of available time shall begin at the onset of 10 consecutive non-SES events, including these 10 seconds.

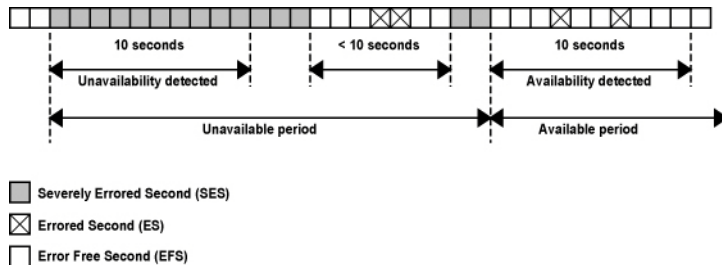

- **Bit Error Rate/Count** graphically displays a meter representing either the bit error rate or the bit error count depending on the Pass/Fail Verdict selection (refer to *ISDN PRI - ISDN Settings* on page 174).

When the verdict is enabled, the values under the threshold are presented in green while the values above are in red.

When the verdict is disabled, the bit error rate is displayed in blue.

Test Results

Summary (ISDN PRI)

Statistics

- **Active Call** column displays the quantity of active calls.

Active Call	Description
Data	Number of active Data calls
Speech	Number of active Speech calls
3.1 kHz	Number of active 3.1 kHz calls
Total	Total number of active calls

- **Total Calls Count** column displays statistics of **Connected**, **Cleared**, **Failed/Rej.**, and **Placed** calls.

Total Calls Count	Description
Connected	Number of calls that have been connected.
Cleared	Number of calls that have been cleared.
Failed/Rej.	Number of calls that failed or have been remotely rejected.
Placed	Number of outgoing calls.

- **Frequency** column displays the following information:

RX (MHz) indicates the monitored frequency of the input signal. The following table lists the supported frequency monitoring range:

Interface	Standard Rate Specification
DS1	1544000 ± 140 ppm
E1	2048000 ± 100 ppm

Offset (ppm) indicates the offset between the standard rate specification and the rate of the input signal.

Max (+) Offset (ppm) indicates the offset between the standard rate specification and the largest rate recorded from the received signal.

Max (-) Offset (ppm) indicates the offset between the standard rate specification and the smallest rate recorded from the received signal.

Note: *Values inside the standard range are presented on a green background while the value outside are presented on a red background.*

Test Results

Summary (Link OAM)

Summary (Link OAM)

From the **Test** menu, tap **Results**, and the **Summary** tab.

- **Test Status** displays the current status of the Link OAM test. The global test pass/fail verdict is displayed next to the **Test Status** when enabled (see **Pass/Fail Verdict** on page 292).

Test Status	Description
--	The test is not running or results are not available.
In Progress	The test is running.
Completed	The test is completed, stopped at the planned time, or manually stopped when there is no set timer.
Aborted	The test is interrupted; stopped before the set timer.

- **Start Time** Indicates the date and time the test was started. The date and time is reset every time the test is restarted or reset.
- **Test Recovery** when displayed, indicates that the test has automatically recovered from a power failure. The number of occurrences is also displayed next to the **Test Recovery** field. Refer to *Power Failure Recovery* on page 599.
- **Logger Full**, when displayed, indicates that the logger is full. Refer to *Logger and Alarms/Errors Logger* on page 384.

Alarms

- **Link OAM** indicates that no OAM Information PDUs were received for 5 seconds.
- **Critical Event**: Indicates that the OAM link partner has sent a critical event notification (bit 2 of the Flags field is set to 1).

- **Dying Gasp:** Indicates that the OAM link partner has sent an unrecoverable local failure notification (bit 1 of the Flags field is set to 1).
- **Link Fault:** Indicates that the OAM link partner has sent a link fault notification (bit 0 of the Flags field is set to 1).

Loopback

- **Local** indicates the **Status** of the local loopback (**Enabled** or **Disabled**) and allows to **Enable** or **Disable** it.
- **Remote**¹ indicates the **Status** of the remote loopback (**Enabled** or **Disabled**), the number of **Successful** remote loopback requests, the number of **Fail** remote loopback requests, and allows to **Enable** or **Disable** it.

OAMPDU Frame Count

- Indicates the number of transmitted and received OAMPDU frames of the following types:
 - **Information**
 - **Loopback Control**
 - **Event Notification** (received only)
- **Total** indicates the total number of transmitted and received OAMPDU frames.

1. Statistics are influenced by both the protocol (Parser Action is set to "01") and physical loopback. The Fail and Successful counters will be affected by successive enable/disable loopback requests when sending loopback request to a remote NetBlazer V2 Series module running Link OAM test since it does not provide physical loopback.

Test Results

Summary (NI/CSU Emulation)

Summary (NI/CSU Emulation)

From the **Test** menu, tap **Results**, and the **Summary** tab.

Status

Status indicates the progress of the cable test as follows:

- **Idle** (test has not started)
- **In Progress**
- **Completed**

The Pass/Fail verdict is displayed next to the **Test Status** field, when enabled, based on the following criteria: The worst pair's **Wire Map**, **Prop. Delay**, **Delay Skew**, and **Length**.

Start Time

Indicates the date and time the test was started. The date and time is reset every time the test is restarted or reset.

Auto-Response/Manual Loopback Status

Indicates the status of the loopback:

- **Loopback Active**
- **No Loopback.**

Interface

See *Interface* on page 331 for more information on Interface alarms/errors.

DS1

See *DS1* on page 317 for more information on DS1 alarms/errors.

Summary (RFC 2544)

From the **Test** menu, tap **Results**, and the **Summary** tab.

- **Start Time** indicates the date and time the test was started. The date and time is reset every time the test is restarted or reset. For **Dual Test Set**, this is the only information available on the remote module.
- **Test Recovery** when displayed, indicates that the test has automatically recovered from a power failure. The number of occurrences is also displayed next to the **Test Recovery** field. Refer to *Power Failure Recovery* on page 599.
- **Logger Full**, when displayed, indicates that the logger is full. Refer to *Logger and Alarms/Errors Logger* on page 384.
- **Remote unit in use and locked for Dual Test Set** indicates that this module is used for **Dual Test Set** as the remote module.
- **Remote unit in Dual Test Set Mode** indicates that this module is set as remote but the DTS Connection is not established.

Throughput, Back-to-Back, Frame Loss, and Latency Subtests

➤ **Throughput, Back-to-Back, Frame Loss, and Latency**

For each subtest, its status (-- (Idle), **In Progress**, **Completed**, or **Aborted** - (reason)) and duration are displayed.

- **TX Frames¹** and **RX Frames¹** display the transmitted and received frame counts of the subtest in progress. For **Dual Test Set**, frame counts are available for both directions: from local to remote (**L->R**) and remote to local (**R->L**). For Dual Port topology, frame counts are available for both P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**).

- **Trial #¹** displays the current trial iteration of the subtest in progress when applicable.

- **Val. #¹** displays the current validation iteration of the subtest in progress when applicable.

- **Step¹** displays the current step of the subtest in progress when applicable.

- **Displayed Results:** Select the displayed result mode: **Current**, **Minimum** (default), **Maximum**, or **Average**.

- **Throughput/Back-to-Back/Frame Loss/Latency** table.

Each frame size used for the test is displayed with its subtest statistics. Statistics values are displayed based on the **Displayed Results** setting.

“--” indicates that the result is not available because the test has not run yet. While testing, one of the following messages is displayed for each frame size: **Initializing**, **Learning**, **Testing**, **Waiting**, **Not measurable**, **Aborted**, **Link is Down**, or **MAC not resolved**.

Dir. (Direction), available with **Dual Test Set** or **Dual Port** topology, indicates respectively results from local to remote (**L->R**) and remote to local (**R->L**), or P1 to P2 (**P1->P2**) and P2 to P1 (**P2->P1**).

1. Only displayed once the test is started.

- **Unit:** Select the subtest result unit:

For Throughput: **Mbit/s**, **Gbit/s**, **frame/s**, and %.

For Back-to-Back: **Mbit/s**, **Gbit/s**, **frame/burst**, and %.

Frame Loss: %.

Latency: **ms**, and **μs**.

- **Layer:** For Throughput and Back-to-Back subtests, select the subtest layers used to calculate the throughput.

All (default): Layer 1,2,3 contains the Idle, Preamble, Start of Frame Delimiter, MAC address, IP address, and data.

Ethernet: Layer 2,3 contains the MAC layer, IP layer, and data.

IP: Layer 3 contains the IP layer, and data.

- **Step:** For Frame Loss subtest, selects the step (%) of the testing rate to be displayed.

- **Mode:** For Latency subtest, selects the propagation time mode.

Cut Through (default) allows the calculation of the propagation time of a bit (Bit Latency).

S. & F. (Store and Forward) allows the calculation of the propagation time of a frame (Frame Latency).

Test Results

Summary (RFC 6349)

Summary (RFC 6349)

From the **Test** menu, tap **Results**, and the **Summary** tab.

- **Status** indicates the actual test status as follows.

Test Status	Description
"--"	Test has not started.
In Progress	The test is running.
Completed, <Verdict>	Test has completed and the test pass/fail verdict is displayed when enabled. A fail verdict is declared if any of the following conditions occurs: Link Down, LOS, TCP Throughput verdict failed, or any abort condition.
Aborted, <reason>	Test has been aborted either manually (Stop) or automatically due to an abort condition, and the reason is displayed as follows: Link down alarm, LOS alarm, DTS connection failed, No Communication with Remote, Remote is busy, Unexpected response from Remote, Timeout during execution, Invalid Configuration, Unresolved addresses, Invalid MTU, User Stopped

- **Start Time** indicates the date and time the test was started. The date and time is reset every time the test is restarted or reset. This is the only information available on the remote module.
- **Test Recovery** when displayed, indicates that the test has automatically recovered from a power failure. The number of occurrences is also displayed next to the **Test Recovery** field. Refer to *Power Failure Recovery* on page 599.

- **Logger Full**¹, when displayed, indicates that the logger is full. Refer to *Logger and Alarms/Errors Logger* on page 384.
- **Remote unit in use and locked for Dual Test Set**² indicates that this module is used for **Dual Test Set** as the remote module.
- **Remote unit in Dual Test Set Mode**² indicates that this module is set as remote but the DTS Connection is not established.

MTU (bytes) is the validated Maximum Transfer Unit.

Minimum RTT (ms) is the minimum time between the first bit of a segment sent and the last bit of the corresponding acknowledge.

Window Sweep

- **L->R** and **R->L** indicates respectively the direction from local to remote and remote to local.
- **Actual L4** indicates for each step the average TCP throughput metric.

TCP Throughput

- **L->R** and **R->L** indicates respectively the direction from local to remote and remote to local.
- **Window (KiB)** indicates the total Max Window (1 KiB = 1024 bytes) followed by the number of connections and KiB per connection in parenthesis as follows: (n conn.@ n KiB).
- **Ideal L4** indicates the ideal TCP throughput metric.
- **Actual L4** indicates the average of actual TCP Throughput metric. The pass/fail verdict icon is displayed next to the this metric when enabled. A value greater or equal to the defined threshold gives a pass verdict.
- **TCP Efficiency (%)** indicates the TCP Efficiency metric based on transmitted and retransmitted bytes.

1. Displayed on local module only.

2. Displayed on Remote module only.

Test Results

Summary (RFC 6349)

- **Buffer Delay (%)** indicates the Buffer Delay percentage metric which represents the increase in RTT during a TCP Throughput test versus the **Minimum RTT**.
- **TCP Throughput Threshold (% of ideal)** allows to enter the TCP Throughput as a percentage of the defined CIR that will be used to declare the pass/fail verdict for both directions: **0** to **100 %**; default is **95 %**. The calculated throughput based on the selected threshold is displayed for both directions.

Summary (S-OAM and MPLS-TP OAM)

From the **Test** menu, tap **Results**, and the **Summary** tab.

- **Test Status** displays the current status of the S-OAM / MPLS-TP OAM test. The global test pass/fail verdict is displayed next to the **Test Status** when enabled (see **Pass/Fail Verdict** on page 292).

Test Status	Description
--	The test is not running or results are not available.
In Progress	The test is running.
Completed	The test is completed, stopped at the planned time, or manually stopped when there is no set timer.
Aborted	The test is interrupted; stopped before the set timer.

- **Start Time** Indicates the date and time the test was started. The date and time is reset every time the test is restarted or reset.
- **Test Recovery** when displayed, indicates that the test has automatically recovered from a power failure. The number of occurrences is also displayed next to the **Test Recovery** field. Refer to *Power Failure Recovery* on page 599.
- **Logger Full**, when displayed, indicates that the logger is full. Refer to *Logger and Alarms/Errors Logger* on page 384.

Test Results

Summary (S-OAM and MPLS-TP OAM)

Continuity Check (Peer MEP)

- **Status** displays the status of the continuity check with the peer MEP.

Status	Description
Loss Continuity	Loss of Continuity alarm is active.
Mismerge	Mismerge alarm is active.
Unexpected MEG Level	Unexpected MEG Level alarm is active.
Unexpected MEP	Unexpected MEP alarm is active.
Unexpected Period	Unexpected Period alarm is active.
Unexpected MD Level	Unexpected MD Level alarm is active.
Receiving CCMs	CCM frames from the peer MEP are received without alarms.

- **TX CCM** indicates the count of transmitted CCM frames.
- **RX CCM** indicates the count of valid CCM frames received. A valid frame for S-OAM has its source MAC address matching the Peer MEP MAC address; destination MAC address matching either the unit port Unicast MAC address or a Multicast class 1 address (refer to 678); and VLANs matching the unit port VLANs. A valid frame for MPLS-TP OAM has its destination MAC address matching either the unit MAC address, FF:FF:FF:FF:FF:FF, or 01:00:5E:90:00:00; VLANs matching the unit port VLANs; and MPL Labels matching the local MPLS Label Stack configuration.

- **CCM** indicates the content of the last received CCM frame including **MEG ID** (Y.1731 and G.8113.1), **Domain ID** (802.1ag and MEF), **MA Name** (802.1ag and MEF), **MEG Level** (Y.1731, MEF, and G.8113.1), **MD Level** (802.1ag), **MEP ID**, and **Period**.

For unsupported **Domain ID**, **MA Name**, and **MEG ID**, the **Unexpected Format** message is displayed.

	Supported Format
Domain ID	1 (No Maintenance Domain Name present) 4 (Character String)
MA Name	2 (Character String)
MEG ID	32 (ICC based format) 33 (CC and ICC based format)

Test Results

Summary (S-OAM and MPLS-TP OAM)

Loopback / Test / Frame Delay / Frame Loss / Synthetic Loss

Note: *Either Loopback, Test, Frame Delay, Frame Loss, or Synthetic Loss (available with Ethernet OAM) statistics are displayed according with the selected test function (refer to Test Function on page 242).*

➤ **Status** displays the status of the test function.

For **Loopback, Frame Delay, Frame Loss, and Synthetic Loss** (available with Ethernet OAM) functions:

Status	Description
Idle	No Results (function did not run yet).
In Progress	Test is in progress. Frames are being transmitted and monitored.
Completed	Test is completed: The test with continuous transmission is manually stopped and replies have been received or timed out. The test with continuous transmission is automatically stopped by a test timer and replies have been received or timed out. All frames of the test with non-continuous transmission have been transmitted and replies have been received or timed out.
Aborted	Test is aborted. The test with non-continuous transmission is stopped before all the frames are transmitted.

For **Test** function:

Status	Description
Idle	No Results (function did not run yet).
In Progress	Test is in progress. RX TST frames are being monitored.
Completed	Test is completed. The test is stopped or function is disabled after being In Progress state.

- **RX Line Utilization** meter and value, available with **Loopback** function, indicate the line rate utilization percentage (only LBR frames are considered) received in the last second.
- **TST RX Rate** meter and value, available with **Test** function, indicate the quantity of TST frames received in the last second.
- **Frame Delay** meter and value, available with **Frame Delay** function, indicate the average of the measured frame delays in the last second.
- **Frame Loss Ratio** meter, available with **Frame Loss** function, indicates for both Near-End and Far-End the last measured frame loss ratio in the last second.
- **Synthetic Loss Ratio** meter, available with **Synthetic Loss** function which is available with Ethernet OAM, indicates for both Near-End and Far-End the last measured Synthetic Loss ratio in the last second.

Note: *Refer to S-OAM and MPLS-TP OAM on page 404 for more alarms/errors/statistics information.*

Summary

Refer to *S-OAM and MPLS-TP OAM* on page 404 for more information on alarms.

Thresholds

Refer to *Thresholds* on page 238 for more information.

Summary (SyncE)

From the **Test** menu, tap **Results**, and the **Summary** tab.

- **Test Status** displays the current status of the SyncE test. The global test pass/fail verdict is displayed next to the **Test Status** when enabled (see **Pass/Fail Verdict** on page 292).

Test Status	Description
--	The test is not running or results are not available.
In Progress	The test is running.
Completed	The test is completed, stopped at the planned time, or manually stopped when there is no set timer.
Aborted	The test is interrupted; stopped before the set timer.

- **Start Time** indicates the time the test was started.
- **Test Recovery** when displayed, indicates that the test has automatically recovered from a power failure. The number of occurrences is also displayed next to the **Test Recovery** field. Refer to *Power Failure Recovery* on page 599.
- **Logger Full**, when displayed, indicates that the logger is full. Refer to *Logger and Alarms/Errors Logger* on page 384.

ESMC

Indicates the current (meter and value), average, minimum, and maximum ESMC frame rate (including information and event frames) received in frame/s. A fail verdict is also displayed beside the minimum and/or maximum values when the ESMC frame rate is outside the range while the Pass/Fail Verdict is enabled.

ESMC RX Rate meter displays the current ESMC frame rate (including information and event frames) in frame/s averaged over the last 11 frames received. The pass/fail verdict is also displayed when enabled.

Note: *When the **Pass/Fail Verdict** and **ESMC Rate Threshold** check boxes are selected (see page 292), the green region is delimited from 0.8 to 10.2 frames/s corresponding to a **PASS** verdict. The red regions above and beyond the threshold correspond to a **FAIL** verdict. There is neither green nor red region when the Pass/Fail verdict is disabled.*

Test Results

Summary (SyncE)

RX

- **Last QL Message** indicates the last Quality Level value received. The pass/fail verdict is also displayed when both **QL Mismatch Monitoring** and **Pass/Fail Verdict** check boxes are selected.

Last Change indicates the date and time of the Last QL Message has changed.

- **Information/Event Count** gives respectively the count of information and event frames generated for all Quality Level values.
- **QL Mismatch Frame Count** gives the total count of information and/or event frames received not matching the expected Quality Level. Only available when the **QL Mismatch Monitoring** check box is selected.
- **Frequency/Offset** indicates respectively the frequency and the offset between the standard rate specification and the rate of the input signal.
- **Max. (-/+) Offset (ppm)** indicates respectively the minimum and maximum offset between the standard rate specification and the largest/smallest rate recorded from the received signal.

TX

- **QL Message** indicates the Quality Level value that is generated.

Last Change indicates the date and time of the QL Message value has changed. For 1GE Electrical interface using **Local Clock** set to **Slave**, the **Last Change** is not available.

- **Information/Event Count** gives respectively the count of information and event frames generated for all Quality Level values. **Event Count** is not available with 1GE Electrical interface using remote local clock.

Summary (TCP Throughput)

From the **Test** menu, tap **Results**, and the **Summary** tab.

- **Test Status** indicates the actual test status as follows.

Test Status	Description
"--"	The test is not running or results are not available.
In Progress	The test is running.
Completed	The test is completed, stopped at the planned time, or manually stopped when there is no set timer.
Aborted - <Reason>	The test is interrupted; stopped before the set timer. Possible <Reason> are: TCP Session Closed or Remote IP Not Found.

- **Start Time** indicates the date and time the test was started. The date and time is reset every time the test is restarted or reset.
- **Test Recovery** when displayed, indicates that the test has automatically recovered from a power failure. The number of occurrences is also displayed next to the **Test Recovery** field. Refer to *Power Failure Recovery* on page 599.
- **Logger Full**, when displayed, indicates that the logger is full. Refer to *Logger and Alarms/Errors Logger* on page 384.

Test Results

Summary (TCP Throughput)

TCP Throughput

- **TCP Connection Status** indicates the actual TCP connection status.

Test Status	Description
"--"	The test is not running or results are not available.
In Progress	The TCP initialization algorithm is in progress.
Waiting	Indicates on the remote unit that the test is started but the TCP initialization algorithm is not initiated by the local unit.
Established	The TCP session has been successfully established between the local and remote units.
Closed	The session is closed. Either no TCP initialization algorithm has been received, the remote unit has received and completed the request to close the TCP session, or no data has been received at the remote unit for 30 seconds.
Closing	The TCP protocol is closing down the connection.
Remote IP not found	The local unit didn't received an answer to the ARP request sent to the IP address of the remote unit.

- **Transmitted Frames** indicates the total of frames transmitted by the local unit excluding the re-transmitted frames.
- **Re-transmitted Frames** indicates the total of frames that have been re-transmitted by the local unit.
- **Efficiency (%)** indicates the percentage of bytes that were not retransmitted.
- **Window Size Unit** allows to select the unit used for **Window Size**: **Bytes**, **KBytes**, or **MBytes** (default).
- **Throughput Threshold** allows to set the pass/fail verdict threshold value: **0** to **100 %** (default). This setting is available when the **Throughput Pass/Fail Verdict** check box is selected (refer to *TCP Throughput* on page 294).
- **Throughput** meter displays the last second TCP Throughput measurement.

- **TCP Throughput** displays respectively the last, minimum, maximum, and average TCP Throughput measurement.
- **Window Size** displays respectively the last, minimum, and maximum TCP window size.
- **Round Trip Latency (ms)** displays respectively the last, minimum, maximum, and average round trip time gathered from the TCP Throughput test.

Ethernet Traffic

Note: See Traffic - Ethernet on page 477 for more information.

Test Results

Summary (Traffic Gen & Mon)

Summary (Traffic Gen & Mon)

From the **Test** menu, tap **Results**, and the **Summary** tab.

- The **P1** and **P2** buttons, available with **Dual Port** topology, allow to respectively display the test summary for port #1 (**P1**) or port #2 (**P2**).
- **Test Status** indicates the actual test status as follows. The global test pass/fail verdict is displayed next to the **Test Status** when enabled (see *QoS Metrics* on page 289).
 - “--”: The test is not running or results are not available.
 - **In Progress**: The test is running.
 - **Completed**: The test is completed, stopped at the planned time, or manually stopped when there is no set timer.
- **Start Time** indicates the date and time the test was started. The date and time is reset every time the test is restarted or reset.
- **Test Recovery** when displayed, indicates that the test has automatically recovered from a power failure. The number of occurrences is also displayed next to the **Test Recovery** field. Refer to *Power Failure Recovery* on page 599.
- **Logger Full**, when displayed, indicates that the logger is full. Refer to *Logger and Alarms/Errors Logger* on page 384.

Stream

The following statistics are available for each stream.

- **Current Throughput**: See *Streams - Throughput* on page 416.
- **Frame Loss Rate**: See *Streams - Frame Loss / Out-of-Sequence* on page 414.
- **Jitter**: See *Streams - Jitter* on page 414.
- **Latency**: See *Streams - Latency* on page 415.

- **Out-of-Sequence:** See *Streams - Frame Loss / Out-of-Sequence* on page 414.
- **Stream** indicates the stream number and provides stream detailed statistics when tapping on its button.

The following statistics are displayed for the selected stream.

- **Stream Selection:** Select a stream by either using the left/right arrow or by tapping over the stream numbers area then tapping on a specific stream number. An orange background indicates the selected stream.
- **Throughput, Jitter, and Latency** meters display respectively the measured Throughput, Jitter, and Latency for the selected stream.

Note: *The green region is delimited from 0 to the Threshold corresponding to a **PASS** verdict. The red regions beyond the threshold corresponds to a **FAIL** verdict. The Pass/Fail verdict is only displayed when enabled (see QoS Metrics on page 289).*

- **Jitter:** See *Streams - Jitter* on page 414.
- **Latency:** See *Streams - Latency* on page 415.
- **RX Rate:** See *Streams - Throughput* on page 416.
- **RX Frame Count** indicates the number of frame received matching the selected stream.
- **TX Rate:** See *Streams - Throughput* on page 416.
- **TX Frame Count** indicates the number of transmitted frames matching the selected stream.
- **Frame Loss and Out-of-Sequence:** See *Streams - Frame Loss / Out-of-Sequence* on page 414.

Traces - OTN

From the **Test** menu, tap **Results**, **Traces**, and the **OTN** sub-tab.

OTUx, ODUx, and TCM Buttons

Tap on either OTUx, or an ODUx button. For ODUx when TCM is enabled (see Modify TCM on page 274), tap on a TCMx button to select a TCM level.

SM/PM TTI Traces

Received Message

- **SAPI** indicates the received TTI (Trail Trace Identifier) Source Access Point Identifier.
- **DAPI** indicates the received TTI Destination Access Point Identifier.
- **Operator Specific** indicates the received TTI Operator Identifier.

Expected Message

Note: *The TTI Traces are configurable for SM (OTUx), PM (ODUx), and TCM (ODUx when TCM is enabled; refer to Modify TCM on page 274). The following settings are coupled with the Expected Message from Traces (OTN) on page 299.*

- **SAPI** allows editing the expected Source Access point Identifier (TTI bytes 0 to 15). Available when the SAPI OTU/ODU-TIM check box is selected.
- **DAPI** allows editing the expected Destination Access point Identifier (TTI bytes 16 to 31). Available when the DAPI OTU/ODU-TIM check box is selected.
- **SAPI OTU/ODU-TIM** check box, when selected (cleared by default), allows editing the expected Source Access Point Identifier (SAPI) and also enables OTU/ODU-TIM alarm monitoring.

- **DAPI OTU/ODU-TIM** check box, when selected (cleared by default), allows editing the expected Destination Access Point Identifier (SAPI) and also enables the OTU/ODU/TCM-TIM alarm monitoring.
- **Copy RX** uses the received SAPI/DAPI message as the expected SAPI/DAPI.

Traces - SONET/SDH

From the **Test** menu, tap **Results**, **Traces**, and the **SONET/SDH** sub-tab.

Note: *Selecting a Trace byte to be generated will automatically update the corresponding OH byte. Refer to OH - SONET/SDH on page 529 for more information.*

Traces

➤ **Section/RS (J0), and STS/AU/TU-3 Path (J1), and VT/TU Path (J2)**

Displays the received J0/J1/J2 value in 16 or 64-bytes format. The <crc7> represents the CRC-7 for a 16-bytes format. The last two bytes of a 64-bytes format, <C_R> and <L_F>, represent respectively a carriage return and a line feed.

➤ **TIM-S/RS-TIM, TIM-P/HP-TIM, TIM-V/LP-TIM:** Enables the corresponding Trace Identifier Mismatch for the expected message defined. These settings are coupled with the Traces configuration from *Traces (SONET/SDH)* on page 302.

Copy RX allows to use the received TIM message as the expected one.

TCM Access Point Identifier

Note: *Available when TCM is enabled (refer to page 275).*

➤ **STS/AU Path (N1), and VT/TU Path (Z6 or N1 (TU-3))**

Displays the received N1/Z6 value.

➤ **TC-TIM-P/HPTC-TIM/TC-TIM-V/LPTC-TIM:** Enables the corresponding TCM Access Point Identifier for the expected message defined. These settings are coupled with the Traces configuration from *Traces (SONET/SDH)* on page 302.

Copy RX allows to use the received TIM message as the expected one.

Traffic - Ethernet

From the **Test** menu, tap **Results**, **Traffic**, and when applicable the **Ethernet** tab.

Note: *For Through Mode test application, the traffic statistics are displayed for both port directions (P1->P2 and P2->P1).*

P1 and P2 Buttons

The **P1** and **P2** buttons, available with **Dual Port** topology, allow to respectively display results for port #1 (**P1**) or port #2 (**P2**).

Traffic

- **Line Utilization (%)** indicates the current percentage of the transmitting/receiving line rate utilization.
- **Ethernet BW (Mbit/s)** indicates the current transmitting/receiving data rate expressed in Mbit/s.
- **Frame Rate (frame/s)** indicates the current transmitted/received number of frames (including bad frames, Broadcast frames and Multicast frames) in frame per second.
- **Frame Count** indicates the total number of transmitted/received valid and invalid frames.

Frame Type

Displays the TX and RX count of the following frame types.

- **Multicast** indicates the number of multicast frames transmitted/received without FCS errors. Broadcast frames are not counted as multicast frames.
- **Broadcast** indicates the number of broadcast frames transmitted/received without FCS errors.

Test Results

Traffic - Ethernet

- **Unicast** indicates the number of unicast frames transmitted/received without FCS errors.
- **Non-Unicast** indicates the number of multicast and broadcast frames transmitted/received without FCS errors.
- **Total** indicates the total number of all frames transmitted/received without FCS error.

Frame Size

Displays the RX count of each received frame size (valid and invalid), and the percentage (%) ratio of each received frame size based on the total count of frames. The percentage (%) ratio is not available for Through Mode test application.

- **< 64/80/82:** frames with less than 64 bytes; 80 bytes for EoE; 82 bytes for PBB-TE.
- **64/80/82:** frames equal to 64 bytes; 80 bytes for EoE; 82 bytes for PBB-TE.
- **65/81/83 - 127:** frames from 65 to 127 bytes; 81 to 127 bytes for EoE; 83 to 127 bytes for PBB-TE.
- **128 - 255:** frames from 128 to 255 bytes.
- **256 - 511:** frames from 256 to 511 bytes.
- **512 - 1023:** frames from 512 to 1023 bytes.
- **1024 - 1518/1534/1536:**
 - **1024 - 1518:** frames from 1024 to 1518 (no VLAN), 1522 (1 VLAN tag), 1526 (2 VLAN tags), or 1530 (3 VLAN tags) bytes.
 - **1024 - 1534:** for EoE, frames from 1024 to 1534; add 4 bytes to 1534 for each VLAN layer enabled in the encapsulated Ethernet payload and 4 bytes for EoE VLAN when enabled.

- **1024 - 1536:** for PBB-TE, frames from 1024 to 1536; add 4 bytes to 1536 for each VLAN layer enabled in the encapsulated Ethernet payload and 4 bytes for B-VLAN when enabled.
- **> 1518/1534/1536:**
 - **> 1518:** frames with more than 1518 (no VLAN), 1522 (1 VLAN tag), 1526 (2 VLAN tags), or 1530 (3 VLAN tags) bytes.
 - **> 1534:** for EoE: frame with more than 1534; add 4 bytes to 1534 for each VLAN layer enabled in the encapsulated Ethernet payload and 4 bytes for EoE VLAN when enabled.
 - **> 1536:** for PBB-TE, frame with more than 1536; add 4 bytes to 1536 for each VLAN layer enabled in the encapsulated Ethernet payload and 4 bytes for B-VLAN when enabled.
- **Total** indicates the total count of all received frames (valid and invalid).

Traffic - Flow Control

From the **Test** menu, tap **Results**, **Traffic**, and the **Flow Control** tab.

P1 and P2 Buttons

The **P1** and **P2** buttons, available with **Dual Port** topology, allow to respectively display results for port #1 (**P1**) or port #2 (**P2**).

Frame Count - RX

- **Pause Frames** indicates the number of received valid flow-control frames. Frames that have a type/length field equal to 0x8808 will be counted as a pause frame.
- **Abort Frame** indicates the number of received pause frames with a Quanta equal to zero; cancelling the pause frames.
- **Total Frame** indicates the total number of pause time received from the link partner.

Pause Time

Indicates respectively the total, last, maximum, and minimum pause time received from the link partner in **Quanta** (default) or **Microsecond** (μs).

Pause Injection

Note: *Pause injection is only available for Traffic Gen & Mon test application.*

- **Packet Pause Time:** Enter the pause time value to be transmitted in **Quanta** or **Microsecond** (default is **100 Quanta**).

Interface	Range	
	Quanta	μ s
10 Mbit/s	0 to 65535	0 to 3355392
100 Mbit/s	0 to 65535	0 to 335539.2
1000 Mbit/s	0 to 65535	0 to 33553.92
10 Gbit/s	0 to 65535	0 to 3355.392
40 Gbit/s	0 to 65535	0 to 838.848
100 Gbit/s	0 to 65535	0 to 335.5392

Note: *When entering a value in μ s it will be rounded to the closest multiple of 0.0512 for 10 Gbit/s, 5.12 μ s for 100 Mbit/s, 0.512 μ s for 1000 Mbit/s, and 0.0512 μ s for 10 Mbit/s, 0.0128 for 40 Gbit/s, and 0.00512 for 100 Gbit/s.*

- **Inject** button allows to generate the defined packet pause time.
- **Destination MAC Address** check box, when selected (cleared by default), enables and allows to set the destination MAC address. The default destination MAC address is the control protocol multicast address: **01:80:C2:00:00:01**.

Traffic - Graph

From the **Test** menu, tap **Results**, **Traffic**, and the **Graph** tab.

P1 and P2 Buttons

The **P1** and **P2** buttons, available with **Dual Port** topology, allow to respectively display results for port #1 (**P1**) or port #2 (**P2**).

The graph displays the received line utilization. The X axis shows the time in seconds while the Y axis shows the percentage utilization.

Traffic - OAM, S-OAM, and MPLS-TP OAM

From the **Test** menu, tap **Results**, **Traffic**, and the **OAM, S-OAM**, or **MPLS-TP OAM** tab.

Traffic Monitoring

Note: Only available with *Carrier Ethernet OAM* test application.

- In TX, reports counts of CCM, LBM, LTM, DMM, LMM, SLM, TST, AIS, LCK, and CSF frames transmitted. LTM and SLM are only available with Ethernet OAM. Total count is reported as well as unicast and/or multicast frame counts when applicable.
- In RX, reports counts of CCM, LBR, LTR, DMR, LMR, SLR, TST AIS, LCK, and CSF frames (LTR and SLR are only available with Ethernet OAM) received regardless of the sender as long as the following criteria are met:
 - **S-OAM:** The destination MAC address matches either the local MEP Unicast MAC address or a Multicast class 1 or class 2 address; and the VLANs matches the unit port VLANs. Refer to *Unicast/Multicast Addresses for Ethernet OAM* on page 678 for more information.
 - **MPLS-TP OAM:** The destination MAC address matches either the unit MAC address, FF:FF:FF:FF:FF:FF, or 01:00:5E:90:00:00; the VLANs matches the unit port VLANs; and MPL Labels matches the local MPLS Label Stack configuration. For AIS, LCK, and CSF, valid messages must also have the MEG Level matching the Local MEG Level.

Total count is reported as well as unicast and/or multicast frame counts when applicable.

Test Results

Traffic - OAM, S-OAM, and MPLS-TP OAM

Responder

Note: Available when the **S-OAM Responder** or **MPLS-TP OAM Responder** check box is selected (refer to S-OAM and MPLS-TP OAM Responder on page 237).

For **Carrier Ethernet OAM** test application:

- In TX, reports counts of LBR, LTR, DMR, LMR, and SLR total frames transmitted. LTR and SLR are only available with Ethernet OAM.
- In RX, reports counts of valid LBM, LTM, DMM, LMM, and SLM unicast, multicast, and total frames received. LTM and SLM are only available with Ethernet OAM. A valid messages must have its:

S-OAM: source MAC address matching the Peer MEP MAC address; destination MAC address matching either the unit port Unicast MAC address or a Multicast class 1 or class 2 address; VLANs matching the unit port VLANs, and MEG/MD Level matching the local MEG/MD Level. Refer to *Unicast/Multicast Addresses for Ethernet OAM* on page 678 for more information.

MPLS-TP OAM: destination MAC address matching either the unit MAC address, FF:FF:FF:FF:FF:FF, or 01:00:5E:90:00:00; VLANs matching the unit port VLANs; and MPL Labels matching the local MPLS Label Stack configuration.

For **Smart Loopback** test application:

- In TX, reports counts of LBR, LTR, DMR, LMR, and SLR total frames transmitted.
- In RX, reports counts of valid LBM, LTM, DMM, LMM, and SLM total frames received. A valid messages must have its destination MAC address matching either the unit port Unicast MAC address or a Multicast class 1 or class 2 address. Refer to *Unicast/Multicast Addresses for Ethernet OAM* on page 678 for more information.

Window Sweep

Displays the graph showing the Ideal L4 and Actual L TCP Throughput measured for each Window Sweep step. The number of connections and KiB per connection is also displayed in parenthesis as follows:
(n conn.@ n KiB)

From the **Test** menu, tap **Results**, and the **Window Sweep** tab.

WIS

From the **Test** menu, tap **Results**, and the **WIS** tab.

Traces/Label

- **J0 Trace** displays the **J0 Trace** value in 16-bytes format.
- **J1 Trace** displays the **J1 Trace** value in 16-bytes format.
- **Path Signal Label (C2)** displays the content of the STS SPE including the status of the mapped payload.

10 Test Functions

The Test Functions menu offers the following structure:

Transport Test Applications

Tab	Available with						Page
	a	b	c	d	e	f	
40/100G Advanced - CFP4/QSFP Control	X	-	-	-	-	-	490
40/100G Advanced - Lanes Mapping & Skew	X	-	-	-	-	-	494
APS	-	X	-	X	-	-	499
FDL - Bit-Oriented Message	-	-	X	X	X	-	502
FDL - Performance Report Message	-	-	X	X	X	-	506
FEAC	-	-	X	X	-	-	523
OH (OTN)	X	-	-	-	-	-	523
OH (SONET/SDH)	-	X	-	X	-	-	529
Pointer Adjustment	-	X	-	X	-	-	548
RTD	X	X	X	X	-	-	558
Signaling Bits	-	-	X	-	-	-	565
Spare Bits	-	-	X	X	-	X	566

- a. OTN BERT
- b. SONET/SDH BERT
- c. DS_n/PDH BERT
- d. SONET/SDH - DS_n/PDH BERT
- e. NI/CSU Emulation
- f. ISDN PRI

Test Functions

Ethernet Test Applications

Tab - Sub Tab	Test Application										Page
	a	b	c	d	e	f	g	h	i	j	
40/100G Advanced - CFP4/QSFP Control	X	X	X	X	X	X	-	-	-	-	490
40/100G Advanced - Lanes Mapping & Skew	X	X	X	X	X	X	-	-	-	-	494
Filters	-	-	-	X	X	-	X	-	X	-	513
Packet Capture	-	-	-	X	X	-	X	-	X	-	517
Ping & Trace Route	X	X	X	X	X	X		X	X	X	543
S-OAM Link Trace	-	-	-	-	-	-	-	-	X	-	563
Traffic Scan	-	-	-	-	X	-	-	-	-	-	568

- a. EtherSAM
- b. RFC 6349
- c. RFC 2544
- d. EtherBERT
- e. Traffic Gen & Mon
- f. Smart Loopback
- g. Through Mode
- h. TCP Throughput
- i. Carrier Ethernet OAM
- j. Cable Test

Packet Sync Test Applications

Tab	Test Application		Page
	1588 PTP	SyncE	
Filters	X	X	513
Packet Capture	X	X	517
Ping & Trace Route	X	X	543

Wireless Test Application

Tab	Test Application CPRI/OBSAI BERT	Framing	Page
RTD	X	Unframed	558
	X	Framed L2	561

Test Functions

40/100G Advanced - CFP4/QSFP Control

40/100G Advanced - CFP4/QSFP Control

From the **Test** menu, tap **Functions**, **40/100G Advanced**, and the **CFP4/QSFP Control** tab.

CFP4 Reference Clock (MHz)

Available with CFP4 only, allows to select the reference clock that will be used by the CFP4 transceiver.

Interface/Rate	1/160 Host Lane Rate (default - recommended)	1/40 Host Lane Rate
OTU4	174.7031 MHz	698.8123 MHz
100GE	161.1328 MHz	644.5313 MHz

CFP4/QSFP Power Class

Indicates the power class of the inserted CFP4/QSFP module.

CFP4/QSFP Control Pins

Allows the following CFP4/QSFP control pin settings. Refer to the CFP MSA standard for more information.

Note: *To apply any control, first select its check box then clear it; the control is applied only when the selected check box is cleared.*

- **TX Disable²** check box (cleared by default).
- **Module Low Power Mode** check box (cleared by default).
- **Module Reset** check box (cleared by default).
- **Module Power Shutdown** check box (cleared by default).

CFP4/QSFP Status Pins

Gives the following QSFP's pin status (refer to the QSFP MSA standard for more information):

Transceiver	Pin status
CFP4	Module Absent, RX Loss of Signal, Global Alarm
QSFP	Module Absent

➤ MDIO - Bulk Read

- **MDIO Start Address** allows the selection of the MDIO start address **0x0000** (default) to **0xFFFF**.
- **MDIO End Address** allows the selection of the MDIO end address **0x0000** to **0xFFFF**; default is **0x00FF**.
- **Bulk Read** button reads and displays the data based on the specified MDIO range (MDIO Start Address to MDIO End Address).

Save to CSV button allows to save the read MDIO's addresses and data to a CSV file.

Note: *The bulk read size is limited to 1024 addresses.*

➤ **MDIO - Read/Write**

- **MDIO Address** allows the selection of the MDIO address, **0x0000** (default) to **0xFFFF**.
- **MDIO Data** allows to either select (write) or read the MDIO data, **0x0000** (default) to **0xFFFF**.

MDIO Read button reads the data of the specified **MDIO Address**.

MDIO Write button writes the specified **MDIO DATA** value to the specified **MDIO Address**.

CFP4 TX Status

For parallel interface, indicates the CFP transmission status for each optical lane. For serial interface, indicates the CFP transmission laser status.

40/100G Advanced - Lanes Mapping & Skew

Note: Only available with parallel interface. Not available when the **RS-FEC** check box is selected.

From the **Test** menu, tap **Functions**, **40/100G Advanced**, and the **Lanes Mapping & Skew** tab.

TX

- **PCS/Logical Lane**, for Ethernet test applications, indicates the PCS (Ethernet test applications) or Logical (Transport Test applications) lane markers. To change the PCS/Logical lane order, see *Default/Random/Manual Mapping* on page 496.
- **Skew (Bits)** indicates the TX relative delay in bit time for each PCS/Logical lane. To change the skew values, see *Reset/Manual Skew* on page 497.

RX

- **Skew (bits)** indicates the delay in bit time between the earliest PCS/Logical lane and the current lane for the one to zero transition of the alignment marker sync bits. The received skew accuracy is ± 100 bits.
- **PCS/Logical Lane** indicates received PCS/Logical Lane markers.

Note: If a PCS/Logical Lane marker is detected more than once, a red background is used to highlight all occurrences of this PCS/Logical Lane marker. **Duplicate** is also displayed on a red background.

PCS/Logical Lane

Allows to order the PCS/Logical Lane markers in either **Ascending** (1,2,3...) or **Coupled to RX**.

Alarms

For a description of each alarm, refer to *OTL* on page 341 for Transport and *Ethernet - PCS Lanes / PCS* on page 327 for Ethernet.

Errors

For a description of each error, refer to *OTL* on page 341 for Transport and *Ethernet - PCS Lanes / PCS* on page 327 for Ethernet.

The error values are displayed in seconds by default. Tapping on the unit allows to select either **Seconds**, **Count**, or **Rate**.

Total indicates the total of all lanes when **Count** or **Rate** unit is selected.

Default/Random/Manual Mapping

Allows to change the PCS/Logical lane mapping that will be used for the test. Not available with 100 GbE client in OTU4.

- **Default Mapping** sets the TX mapping to the default numerical order value which corresponds to the ascending PCS/Logical lane order.
- **Random Mapping** sets the TX mapping in a random order. Each time the button is tapped, random alignment markers are assigned to each PCS/Logical lane.
- **Manual Mapping** allows to manually set the TX mapping.
 - **PCS/Logical Lane** and **Assigned Status**: The PCS/Logical Lane buttons allow to assign the corresponding Lane Marker to the selected PCS/Logical to CAUI/XLAUI/Physical Lane mapping (the one pointed by the arrow). The **Assigned Status** column displays a check mark next to the assigned PCS/Logical Lanes. Range is from **0** to **19** for OTU4/100G and **0** to **3** for OTU3/OTU3e1/OTU3e2/40G.
 - **PCS/Logical Lane** and **CAUI/XLAUI/Physical Lane** columns indicate the target PCS/Logical to CAUI/XLAUI/Physical mapping.
 - **Clear All** clears the PCS/Logical to CAUI /XLAUI/Physical Lane assignments.
 - **OK** accepts the new PCS/Logical to CAUI/XLAUI/Physical lane mapping. All target PCS/Logical Lane fields must contain an assignation, including duplicates, to give access to the **OK** button.

Note: *A PCS/Logical Lane marker can be assigned more than once, if this is the case a red background is used to highlight all occurrences of this PCS/Logical Lane marker.*

Reset/Manual Skew

Allows the selection of a relative delay in bit time that will be introduced for each PCS/Logical lane. Not available with 100 GbE client in OTU4.

- **Reset Skew** sets all TX skew (bit time) values to 0.
- **Manual Skew** allows to manually set the skew value for each PCS/Logical lane.
 - **All Lanes**, when selected, applies the change(s) to all PCS/Logical Lane at once.
 - **Skew Inc/Dec Size (bits)** allows to set the increment/decrement value that will be used when changing the TX Skew (bits) values using the “+” and “-” buttons. Range is from **0** to **2047** for 100G/OTU4 and **0** to **4095** for 40G/OTU3/OTU3e1/OTU3e2.
 - **PCS/Logical Lane** indicates the PCS/Logical Lane numbers and **All** which represents the value for all PCS/Logical Lane when the **All Lanes** check box is selected.
 - **Skew (bits)** allows to set the skew value for each lane. Enter directly the skew value in the field or use the “+” and “-” buttons to respectively increment or decrement the skew value using the defined **Skew Inc/Dec Size** value. Tapping and holding the “+” or “-” button increments/decrements successively allowing to reach the desired value faster. using the defined **Skew Inc/Dec Size** value. Range is from **0** to **2047** for 100G/OTU4 and **0** to **4095** for 40G/OTU3/OTU3e1/OTU3e2.

Laser ON/OFF

Allows to activate the laser control per optical lane or for all lanes.

Optical lane numbers are from **0** to **3**.

- **All Lanes** check box, when selected, applies the change(s) to all optical lanes at once.
- **Optical Lane** indicates the optical lane numbers and **All** which represents the setting for all optical lanes when the **All Lanes** check box is selected.
- **Laser** check box, when selected, indicates that the corresponding optical laser lane is activated and emitting an optical laser signal.

Skew Alarm Threshold (bits)

Allows to set the threshold value that will be used to declare a skew alarm (see **Ex. Skew** on page 341).

Default button restores the default alarm threshold value.

APS

From the **Test** menu, tap **Functions**, and the **APS** tab.

TX/RX

- **Switching Mode**, available for both TX and RX, selects the switching mode: **Linear** (default) or **Ring**.

- **K1**

Request: Bits 1 through 4 of the K1 byte.

Bits 1 to 4	Request	
	Linear mode	Ring mode
0000	No Request ^a	No Request (default) ^a
0001	Do Not Revert	Reverse Request - Ring
0010	Reverse Request	Reverse Request - Span
0011	Unused	Exerciser - Ring
0100	Exerciser	Exerciser - Span
0101	Unused	Wait-to-Restore
0110	Wait-to-Restore	Manual Switch - Ring
0111	Unused	Manual Switch - Span
1000	Manual Switch	Signal Degrade - Ring
1001	Unused	Signal Degrade - Span
1010	Signal Degrade - Low Priority	Signal Degrade (Protection)
1011	Signal Degrade - High Priority	Signal Fail - Ring
1100	Signal Fail - Low Priority	Signal Fail - Span
1101	Signal Fail - High Priority	Force Switch - Ring
1110	Force Switch	Force Switch - Span
1111	Lockout of Protection	Lockout of Protection - Span/SF - P

a. Default value.

Test Functions

APS

**Channel (Linear switching mode) or
Destination Node ID (Ring switching mode):**
Bits 5 through 8 of the K1 byte.

Bits 5 to 8	Channel ID (Linear mode)	Destination Node ID (Ring mode)	Bits 5 to 8	Channel ID (Linear mode)	Destination Node ID (Ring mode)
0000	0 - Null ^a	0 ^a	1000	8	8
0001	1	1	1001	9	9
0010	2	2	1010	10	10
0011	3	3	1011	11	11
0100	4	4	1100	12	12
0101	5	5	1101	13	13
0110	6	6	1110	14	14
0111	7	7	1111	15 - Extra Traffic	15

a. Default value.

➤ K2

**Protected Channel (Linear switching mode) or
Source Node ID (Ring switching mode):**
Bits 1 through 4 of the K2 byte.

Bits 1 to 4	Protected Channel (Linear mode)	Source Node ID (Ring mode)	Bits 1 to 4	Protected Channel (Linear mode)	Source Node ID (Ring mode)
0000	0 - Null ^a	0 ^a	1000	8	8
0001	1	1	1001	9	9
0010	2	2	1010	10	10
0011	3	3	1011	11	11
0100	4	4	1100	12	12
0101	5	5	1101	13	13
0110	6	6	1110	14	14
0111	7	7	1111	15 - Extra Traffic	15

a. Default value.

Architecture (Linear switching mode) or

Bridge Request (Ring switching mode):

Bit 5 of the K2 byte. The default setting is **1+1** for Linear switching mode and **Short Path Request** for Ring switching mode.

Bit 5	Architecture (Linear mode)	Bridge Request (Ring mode)
0	1+1 ^a	Short Path ^a
1	1:n	Long Path

- a. Default value.

Operation Mode: Bits 6 through 8 of the K2 byte.

Bits 6 to 8	Linear mode	Ring mode
000	Reserved ^a	Idle ^a
001	Reserved	Bridged
010	Reserved	Bridged and Switched
011	Reserved	Extra Traffic - Protection
100	Unidirectional	Reserved
101	Bidirectional	Reserved
110	RDI-L ^b /MS-RDI ^c	RDI-L ^b /MS-RDI ^c
111	AIS-L ^b /MS-AIS ^c	AIS-L ^b /MS-AIS ^c

- a. Default value.
b. Operation mode for SONET.
c. Operation mode for SDH.

FDL - Bit-Oriented Message

Allows to set and configure the Bit-Oriented Messages (BOM) of the Extended Super-Frame (ESF).

Note: *FDL is only available for DS1 interface with ESF framing. For Dual RX test, FDL is only available for the DS1 TX/RX port 1.*

From the **Test** menu, tap **Functions**, **FDL**, and the **Bit-Oriented Message** tab.

Generated Messages

► Priority

Codeword: The Bit-Oriented Message codewords are priority messages sent over the Data-Link. These messages are mostly used for networking operation and maintenance. A Bit-Oriented Message consists of 8 consecutive ones followed by a byte starting and ending by zeros.

Codeword	Pattern
RAI	00000000 11111111
Loopback Retention and Acknowledge	00101010 11111111
RAI-CI	00111110 11111111

Injects generates the selected codeword priority message.

► Command/Response

Amount allows the selection of the number of message to be generated. Choices are **1** to **15**. The default value is **10**.

Inject manually generates the selected amount of messages.

Codeword

Command/Response Codeword	Pattern	Command/Response Codeword	Pattern
Line Loopback Activate	00001110 11111111	Protection Switch Line 22	01101100 11111111
Line Loopback Deactivate	00111000 11111111	Protection Switch Line 23	01101110 11111111
Payload Loopback Activate	00010100 11111111	Protection Switch Line 24	01110000 11111111
Payload Loopback Deactivate	00110010 11111111	Protection Switch Line 25	01110010 11111111
Reserved for Network Use	00010010 11111111 ^a	Protection Switch Line 26	01110100 11111111
Universal Loopback (Deactivate)	00100100 11111111	Protection Switch Line 27	01110110 11111111
ISDN Line Loopback (NT2)	00101110 11111111	Protection Switch Acknowledge	00011000 11111111
CI/CSU Line Loopback (NT1)	00100000 11111111	Protection Switch Release	00100110 11111111
For network use	00011100 11111111 ^b	Do Not use for Synchronization	00110000 11111111
Protection Switch Line 1 b	01000010 11111111	Stratum 2 Traceable	00001100 11111111
Protection Switch Line 2	01000100 11111111	SONET Minimum Clock Traceable	00100010 11111111
Protection Switch Line 3	01000110 11111111	Stratum 4 Traceable	00101000 11111111
Protection Switch Line 4	01001000 11111111	Stratum 1 Traceable	00000100 11111111
Protection Switch Line 5	01001010 11111111	Synchronization Traceability Unknown	00001000 11111111
Protection Switch Line 6	01001100 11111111	Stratum 3 Traceable	00010000 11111111
Protection Switch Line 7	01001110 11111111	Reserved for Network Synchronization	01000000 11111111
Protection Switch Line 8	01010000 11111111	Transmit Node Clock (TNC)	01111000 11111111
Protection Switch Line 9	01010010 11111111	Stratum 3E Traceable	01111100 11111111
Protection Switch Line 10	01010100 11111111	Under study for maintenance	00101100 11111111
Protection Switch Line 11	01010110 11111111	Under study for maintenance	00110100 11111111
Protection Switch Line 12	01011000 11111111	Reserved for network use	00010110 11111111
Protection Switch Line 13	01011010 11111111	Reserved for network use	00011010 11111111
Protection Switch Line 14	01011100 11111111	Reserved for network use	00011110 11111111
Protection Switch Line 15	01011110 11111111	Reserved for network use	00111010 11111111
Protection Switch Line 16	01100000 11111111	Reserved for customer	00000110 11111111
Protection Switch Line 17	01100010 11111111	Reserved for customer	00001010 11111111
Protection Switch Line 18	01100100 11111111	Reserved for customer	00000010 11111111
Protection Switch Line 19	01100110 11111111	Reserved for customer	00110110 11111111
Protection Switch Line 20	01101000 11111111	Reserved for customer	00111100 11111111
Protection Switch Line 21	01101010 11111111	Reserved for customer	01111010 11111111

- a. Loopback Activate.
b. Indication of NT1 power off.

Receive Messages

- **Link Activity** indicates the activity of the following parameters during the last second of measurement.
 - **Idle** indicates that only idle codes have been detected in the last second.
 - **Priority** indicates that at least one valid priority message has been detected in the last second.
 - **C/R** (Command/Response) indicates that at least one valid command and response has been detected in the last second.
 - **Unassigned** indicates that at least one unassigned message has been detected in the last second. Therefore, since an unassigned message is part of a Command/Response codewords, the Command/Response LED will also be red.
 - **PRM** indicates that at least one PRM has been detected in the last second.
- **Priority:** The Bit-Oriented Messages are priority messages send over the Data-Link. These messages are mostly used for networking operation and maintenance. A Bit-Oriented Message consists of 8 consecutive 1s followed by a byte starting and ending by zeros.

Current indicates the priority message detected in the last second. If no priority message has been detected, "--" is displayed.

Previous indicates the last priority message detected excluding the current message. If no priority message has been detected since the beginning of the test, "--" is displayed.

Note: See Priority on page 502 for the list of possible priority codeword messages.

➤ **Command/Response**

Current indicates the command/response message detected in the last second. If no priority message has been detected, "--" is displayed.

Previous indicates the last command/response message detected excluding the current message. If no command/response message has been detected since the beginning of the test, "--" is displayed.

Note: *See Command/Response on page 502 for the list of possible Command/Response codeword messages.*

FDL - Performance Report Message

Note: FDL PRM is only available for DS1 interface with ESF framing. For Dual RX test, FDL is only available for the DS1 TX/RX port 1. For NI/CSU Emulation, only available in the RX direction.

From the **Test** menu, tap **Results**, tap the **FDL**, and **Performance Report Message** tab.

Generated Messages

- **Circuit** allows the selection of the circuit type: **CI to Network** (default) or **Network to CI**.
- **ANSI T1-403** check box when selected allows the generation of a compliant ANSI T1.403 PRM Message.
- **Injection**
 - Single** sends the selected PRM Message(s) manually.
 - Continuous** generates the selected PRM Message(s) continuously.
- **Event Count** indicates the number of PRM messages sent.
- **PRM Bit Events** allows the activation of the following PRM bit events. All PRM bit events are disabled by default.

G1: CRC = 1	FE: Frame sync. bit error ≥ 1
G2: $1 < \text{CRC} \leq 5$	LV: Line code violation event ≥ 1
G3: $5 < \text{CRC} \leq 10$	LB: Payload loopback activated
G4: $10 < \text{CRC} \leq 100$	SL: Slip ≥ 1
G5: $100 < \text{CRC} \leq 319$	R Bit (Reserved - Default value is 0)
G6: $\text{CRC} \geq 320$	U1: Bit
SE: Severely errored framing ≥ 1	U2: Bit

Received Messages

- **Event Counts** lists received PRM bit event counts. See **PRM Bit Events** below.
- **Report Content** lists received performance information. See **Performance Information** below.
- **Circuit** indicates the selected circuit type: **CI to Network** or **Network to CI**.
- **Valid Event Count** indicates the number of valid PRM messages received.
- **Link Activity**, see page 504 for more information.
- **PRM Bit Events** table, available when the **Event Counts** button is selected, reports the count of the detected valid PRM bit events.

G1: CRC = 1	SE: Severely errored framing ≥ 1
G2: $1 < \text{CRC} \leq 5$	FE: Frame sync. bit error ≥ 1
G3: $5 < \text{CRC} \leq 10$	LV: Line Code Violation ≥ 1
G4: $10 < \text{CRC} \leq 100$	LB: Payload loopback activated
G5: $100 < \text{CRC} \leq 319$	SL: Slip ≥ 1
G6: CRC ≥ 320	

Test Functions

FDL - Performance Report Message

- **Performance Information** table, available when the **Report Content** button is selected, reports the time t0, t0-1, t0-2, and t0-3 for each PRM.

Time

- **T0** represents the valid PRM message received in the last second of measurement (bytes 5 and 6).
- **T0-1** represents the message one PRM ago (bytes 7 and 8).
- **T0-2** represents the message two PRM ago (bytes 9 and 10).
- **T0-3** represents the message three PRM ago (bytes 11 and 12).

PRM

G3: $5 < \text{CRC Error Event} \leq 10$

LV: Line Code Violation Event ≥ 1

G4: $10 < \text{CRC Error Event} \leq 100$

U1: Under study for synchronization

U2: Under study for synchronization

G5: $100 < \text{CRC Error Event} \leq 319$

SL: Controlled Slip Event ≥ 1

G6: CRC Error Event ≥ 320

FE: Frame Sync. Bit Error Event ≥ 1

SE: Severely-Errored Framing Event ≥ 1

LB: Payload Loopback Activated

G1: CRC Error Event = 1

R: Reserved

G2: $1 < \text{CRC Error Event} \leq 5$

Nm and **Nl:** One-second report modulo 4 counter.

FEAC

The Far-End Alarm and Control signal (FEAC) provides Communication Channel capability over a DS3 in a network applications using C-bit Parity configuration (see page 264).

From the test menu, tap **Functions**, and the **FEAC** tab.

Generated Messages

Allows to configure and send alarms/status information and control signals (loopback commands) to other network elements.

► Alarm/Status and Unassigned

- **Codeword** allows the selection of the codeword alarm/status to be generated either manually or continuously.

The FEAC message format is a 16 bit codeword (0xxxxxx0 1111111) with the rightmost bit transmitted first. The 0xxxxxx0 represents the message codeword.

Codeword		
DS3 Equipment Failure SA (00110010)	Single DS1 LOS (00111100)	User Defined (00100000)
DS3 Loss of Signal (LOS) (00011100)	DS1 Equipment Failure NSA (00000110)	User Defined (00100010)
DS3 Out-of-Frame (00000000)	User Defined (00000010)	User Defined (00101000)
DS3 AIS Received (00101100)	User Defined (00000100)	User Defined (00101110)
DS3 Idle Signal Received (00110100)	User Defined (00001000)	User Defined (00110000)
DS3 Equipment Failure NSA (00011110)	User Defined (00001100)	User Defined (00111110)
DS3 NUI Loop Up (00010010)	User Defined (00010000)	User Defined (01000000)
DS3 NUI Loop Down (00100100)	User Defined (00010100)	User Defined (01111010)
Common Equipment Failure NSA (00111010)	User Defined (00010110)	User Defined (01111100)
Multiple DS1 LOS (00101010)	User Defined (00011000)	User Defined (01111110)
DS1 Equipment Failure SA (00001010)	User Defined (00011010)	

- **Mode** is the alarm/status injection mode: **Manual** or **Continuous**.

Test Functions

FEAC

- **Amount** is the amount of codeword to be generated: **1 to 15** (default is **10**).
- **Inject** generates error(s) according to the Codeword and mode selected.
- **Loopback Commands**
 - **Control**

Codeword is the loopback control codeword to be generated: **Line Loopback Activate (00001110)** - (Default) or **Line Loopback Deactivate (00111000)**.

Amount is the number of **Control Codeword** to be generated: **1 to 15** (default is **10**).
 - **Channel**

Codeword is the channel codeword to be generated.

Channel Codeword		
DS3 Line (00110110)	DS1 Line-No10 (01010100)	DS1 Line-No20 (01101000)
DS1 Line-No1 (01000010)	DS1 Line-No11 (01010110)	DS1 Line-No21 (01101010)
DS1 Line-No2 (01000100)	DS1 Line-No12 (01011000)	DS1 Line-No22 (01101100)
DS1 Line-No3 (01000110)	DS1 Line-No13 (01011010)	DS1 Line-No23 (01101110)
DS1 Line-No4 (01001000)	DS1 Line-No14 (01011100)	DS1 Line-No24 (01110000)
DS1 Line-No5 (01001010)	DS1 Line-No15 (01011110)	DS1 Line-No25 (01110010)
DS1 Line-No6 (01001100)	DS1 Line-No16 (01100000)	DS1 Line-No26 (01110100)
DS1 Line-No7 (01001110)	DS1 Line-No17 (01100010)	DS1 Line-No27 (01110110)
DS1 Line-No8 (01010000)	DS1 Line-No18 (01100100)	DS1 Line-No28 (01111000)
DS1 Line-No9 (01010010)	DS1 Line-No19 (01100110)	DS1 Line-All (00100110)

- Amount** is the number of Channel Codeword to be generated: **1 to 15** (Default is **10**).
- **Inject** generates the defined loopback command.

Received Messages

Displays current and previous alarms/status and loopback commands as well as the link activity for the received DS3 signal.

➤ Link Activity

- **None (All 1's):** An all ones pattern (11111111 11111111) has been detected in the last second.
- **Alarm/Status:** An Alarm/Status codeword has been detected in the last second. An Alarm/Status is only detected when receiving at least 10 consecutive occurrences of a specific codeword.
- **Loopback:** A Loopback command message has been detected in the last second. A valid loopback command is detected only when receiving 10 consecutive occurrences of a specific **Loopback Command** immediately followed by 10 occurrences of a specific **Channel Codeword**.
- **Unassigned:** An unassigned message has been detected in the last second. An Unassigned message is only detected when receiving at least 10 consecutive occurrences of a specific unassigned codeword. An **Alarm/Status** codeword is also reported since **Unassigned** is part of the **Alarm/Status** group.
- **Alarm/Status and Unassigned** displays the current and previously received **Codeword** messages.
 - **Current** indicates the last valid message, if any, received in the last second of measurement.
 - **Previous** indicates the message, if any, that was received just before the current measurement.

Test Functions

FEAC

➤ Loopback Commands

- **Current** displays the valid message received in the last second of measurement. A valid message is detected only when receiving 10 consecutive occurrences of a specific **Loopback Command** immediately followed by 10 occurrences of a specific **Channel Codeword**.
- **Previous** displays the last valid message received excluding the actual **Current** message.

Filters

Allows gathering statistics according to the programmed filters. Filters provide the capability to analyze a specific stream's behavior in order to monitor a single protocol's behavior, perform SLA verification, or precisely troubleshoot unwanted behavior. Up to 4 filters having up to four operands each can be defined and enabled.

From the **Test** menu, tap **Functions**, and the **Filters** tab.

P1 and P2 Buttons

The **P1** and **P2** buttons, available with **Dual Port** topology, allow to respectively display results for port #1 (**P1**) or port #2 (**P2**).

Filters

Allows the selection of the filter number (1 to 4). The filter criteria, if defined, will be displayed. A filter used (enabled) for data capture will not be configurable and the message **Filter in use for data capture** is displayed.

Enable

Once the filter is configured, select the **Enable** check box to enable the current filter. However, if the filter configuration contains errors, it will not be possible to enable it. A filter can be enabled or disabled even when the test is running. It is not possible to modify or disable a filter that is already in use for capture until either another filter or **Interface** (see *Capture Source* on page 517) is assigned to capture.

Enabled Time

Indicates the time during which the filter is enabled.

Assign to Capture

Note: *Only available when the ETH-CAPTURE software option is enabled. Refer to Software Option on page 30 for more information.*

Assigns the selected filter for packet capture. See *Packet Capture* on page 517.

Filter Configuration

Note: *Multiple filter criteria is only available when the ADV-FILTERS option is enabled; otherwise only one criterion is possible. Refer to Software Option on page 30 for more information.*

The filter configuration section allows to configure the filter criteria for the selected filter. The configuration is only possible when the **Enable** check box is cleared.

- “(“ and “)“, the open and close parenthesis controls the precedence of operands when more than two operands are used. Only one level of parenthesis is supported. When no parenthesis are used, a logical AND has precedence over a logical OR.
- **Not** check box when selected, adds the logical negation (not equal) operator for the operand filter defined at its right.

- **Filter** specifies the filter to be used (**None** by default).

Category	Filter
Ethernet	MAC Destination Address, MAC Source Address, EtherType ^a , C-VLAN ID, S-VLAN ID, E-VLAN ID, C-VLAN Priority, S-VLAN Priority, E-VLAN Priority
IPv4	IPv4 Destination Address, IPv4 Source Address, IPv4 TOS, IPv4 Precedence, IPv4 Protocol, IPv4 DiffServ
IPv6 ^b	IPv6 Destination Address, IPv6 Source Address, IPv6 Flow Label, IPv6 Next Header ^c , IPv6 Traffic Class, IPv6 Precedence, IPv6 DiffServ
Higher Layer	TCP Destination Port, TCP Source Port, UDP Destination Port, UDP Source Port
MPLS ^b	MPLS Label 1, MPLS Label 2, MPLS COS 1, MPLS COS 2

- Applies only to the last EtherType occurrence when VLAN is used.
- Available when the corresponding software option is enabled (refer to page 30).
- Applies only to the last next header occurrence when extension headers are used.

- **Value** is the value associated to the selected filter.

Test Functions

Filters

- **Mask** allows masking the defined filter value. A bit mask of 1 indicates that the corresponding bit in the value is compared for the match. A bit mask of 0 indicates that the corresponding bit in the value is ignored.

For binary values, enter the mask value in binary format.

For decimal values, enter the mask value in hexadecimal format.

For IP address field, enter the mask in decimal format.

For MAC address, enter the mask value in hexadecimal format.

- **Oper.** specifies the logical operator (AND or OR) used between two operands.

Filter Statistics

Indicates throughput statistics of frame matching the configured filter's criteria.

- **Line Utilization** gives the percentage of line rate utilization.
- **Ethernet BW** (Bandwidth) gives the receiving data rate expressed in Mbit/s.
- **Frame Rate** gives the receiving number of frames (including bad frames) in frame/s.
- **Frame Count** indicates the number of frame matching the configured filter's criteria.
- **Error Count** indicates respectively the number of frames matching the configured filter's criteria having **IP Checksum**, **UDP Checksum**, **TCP Checksum**, **FCS**, **Jabber**, **Oversize**, **Runt**, or **Undersize** errors. Refer to *Ethernet* on page 324 and *IP/UDP/TCP* on page 334 for more information on errors.

Packet Capture

Capture is used to analyze all or filtered data traffic and save complete or truncated frames into a buffer. It allows to precisely observe network truncated data, or to understand errors and unwanted behavior.

From the **Test** menu, tap **Functions**, and the **Packet Capture** tab.

P1 and P2 Buttons

The **P1** and **P2** buttons, available with **Dual Port** topology, allow to respectively display results for port #1 (**P1**) or port #2 (**P2**).

Capture Source

Specifies what kind of data to be captured.

- **Interface** captures all received frames and saves them in the capture buffer.
- **Filter x** captures only frames that match the selected filter and saves them in the capture buffer. Select the filter number from the list. Only enabled filters are available, see *Filters* on page 513.

The selected filter will be reserved for data capture and will not be available for filter configuration.

Frame Length

Specifies the length of the frame that will be saved in the capture buffer.

- **Complete** captures the entire frames.
- **Truncated** captures only the first specified number of bytes per frame. Use either the Bytes field to manually enter the number of bytes per frame or tap on the **Truncation Calculator** button for automatic bytes per frame calculation.

Bytes allows the selection of the number of bytes that will be saved in the capture buffer for each frame captured. Choices are from 14 (default) to 1536 bytes.

Truncation Calculator allows to easily determine at what byte to truncate the frame captured by selecting the desired frame header components.

- **Header Layer** specifies the header layer level: **Layer 2 (Ethernet)**, **Layer 3 (IP)**, or **Layer 4 (TCP/UDP)**.
- **IP Version** specifies the IP version: **IPv4** or **IPv6**.
- **Encapsulation** parameters are optional and not selected by default.

VLAN check box, when selected, enables VLAN and allows to select the number of VLANs: 1, 2, or 3.

MPLS check box, when selected, enables MPLS and allows to select the number of labels: 1 or 2.

- **Additional Payload (bytes)** allows to optionally select the number of additional payload bytes (1 to 1400 bytes).
- **Total Number of Bytes** indicates the number of bytes for the selected frame parameters. This value will be used as the truncated frame length (**Truncated** field).

Trigger

- **Trigger Type** defines the trigger source criterion that will be used to automatically start/stop the capture when a received frame matches the filter and the trigger criteria.
- **Manual** automatically starts the frame capture when the Capture button is on (green LED) and the test is started (refer to *Start/Stop | TX Button* on page 598).
- **On Error** starts the frame capture when the selected error occurs.

FCS

Jabber

Oversize (Available when **Oversize Monitoring** is enabled)

Runt

Undersize

IP Checksum

UDP Checksum

TCP Checksum

Any Type (Any of the above errors).

- **Field Match** starts the frame capture when the configured field match is encountered. Use the **Configuration** button to select the field match criteria (see **Filter Configuration** from the **Filters** tab).

Cfg. Status indicates the status of the configured field match configuration: **Valid** or **Invalid**. A valid status is required to be able to start the capture.

Test Functions

Packet Capture

- **Trigger Position** selects the triggered frame position within the buffer.
 - **Post-Trigger** for a trigger frame located at the beginning of the buffer. The buffer will contain the triggered frame with the following frames.
 - **Mid-Trigger** for a trigger frame located at the middle of the buffer. The buffer will contain the triggered frame with the preceding and following frames.
 - **Pre-Trigger** for a trigger frame located at the end of the buffer. The buffer will contain the triggered frame with the preceding frames.

Status and Controls

- **Capture Status** indicates the status of the data capture:
 - “--”: The capture is not started and has not run yet.
 - Armed...**: The capture is started but waiting for the trigger event.
 - Capturing...**: The capture is in progress. For Post-Trigger and Mid-Trigger mode, the trigger event has been captured and the buffer is filling up.
 - Completed**: The capture is completed.
- **Frame Count** indicates the number of frames captured that matches the selected filter criteria. However, for Mid-trigger and Pre-Trigger, the frame counter will only be available when the capture is completed.
- **Buffer Usage** indicates the percentage of the buffer capacity used.
- **Triggered Error** is available when trigger on error is selected and indicates the error that activated the trigger.

- **Triggered Frame - Details** gives details on the triggered frame.

The triggered frame corresponds to the first received frame that matches the filter and the trigger settings.

Frame Number indicates the triggered frame position in the buffer.

The framing MAC/IP/UDP/TCP source and destination addresses are displayed in a table.

- **Capture** button allows to start/stop the data capture. The test must be running (refer to *Start/Stop | TX Button* on page 598) in order to start capturing and recording data into the buffer. The Capture button is not available when the trigger on field match is selected while its trigger parameters are not valid.

No data will be recorded in the buffer if no frame matches the filter and the trigger criteria during the data capture.

The data capture stops automatically once the buffer is full. The maximum buffer capacity is 64 KBytes or a maximum of 2078 frames for rates up to 10GE and 512 KBytes or a maximum of 8192 frames for rates 40GE and 100GE.

When the capture stops or is manually stopped, the following message is displayed: **Capture completed. Press Export to save captured data (the test must be stopped)**. To avoid losing the captured data, the data must be exported and saved into a file before restarting the test or creating a new test.

- **Export** button, available when the test application is stopped, allows to export the data captured into a .pcap file format and to view the file using Wireshark.

- **Save In:** Allows to select the folder to save the capture file.

The capture file is saved in the following folder by default:
d:|ToolBox|User Files|<Product Name>|Capture Data
d:|IQSManager|User Files|<Product Name>|Capture Data

Test Functions

Packet Capture

- **View File After Generation:** Allows to display the report once it is generated using the Wireshark application. The **View File After Generation** check box is not selected by default.

- **Generate & Save**

Allows to generate and save the capture data. The name of the captured file is automatically selected and contains the date and time of the capture. Capture file bigger than 100Mbytes will be split into multiple files.

Tapping on the **Cancel** button stops the capture generation. The captured data already processed will be saved.

Note: *The export process may take several minutes.*

Once generated, the capture file will be automatically opened in Wireshark when the **View File After Generation** check box is selected.

The capture file report may also be manually opened within Wireshark typically using Windows Explorer.

OH - OTN

From the **Test** menu, tap **Functions**, and the **OH** tab.

TX and RX buttons

Allows to respectively modify (**TX** button) the overhead information to be transmitted or to view (**RX** button) the overhead information received.

Default OTN OH

Returns all TX overhead bytes to their factory default values.

TX/RX

Overhead bytes are organized using rows and columns structure as per G.709 standard.

Row 1

- **OA1** and **OA2**, columns 1-6, OTU FAS: All the Frame Alignment Signal **OA1** bytes and **OA2** bytes are individually configurable from **00** to **FF**. The default values are **F6** for all **OA1** bytes and **28** for all **OA2** bytes.
- **MFAS**, column 7, OTU MFAS: The Multi-Frame Alignment Signal byte is not configurable.

Test Functions

OH - OTN

- **SM**, columns 8-10, OTU OH: The Section Monitoring contains the following bytes.

The first SM byte (column 8) contains the TTI multiframe byte that is only configurable from *Traces (OTN)* on page 299.

The second SM byte (column 9) contains the BIP-8 byte that is automatically generated for each frame. This byte is not configurable.

The third SM byte (column 10) contains the following sub-fields. This byte is configurable from **00** (default) to **FF**.

Bit 1-4	Bit 5	Bit 6	Bit 7-8
BEI/BIAE	BDI	IAE	RES

- **GCC0**, columns 11-12, OTU OH: The two General Communication Channel-0 bytes are configurable from **00** (default) to **FF**.
- **RES**, columns 13-14, OTU OH: The two Reserved (RES) bytes are configurable from **00** (default) to **FF**.
- **RES**, column 15, OPU OH: The Reserved (RES) byte is configurable from **00** (default) to **FF**.
- **JC**, column 16, OPU OH:
 - Bits 1-6, Reserved (RES), are configurable from binary **000000** (default) to **111111**.
 - Bits 7-8, Justification Control (JC), are configurable from binary **00** (default) to **11**. Not available with ODU mux. Changing the JC value will corrupt the payload.

Row 2

- **RES**, columns 1-2, ODU OH: The two Reserved (RES) bytes are configurable from **00** (default for each byte) to **FF**.
- **PM & TCM**, column 3, ODU OH: The Path Monitoring and Tandem Connection Monitoring byte is configurable from **00** (default) to **FF**.
- **TCM ACT**, column 4, ODU OH: The Tandem Connection Monitoring Activation is configurable from **00** (default) to **FF**.
- **TCM6/TCM5/TCM4**, column 5-13, ODU OH: The Tandem Connection Monitoring overhead contains the following bytes.

The first TCMi byte contains the TTI multiframe byte and is only configurable from *Traces (OTN)* on page 299.

The second TCMi byte contains the BIP-8 byte and is automatically generated for each frame. This byte is not configurable.

The third TCMi byte contains the following sub-fields. This byte is configurable from **00** to **FF**. The default value is **00** when TCMi is disabled, and 01 when enabled.

Bit 1-4	Bit 5	Bit 6-8
BEI/BIAE	BDI	STAT

- **FTFL**, column 14, ODU OH: The Fault Type Fault Location multiframe byte is only configurable from *FTFL/PT* on page 155.
- **RES**, column 15, OPU OH: The Reserved (RES) byte is configurable from **00** (default) to **FF**.

Test Functions

OH - OTN

- **JC**, column 16, OPU OH:
 - Bits 1-6, Reserved (RES), are configurable from binary **000000** (default) to **111111**.
 - Bits 7-8, Justification Control (JC), are configurable from binary **00** (default) to **11**. Not available with ODU mux. Changing the JC value will corrupt the payload.

Row 3

- **TCM3/TCM2/TCM1**, columns 1-9, ODU OH: See *TCM6/TCM5/TCM4* on page 525 for more information.
- **PM**, column 10-12, ODU OH: The Path Monitoring overhead contains the following bytes.

The first PM byte (column 10) contains the TTI byte that is not configurable.

The second PM byte (column 11) contains the BIP-8 byte and is automatically generated for each frame. This byte is not configurable.

The third PM byte (column 12) contains the following sub-fields. This byte is configurable from **00** to **FF**. The default value is **01**.

Bit 1-4	Bit 5	Bit 6-8
BEI	BDI	STAT

- **EXP**, column 13-14, ODU OH: The two Experimental overhead bytes are configurable from **00** (default for each byte) to **FF**.
- **RES**, column 15, ODU OH: The Reserved (RES) bytes are configurable from **00** (default) to **FF**.

- **JC**, column 16, OPU OH:
 - Bits 1-6, Reserved (RES), are configurable from binary **000000** (default) to **111111**.
 - Bits 7-8, Justification Control (JC), are configurable from binary **00** (default) to **11**. Not available with ODU mux. Changing the JC value will corrupt the payload.

Row 4

- **GCC1**, column 1-2, ODU OH: The two General Communication Channel-1 bytes are configurable from **00** (default for each byte) to **FF**.
- **GCC2**, column 3-4, ODU OH: The two General Communication Channel-2 bytes are configurable from **00** (default for each byte) to **FF**.
- **APS/PCC**, column 5-8, ODU OH: The Automatic Protection Switching / Protection Communication Channel overhead bytes are defined in the ITU-T G.709 standard. These bytes are configurable from **00** (default) to **FF**.
- **RES**, column 9-14, ODU OH: The six Reserved (RES) bytes are configurable from **00** (default for each byte) to **FF**.
- **PSI**, column 15, OPU/ODU OH: Tap the PSI field to configure (TX) or display (RX) the Payload Structure Identifier.
 - **TX**: Select any TX byte from the list and its content is displayed below the list. Tap the **Edit** button to change its value.
 - **RX**: Select any RX byte from the list and its content is displayed below the list.
- **NJO**, column 16, ODU OH: The Negative Justification Opportunity byte is not configurable. Available either for non-concatenated signal or on the LO of a concatenated signal.

Test Functions

OH - OTN

RX

- **RX OH Byte Details** displays the content of the selected OH RX byte.
Tap on any OH RX byte to see its content
- **Legend TX/RX** indicates the path level for all OH bytes.

OH - SONET/SDH

The SONET/SDH OH page allows to modify (TX) the overhead information to be transmitted and to view (RX) the overhead information received.

From the **Test** menu, tap **Functions**, and the **OH** tab.

Tap on any overhead byte in TX to modify its value.

Tap on any overhead byte in RX to see its detailed content/value.

Note: *A byte in TX that has no value displayed or is grayed out, is not configurable from the OH tab.*

TX and RX Buttons (SDH)

Tap on the TX or RX button to respectively access the overhead bytes in transmission or receive mode.

STS-1 Timeslot/STM-1 Channel

Allows to select the timeslot number for the Transport OH bytes. The STS/AU/TU-3 overhead bytes are always for the timeslot selected in the test configuration. Furthermore when modifying the Transport OH bytes H1 SS bits, the modification applies to all timeslots when the test topology is **Coupled**. Choices are **1** (default) to **192** (SONET) / **64** (SDH) depending on the OC-N/STM-N interface selected.

Transport OH - Section/RS

- **A1 and A2:** Framing. The value should be hexadecimal **F6** for A1 and **28** for A2. They must appear in every STS-1/STM-1 frame of a composite signal.

SONET: Provide frame alignment of each STS-1 frame within a composite signal (STS-1 to STS-n).

SDH: Indicate the beginning of the STM-N frame.

- **J0/Z0**

- **J0:** The J0 (Trace) byte is used to trace the origin of an STS-1/STM-1 frame as it travels across the SONET/SDH network. This byte is only defined for the first STS-1/STM-1 frame of a composite signal. Available when the Trace format is set to 1 Byte (refer to *Traces (SONET/SDH)* on page 302).

- **Z0:** Growth.

SONET: The Z0 byte was used to uniquely identify the STS in question. This byte has to be defined in every STS-1 to STS-n frame of a composite signal. This byte is only defined for the STS-1 #2 to STS-1 #N of a OC-N signal.

SDH: These bytes are reserved for future international standardization. They are located at positions $S[1,6N+2]$ to $S[1,7N]$ of an STM-N signal ($N > 1$).

- **B1:** BIP-8 (Bit-Interleaved Parity) byte provides section error monitoring. This byte is only defined for the first STS-1/STM-1 frame of a composite signal. The byte is calculated by performing a routine even-parity check over all bits of the previous STS-N/STM-N frame of a composite signal.
- **E1:** Orderwire. Provides a 64 Kbit/s voice channel for communication between two STEs (Section Terminating Equipment). This byte is only defined for the first STS-1/STM-1 frame of a composite signal.

- **F1:** User/User Channel. This byte is reserved for user purposes. This byte is only defined for the first STS-1/STM-1 frame of a composite signal.
- **D1, D2, and D3:** Data Communications Channel (DCC). Provides a 192 Kbit/s data communication between two STEs for operation functions such as OAM&P. These bytes are only defined for the first STS-1/STM-1 frame of a composite signal.

Transport OH - Line/MS

- **H1 and H2:** Pointer.

SONET: H1 and H2 bytes are combined to form a pointer indicating where the path overhead begins within each SPE.

SDH: H1 and H2 bytes are combined to form a pointer indicating where the VC (Virtual Container) frame begins within each SPE.

Bits 5 and 6 of the H1 byte represent the SS bits and are configurable as follows.

SS Bits	Description
00	SONET
01	Undefined
10	SDH
11	Undefined

- **H3:** Pointer Action. H3 is an extra byte used to compensate for the SPE timing variation. The H1 and H2 pointer tell the receiver when the H3 pointer is used.

SONET: This byte must be defined in every STS-1 to STS-n frame of a composite signal.

SDH: This byte must be defined in every STM-1 of an STM-N signal in the event of negative justification, otherwise it is not defined.

➤ **B2: BIP-8**

SONET: The BIP-8 (Bit-Interleaved Parity) byte provides line error monitoring. This byte is only defined for the first STS-1/STM-1 frame of a composite signal. The byte is calculated by performing a routine even-parity check over all bits of the LOH and the STS-1 frame capacity of the previous frame of a composite signal (STS-1 to STS-n). Note that the SOH is not used to calculate the parity check.

SDH: The MS BIP-N*24 (Bit-Interleaved Parity) byte provides line error monitoring. The byte is calculated by performing a routine even-parity check over all bits of the MSOH and the STM-N frame of the previous STM-N frame. Note that the RSOH is not used to calculate the parity check.

➤ **K1 and K2: Automatic Protection Switching (APS):** The K1 and K2 bytes communicate APS between two LTE. These bytes are only defined for the first STS-1/STM-1 frame of a composite signal.

➤ **D4 through D12: Data Communications Channel (DCC):** The D4 through D12 bytes provide a 576 Kbit/s data communications channel between two LTEs for administration, monitoring and other communications. These bytes are only defined for the first STS-1/STM-1 frame of a composite signal.

➤ **S1/Z1 (SONET)**

S1: Synchronization Status: The S1 byte is used to carry the synchronization status of the SONET device. This byte is only defined for the first STS-1/STM-1 frame of a composite signal.

Z1: Growth. This byte is located in the second STS-1 through STS-n frame of a composite signal (STS-1 #2, STS-1 #3, up to STS-1 #N of a OC-N (N>3) signal).

➤ **S1 (SDH): Synchronization Status.** Bits 5 to 8 of the S1 byte are used to carry the synchronization messages of the SDH device. This byte is only defined for the first STS-1/STM-1 frame of a composite signal.

➤ **M0 or M1/Z2 (SONET)**

M0: REI-L: The M1 byte is used for line Remote Error Indication (REI-L)

- For STS-1e and OC-1: The M0 byte located in the STS-1 indicates BIP violations.

M0, bits 234 5678	Indicates
000 0000	0 BIP violation
000 0001	1 BIP violation
:	:
000 1000	8 BIP violations
000 1001 to 1111 1111	0 BIP violation

- For OC-192: The M0 bytes located in the STS-1 #4 indicates BIP violations when combined with the M1 byte (see M1 byte below for more information).

M1: REI-L. The M1 byte is used for line Remote Error Indication (REI-L).

- For STS-3e and OC-3: The M1 byte located in the STS-1 #3 indicates BIP violations.

M1, bits 234 5678	Indicates
000 0000	0 BIP violation
000 0001	1 BIP violation
:	:
001 1000	24 BIP violations
001 1001 to 1111 1111	0 BIP violation

Test Functions

OH - SONET/SDH

- For OC-12: The M1 byte located in the STS-1 #7 indicates BIP violations.

M1, bits 234 5678	Indicates
000 0000	0 BIP violation
000 0001	1 BIP violation
:	:
110 0000	96 BIP violations
110 0001 to 1111 1111	0 BIP violation

- For OC-48: The M1 byte located in the STS-1 #7 indicates BIP violations.

M1	Indicates
0000 0000	0 BIP violation
0000 0001	1 BIP violation
:	:
1111 1111	255 BIP violations

- For OC-192: Either the M1 byte located in the STS-1 #7, or the combination of the M0 and M1 bytes indicates BIP violations (refer to *REI-L Computation Method* on page 276).

For **M1 Only** computation method:

M1	Indicates
0000 0000	0 BIP violation
0000 0001	1 BIP violation
:	:
1111 1111	255 BIP violations

For **M0 and M1** computation method:

M0 Located in STS-1 #4	M1 Located in STS-1 #7	Indicates
0000 0000	0000 0000	0 BIP violation
0000 0000	0000 0001	1 BIP violation
:	:	:
0000 0110	0000 0000	1536 BIP violations
0000 0110 to 1111 1111	0000 0001 to 1111 1111	0 BIP violation

Z2: Growth. Available with OC-3, OC-12, and OC-48 signal, this byte is located in STS-1 #1 up to STS-1 #48 except for timeslots used by M0 and M1.

Undefined “--” for all other timeslots not covered by M0, M1, and Z2.

Test Functions

OH - SONET/SDH

➤ **M0 or M1 (SDH)**

M0: MS-REL. STM-1 channel #1 of a STM-0e and STM-0 signal.

M1: MS-REL. STM-1 channel #1 of a STM-1e and STM-1 signal;
channel #3 of an STM-N signal (N>1).

Undefined “--” for all other channels not covered by M0, and M1.

- **E2:** Orderwire. Provides a 64 Kbit/s voice channel for communication between LTEs. This byte is only defined for the first STS-1/STM-1 frame of a composite signal.

STS/AU/TU-3

- **J1:** Trace. Available when the Trace format is set to 1 Byte (refer to *Traces (SONET/SDH)* on page 302).

SONET: The J1 Trace byte provides a 16 or 64 byte fixed string to verify connection between path transmitting equipment and path receiving equipment.

SDH: The higher-order (AU)/low-order (TU) VC-N path trace byte provides a 64 byte fixed string to verify connection between path transmitting equipment and path receiving equipment.

- **B3:** BIP-8. The BIP-8 (Bit-Interleaved Parity) byte provides path error monitoring. The byte is calculated by performing a even-parity check over all bits of the previous SPE.

- **C2: Signal Label.** Entering a C2 byte value will automatically update the Path Signal Label (C2) selection and vice versa. Refer to *STS/AU Path (C2)* on page 176 for more information.


C2 (Hex.)	Description	
	SONET	SDH
00 ^a	Unequipped	UNEQ or supervisory-UNEQ
01	Equipped - Non-Specific	RES (Equipped - Non-Specific)
02	Floating VT Mode (Default)	TUG Structure
03	Locked VT Mode	Locked TU-n
04	Async Mapping for DS3	Async Mapping of 34M/45M in C-3
05	Mapping under development	Experimental Mapping
12	Async Mapping for 140M (DS4NA)	Async Mapping of 140M in C-4
13	Mapping for ATM	ATM Mapping
14	Mapping for DQDB	MAN DQDB
15	Async Mapping for FDDI	FDDI [3]-[11] Mapping
16	Mapping of HDLC over SONET	Mapping of HDLC/PPP
17	SDL with self-sync scrambler	RES (SDL self-synch scrambler)
18	Mapping of HDLC/LAPS	Mapping of HDLC/LAPS
19	SDL with a set-reset scrambler	RES (SDL set-reset scrambler)
1A	10 Gbit/s Ethernet (IEEE 802.3)	10 Gbit/s Ethernet (IEEE 802.3)
1B	GFP	GFP
1C	Not supported	Mapping 10 Gbit/s FC
20	Not supported	Async Mapping of ODUk
CF	RES (Obsolete HDLC/PPP framed)	RES (obsolete HDLC/PPP framed)
E1 ^a to FC ^a	STS-1 w/1 VTx PD, STS-1 w/2 VTx PD, ... STS-1 w/28 VTx or STS-n/nc PD	Not supported
FE	Test Signal, ITU-T 0.181	Test Signal, ITU-T 0.181
FF ^a	STS SPE AIS (TCM)	VC-AIS (TCM)

- a. These values cannot be selected as Expected Path Signal Label.

Test Functions

OH - SONET/SDH

- **G1:** Path Status. The G1 byte provides a method to communicate the far-end path status back to the path originating equipment.



REI:

Bits 1 to 4 of G1	Description
0000	No error
0001	1 error
0010	2 errors
:	:
1000	8 errors
1001 to 1111	No error

RDI/ERDI:

Bits 5, 6, 7 of G1	Description
000, 001, 011	No defect
100, 111	RDI
010	ERDI-PD
101	ERDI-SD
110	ERDI-CD

- **F2:** User Channel. The User Channel provides a 64 Kbit/s channel for communication between two PTEs. This byte is only defined for the first STS-1/STM-1 frame of a composite signal.
- **H4:** Multiframe Indicator. The H4 byte provides a multiframe phase indication of a VT/TU payload.


- **Z3 and Z4:**
SONET only: Growth.
- **F3:**
SDH only: User Channel. The Path User Channel provides a channel for communication purposes between path elements and is payload dependent.
- **K3:**
SDH only: Automatic Protection Switching (APS). Bits 1 to 4 of the K3 byte are used for APS signaling. K3 bits 5 to 8 are reserved for future use.
- **N1:**
SONET: The N1 byte (formerly referred to as the Z5 byte) is allocated for Tandem Connection Maintenance (TCM) and the Path Data Channel.

SDH: (Network operator byte) The N1 byte is allocated to provide a Higher-Order Tandem Connection Monitoring (HO-TCM) function.

VT/TU

➤ V5 VT/TU Path Overhead

The V5 byte is allocated to indicate the content of the VT/TU path, including the status of the mapped payloads. It provides the same functions for VT/VC paths that the B3, C2, and G1 bytes provide for STS/STM paths.



- **BIP-2** is not configurable.
- **REI, RFI, and RDI:** Choices are **0** (disabled), and **1** (enabled).
- Signal Label

Bits 5, 6, 7 of V5	Description	
	SONET	SDH
000 ^a	Unequipped	Unequipped or supervisory-unequipped
001	Reserved (Equipped - Non-specific)	
010	Asynchronous	
011	Bit Synchronous	
100	Byte Synchronous	
101	Extended Signal Label	
110	Test Signal, ITU-T 0.181 specific mapping	
111 ^a	VT SPE AIS (TCM)	VC-AIS (TCM)

a. These bytes cannot be selected in receive mode.

If the signal label in V5 (bits 5, 6, and 7) is 101 the contents of the extended signal label is valid and contains in a 32 bit multiframe as shown below. See Z7/K4 Structure shown below.

Z7/K4 Structure

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
Multiframe Alignment Signal											Extended Signal Label								0	R	R	R	R	R	R	R	R	R	R	R	
Frame Count					Sequence Indicator																										

R = Reserved

- **J2 Trace.** Available when the Trace format is set to 1 Byte (refer to *Traces (SONET/SDH)* on page 302).

SONET: VT Path Trace: The J2 Trace byte provides a 16 or 64 bytes fixed string allowing the receiving VT PTE to verify its continued connection to the intended transmitting VT PTE.

SDH: Path Trace: The J2 byte is used to repetitively transmit a Lower-Order Access Path Identifier so that a path receiving terminal can verify its continued connection to the intended transmitter.
- **Z6/N2**


Z6 (SONET): VT Tandem Connection Monitoring or VT Path Growth. The Z6 byte is allocated for future growth.

N2 (SDH): (Network operator byte) Tandem Connection Monitoring for the VC2, VC-12, and VC-11 level.

Test Functions

OH - SONET/SDH

➤ Z7 /K4 : Extended signal label

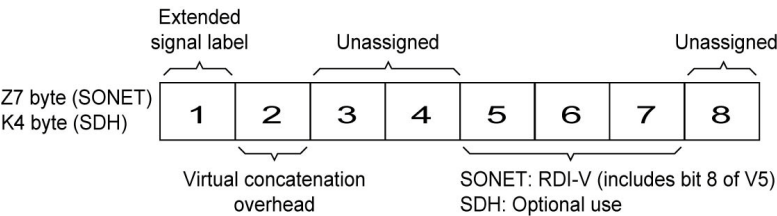

Bits	Description	
	Z7 (SONET)	K4 (SDH)
1	Extended signal label. Bits 12 to 19 of the 32 bit frame multiframe (see Z7/K4 Structure on page 541) contain the extended signal label.	
2	Virtual concatenation. Bits 1 to 5 of the 32 bit frame multiframe (see Z7/K4 Structure on page 541) contain the LO virtual concatenation frame count while bits 6 to 11 contain the LO virtual concatenation sequence indicator.	
3 - 4	unassigned and reserved for APS signaling for protection at the lower order path level.	
5 - 7	These bits in combination with bit 8 of V5 are allocated for RDI -V/ERDI-V signal	Optional use.
8	unassigned and reserved for a lower order path data link.	

Default all OH

Returns all TX overhead bytes to their factory default values.

Ping & Trace Route

From the **Test** menu, tap **Functions**, and the **Ping & Trace Route** tab.

P1 and P2 Buttons

The **P1** and **P2** buttons, available with **Dual Port** topology, allow to respectively display the alarms/errors for port #1 (**P1**) or port #2 (**P2**).

Source IP Address

Displays the configured **Source IP Address**. Refer to *MAC/IP/UDP* on page 183 for RFC 2544 and EtherBERT tests, and to *Smart Loopback* on page 279 for Smart Loopback test.

Destination IP Address

Enter the **Destination IP Address** of the network device to be detected. The destination IP address is configurable only with **IPv4 Network Layer** (refer to *Modify Structure Button* on page 100). The accepted range for IPv4 is **0.0.0.0** (default) to **255.255.255.255**.

The default setting for IPv6 is **2001:0000:0000:0000:0000:0000:0000** or is set automatically to the IP address of the target module from the Remote Loopback mode. The destination IP address is configured only when **Ethernet/IPv6/UDP** is selected. The **IPv6 Address** can either be the **Link-Local IPv6 Address** or the **Global IPv6 Address**. The acceptable range for IPv6 is from **000:0000:0000:0000:0000:0000:0000:0001** to **FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF**.

Stream

Stream is available with EtherSAM and Traffic Gen & Mon and allows to select a stream/service to use its source and destination IP addresses for the Ping and Trace Route tests.

Use Stream

Use Stream is available with test application using stream/services and allows to use the source and destination IP of the defined or selected stream/services.

Ping

- **Data Size (Bytes):** Enter the data size that will be sent to the network device to be detected. Choices are **0** to **1452 bytes**; **32 bytes** by default.
- **TTL** for IPv4 and **Hop Limit (TTL)** for IPv6: Enter the maximum number of hops the packet can go through. Choices are **1** to **255**; **128** by default.
- **IP TOS/DS** for IPv4 and **Traffic Class (TOS/DS)** for IPv6: Enter the type of service. Choices are **00** (default) to **FF**.
- **Flow Label** (IPv6) value acceptable range is from **0** (default) to **1048575**.
- **Timeout (ms):** Enter the maximum time allowed between an ICMP echo and response. Choices are **200 ms** to **10000 s**; **4000 ms** by default.
- **Delay (ms):** Enter the delay between each attempt (PING). Choices are **100** to **10000 ms**; **1000 ms** by default.
- **Attempts:** Select **n-Attempts** to specify the number of ping requests to send following a ping activation or select **Continuous** to ping continuously until manually stopped. If **n-Attempts** is selected, enter the number of ping attempts from **1** to **100**. The default setting is **n-Attempts** with **4** attempts.
- **Ping** button starts the ping tool with the specified settings.

Trace Route

- **Max Hop Count:** Enter the maximum network device the packet is allowed to go through. Choices are **1** to **255**; **128** by default.
- **Timeout (ms):** Enter the maximum time allowed between an ICMP echo and response at each hop. Choices are **200 ms** to **10000 ms**; **4000 ms** by default.
- **Trace Route** button starts the trace route tool with the specified settings.

Results

To succeed, a ping command shall be acknowledged by the network device within a given delay (**Timeout**). Typically a ping command can fail for the following reasons:

- The IP address is unavailable or unknown.
- The time allowed to perform the ping command is too short.
- The remote device is not supporting ICMP messaging.

To succeed, a trace route command shall be acknowledged by the network device within a given delay (Timeout). Typically a trace route command can fail for the following reasons:

- The IP address is unavailable or unknown.
- The time allowed to perform the trace route command is too short.
- The remote device is not supporting ICMP messaging.

The ping and trace route results are displayed with the following columns:

- **No.:** Indicates the attempt number.

Test Functions

Ping & Trace Route

➤ **Status:** Indicates the status of the attempt as follows:

Status	Description
Successful	Valid ICMP echo reply received.
User Aborted	When a user has manually stopped the ping/trace route function before the end of attempts.
Time Out	When an ICMP echo reply was not received within the defined timeout.
Destination Invalid	With reserved IP addresses: For IPv4: 0.0.0.0, 127.0.0.0, and all addresses above 240.0.0.0 (Class E and above). For IPv6: 0::/8 (reserved/unspecified), 0::1/128 (Loopback), FF00::/8 (Multicast).
TTL Expired (ping test)	When the number of TTL was insufficient to reach the destination host.
Hop Reached (trace route test)	When a Time Exceeded message is received from a host while executing the trace route function.
Destination Unreachable	For IPv4: When the IP address is unreachable (no default gateway for an IP address, not in the same subnet, or an ICMP Unreachable message is received). For IPv6: When the IP address is unreachable (no default gateway for an IP address, not in the same subnet, or address resolution failed or an ICMP Destination Unreachable message is received).
Data Corrupted	Parameter problem message is received or data corruption is found for IPv4.
Discarded	Congestion has been detected and the request cannot be transmitted.
Packet Too Big	Packet Too Big message is received in response to a packet that the router cannot forward because the packet is larger than the MTU of the outgoing link. It is only applicable for the IPv6 version .
Undefined	For any other errors in ping/trace route that do not fall into one of the above description.

➤ **Replied Details**

For ping, indicates the IP address of the replier, the buffer size of the ICMP echo response, the time of response in milliseconds, and the TTL of the ICMP echo response.

For trace route, indicates the IP address of the replier, and the time of response in milliseconds.

Statistics

➤ **Packets Transmitted** indicates the number of sent packets.

➤ **Packets Received** indicates the number of received packets.

The following statistics are only available for the ping test.

➤ **Percentage Lost (%)** indicates the percentage of packets lost.

➤ **Min Round Trip Time (ms)** indicates the minimum time recorded for a ping request to be answered.

➤ **Max Round Trip Time (ms)** indicates the maximum time recorded for a ping request to be answered.

➤ **Avg. Round Trip Time (ms)** indicates the average time required for a ping request to be answered.

Pointer Adjustment

From the **Test** menu, tap **Functions**, and the **Pointer Adjustment** tab.

TX Pointer Adjustment

Note: *Only available in **Coupled** topology.*

The pointer adjustment supports two modes of operation: **Manual** and **Sequence**. Both modes offer the generation of pointer events even when the test is not started.

TX Pointer Adjustment - Manual Button

Step

➤ Value

For STS/AU: Select the number of positive (Increment) or negative (Decrement) pointer adjustments to include into the STS-n (SONET) or AU-n (SDH): **1** (default) to **1000**. For multiple pointer adjustments, the pointer adjustment rate is 1 adjustment at every 4 frames.

For VT/TU: Select the number of positive (Increment) or negative (Decrement) pointer adjustment to include into the VTn (SONET) or TU-n (SDH): **1** (default) to **1000**. For multiple pointer adjustments, the pointer adjustment rate is 1 adjustment at every 4 multiframes.

- **Increment** button sends the positive pointer adjustment defined.
- **Decrement** button sends the negative pointer adjustment defined.
- **Pointer Value** indicates the current pointer value.

Jump

- **New Pointer** allows to select a new pointer value:

For STS/AU: **0** (default) to **782**

For VT/TU:

Path	Range
VT1.5	0 to 103
VT2	0 to 139
TU-3	0 to 764
TU-11	0 to 103
TU-12	0 to 139

- **Inject** button sends the new pointer value.
- **New Data Flag** (NDF) check box when selected inserts a New Data Flag with the pointer adjustment when the Inject button is tapped.

For STS/AU: When NDF is enabled, bits 1 to 4 of the pointer word (H1 and H2 bytes) are set to **1001** when executing a pointer jump.

For VT/TU: When NDF is enabled, bits 1 to 4 of the pointer word (V1 and V2 bytes) are set to **1001** when executing a pointer jump.

TX Pointer Adjustment - Sequence Button

Note: The pointer sequence is only supported on one test layer; either on VT/TU layer or on STS/AU when the test doesn't contain VT/TU mapping. The field next to the **Sequence** operation mode button indicates the path level used for the sequence pointer adjustment.


- **Sequence: T.105-03/GR-253** allows the selection of the pointer sequence pattern based on the **T.105-03/GR-253** standard.

Pointer Sequence Pattern	Available with
Single pointers of opposite polarity	AU-x, TU-3, TU-11, TU-12
Regular pointers plus one double pointer	AU-x, TU-3, TU-11, TU-12
Regular pointers with one missing pointer	AU-x, TU-3, TU-11, TU-12
Double pointers of opposite polarity	AU-x, TU-3, TU-11, TU-12
Single pointer adjustment	STS-x, VT1.5, VT2, AU-x, TU-3, TU-11, TU-12
Burst pointer adjustment	STS-x, VT1.5, VT2, AU-x, TU-3, TU-11, TU-12
Phase transient	STS-x, VT1.5, VT2, AU-x, TU-3, TU-11, TU-12
Periodic pointer adjustment 87-3 pattern	STS-x, AU-x, TU-3
Periodic 87-3 with Add	STS-x, AU-x, TU-3
Periodic 87-3 with Cancel	STS-x, AU-x, TU-3
Periodic pointer adjustment continuous	STS-x, VT1.5, VT2, AU-x, TU-3, TU-11, TU-12
Periodic pointer adjustment continuous with Add	STS-x, VT1.5, VT2, AU-x, TU-3, TU-11, TU-12
Periodic pointer adjustment continuous with Cancel	STS-x, VT1.5, VT2, AU-x, TU-3, TU-11, TU-12
Periodic pointer adjustment 26-1 pattern	VT1.5, TU-11
Periodic 26-1 with Add	VT1.5, TU-11
Periodic 26-1 with Cancel	VT1.5, TU-11

► Initialization / Cool Down / Sequence

The following time line examples show the initialization, cool down, and the pointer sequence according to the selected sequence and parameters.

Example 1: **Periodic 87-3 with Cancel**

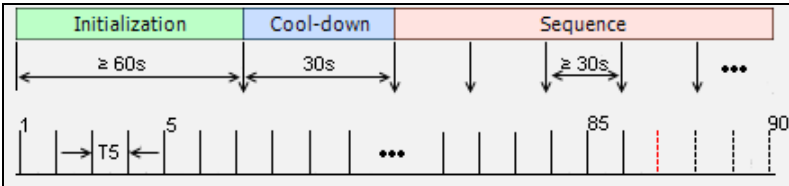

Example 2: **Regular pointers plus one double pointer**



Legend:

	Description
	When located at the end (right) of the sequence, indicates a continuous repetition of the pointer sequence. When located within the sequence, indicates a repetition of pointers.
	Regular pointer event or sequence.
	Cancel event.
	Special event like an extra cancel event (for example in Periodic 87-3 with Cancel) or a missing event from the Regular pointers with one missing pointer sequence.
	Special event like add, double pointer, etc.
	Indicates that the sequence is periodic with special event.

Test Functions


Pointer Adjustment

- **T1 to T6** are configurable duration parameters. The range of the duration parameters as well as their availability versus pointer sequence are described in the following table.

Pointer Sequence Pattern	Parameter	Duration range
Single pointers of opposite polarity	T1	10 to 30 s (default 10 s)
Regular pointers plus one double pointer	T2	AU/TU-3: 7.5 ms to 30 s (default 0.333 s) TU-11/12: 0.2 s to 30 s (default 0.75 s)
	T3	AU/TU-3: 0.5 ms TU-11/12: 2 ms
Regular pointers with one missing pointer	T2	AU/TU-3: 7.5 ms to 30 s (default 0.333 s) TU-11/12: 0.2 s to 30 s (default 0.75 s)
Double pointers of opposite polarity	T1	10 to 30 s (default 10 s)
	T3	STS-x/AU-x/TU-3: 0.5 ms to 1 s (default 0.5 ms) VT-x/TU-11/12: 2 ms to 1 s (default 2 ms)
Single pointer adjustment	T6	30 to 60 s (default 30 s)
Burst pointer adjustment	T4	STS-x/AU-x/TU-3: 0.5 ms VT-x/TU-11/12: 2ms
	T6	30 to 60 s (default 30 s)
Phase transient	T6	30 to 60 s (default 30 s)
Periodic pointer adjustment 87-3 pattern	T5	7.5 ms to 10 s (default 0.333 s)
Periodic 87-3 with Add	T4	0.5 ms
	T5	7.5 ms to 10 s (default 0.333 s)
Periodic 87-3 with Cancel	T5	7.5 ms to 10 s (default 0.333 s)
Periodic pointer adjustment continuous	T5	STS-x/AU-x/TU-3: 7.5 ms to 10 s (default 0.333 s) VT-x/TU-11/12: 0.2 s to 10s (default 1 s)
Periodic pointer adjustment continuous with Add	T4	STS-x/AU-x/TU-3: 0.5 ms VT-x/TU-11/12: 2 ms
	T5	STS-x/AU-x/TU-3: 7.5 ms to 10 s (default 0.333 s) VT-x/TU-11/12: 0.2 s to 10 s (default 1 s)
Periodic pointer adjustment continuous with Cancel	T5	STS-x/AU-x/TU-3: 7.5 ms to 10 s (default 0.333 s) VT-x/TU-11/12: 0.2 s to 10 s (default 1 s)
Periodic pointer adjustment 26-1 pattern	T5	0.2 s to 10 s (default 1 s)
Periodic 26-1 with Add	T4	2 ms
	T5	0.2 s to 10 s (default 1 s)
Periodic 26-1 with Cancel	T5	0.2 s to 10 s (default 1 s)

- **T1 (s)** represents the interval between two pointer events.

Example of **Single pointer of opposite polarity** sequence.

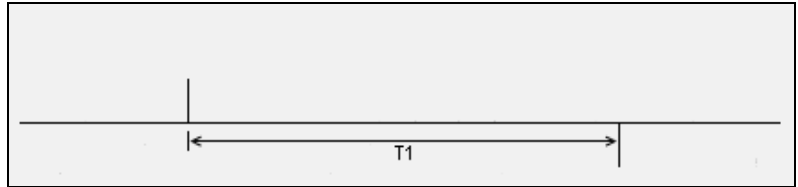


- **T2 (s)** represents the interval between successions of pointer events.

Example of **Regular pointers with one missing pointer** sequence.



- **T3 (ms)** represents the interval between back to back pointer events.

Example of **Regular pointers plus one double pointer** sequence.

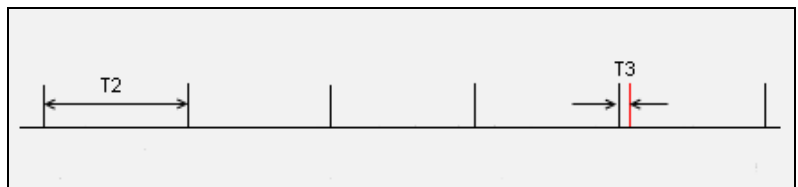


Test Functions

Pointer Adjustment


- **T4 (ms)** represents the interval between back to back pointer events in periodic pointer sequence.

Example of **Burst pointer adjustment** sequence.

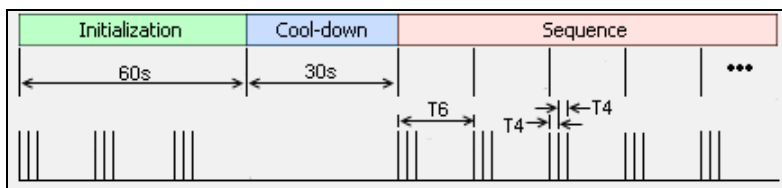


- **T5 (s)** represents the interval between successions of pointer events in a Periodic pointer sequence.

Example of **Periodic 87-3 with Cancel** sequence.

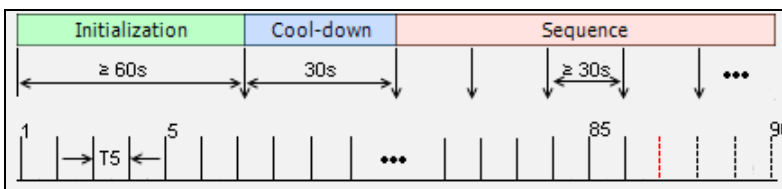

- **T6 (s)** represents the interval between successions of pointer events.

Example of **Phase transient** sequence.

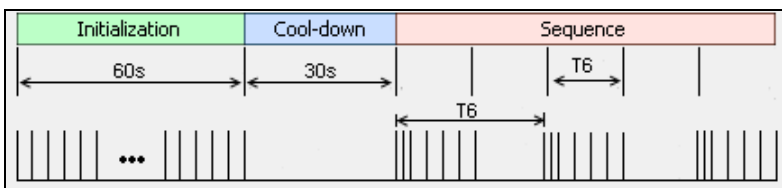

- **Increment/Decrement** allows to determine if the pointer sequence will increment (positive) or decrement (negative) the pointer values.
- **Periodic** check box when selected, generates the pointer sequence continuously. The pointer sequence is generated only once when the **Periodic** check box is cleared. The capability to clear the **Periodic** check box is only available for the following pointer sequences:
 - Single pointers of opposite polarity
 - Regular pointers plus one double pointer
 - Regular pointers with one missing pointer
 - Double pointers of opposite polarity
- **Init-Cool** check box when selected, generates pointer action with three phases: initialization, Cool-down, and pointer sequence. Only the pointer sequence is generated when the **Init-Cool** check box is cleared.
- **Status** indicates the pointer event activity status.
 - **Initialization** indicates that the pointer sequence test is started and is running the initialization phase.
 - **Cool-down** indicates that the pointer sequence test is started and is running the cool down phase.
 - **Sequence** indicates that the pointer sequence test is started and is running the sequence phase; this phase runs until the Sequence is turn off.
 - **Static pointer** indicates that the pointer sequence is not started. The signal generator transmits a fix pointer value.
- **Pointer Value** indicates the current pointer value. Available even if the test is not started or if the sequence is not enabled.

Test Functions

Pointer Adjustment

- **Sequence** button when enabled, generates pointer events on a regular basis. The initialization and cool down sequence are described below for each pointer sequence pattern.

Pointer Sequence Pattern	Initialization	Cool down
Single pointers of opposite polarity	Basic sequence ^{ab} Duration ≥ 60 sec	Basic sequence ^{ab} Duration = 30 sec
Regular pointers plus one double pointer	Add sequence Duration ≥ 60 sec	Add sequence Duration = 30 sec
Regular pointers with one missing pointer	Cancel sequence Duration ≥ 60 sec	Cancel sequence Duration = 30 sec
Double pointers of opposite polarity	Basic sequence ^{ab} Duration ≥ 60 sec	Basic sequence ^{ab} Duration = 30 sec
Single pointer adjustment	One pointer event per second Duration = 60 sec	No pointer event Duration = 30 sec
Burst pointer adjustment		
Phase transient		
Periodic pointer adjustment 87-3 pattern	Basic sequence ^a Duration ≥ 60 sec	Basic sequence ^a Duration = 30 sec
Periodic 87-3 with Add		Add sequence Duration = 30 sec
Periodic 87-3 with Cancel		Cancel sequence Duration = 30 sec
Periodic pointer adjustment continuous	Basic sequence ^a Duration = 60 sec	Basic sequence ^a Duration = 30 sec
Periodic pointer adjustment continuous with Add		Add sequence Duration = 30 sec
Periodic pointer adjustment continuous with Cancel		Cancel sequence Duration = 30 sec
Periodic pointer adjustment 26-1 pattern	Basic sequence ^a Duration ≥ 60 sec	Basic sequence ^a Duration = 30 sec
Periodic 26-1 with Add		Add sequence Duration = 30 sec
Periodic 26-1 with Cancel		Cancel sequence Duration = 30 sec

- The basic sequence corresponds to the pointer event pattern defined in the standard without any Add or extra Cancel event.
- Only available when the **Periodic** check box is selected.

RX Pointer Adjustment

➤ **Pointer Value**

For STS/AU: Displays the value for the pointer, H1 and H2, indicating the offset in bytes between the pointer and the first byte of the STS-n (SONET) or AU-n (SDH).

For VT/TU: Displays the value of the pointer, V1 and V2, indicating the offset in bytes between the pointer and the first byte of the VTn (SONET) or TU-n (SDH) of the high order path. However, TU-3 considered a low order path, uses the H1, H2, H3 bytes for its location.

- **Cumulative Offset** indicates the difference between the pointer increment and the pointer decrement. A pointer jump will reset this value to **0**.
- **Ptr. Incr.** (Pointer Increment) gives statistics on positive pointer adjustment detected.
- **Ptr. Decr.** (Pointer Decrement) gives statistics on negative pointer adjustment detected.
- **NDF** (New Data Flag) gives statistics on pointer jumps containing a New Data Flag.

For STS/AU: Bits 1 to 4 of the pointer word (H1 and H2) detected are **1001**.

For VT/TU: Bits 1 to 4 of the pointer word (V1 and V2) detected are **1001**.

- **No NDF** (No New Data Flag) gives statistics on normal pointer jumps containing no NDF.

For STS/AU: Bit 1 to 4 of the pointer word (H1 and H2) detected are **0110**.

For VT/TU: Bit 1 to 4 of the pointer word (V1 and V2) detected are **0110**.

RTD

Note: *Not available in Decoupled, or Through mode.*

Round Trip Delay (RTD) measurements are needed to quantify the time it takes for a signal to cross the network and come back. Usually, transport delay is due to two factors: long configured paths and transit times through the network elements along the path. Therefore, RTD measurements are significant in systems that require two-way interactive communication, such as voice telephony, or data systems where the round-trip time directly affects the throughput rate.

From the **Test** menu, tap **Functions**, and the **RTD** tab.

Note: *To do Round Trip Delay test, the remote NE should be configured to provide a loopback. However a local DSn test can be configured to use loopback codes allowing RTD testing.*

Note: *Be aware that RTD requires error free operation conditions to provide reliable results. Therefore, RTD results could be affected by error injection or error introduced by the network.*

Mode

Allows the selection of the round trip delay test mode. Choices are **Single** (default) and **Continuous**. For CPRI/OBSAI test application, RTD operates in **Single** mode only.

- **Single** allows testing the round trip delay once.
- **Continuous** allows testing the round trip delay continuously in a repetitive manner (one RTD measurement every 2 seconds).

Measure Delay Button

Allows enabling the round trip delay measurement.

For **Single** mode, the test is performed once and stops (the **Measure Delay** button turns off by itself). The **Measure Delay** button is only available when the test is running.

For **Continuous** mode, the test is performed continuously until the RTD test or the test case itself is stopped. However, the measurement will only start if the test is running or when it will be started. The **Measure Delay** button turns off by itself when the auto-calibration fails.

Note: *The Round Trip Delay (RTD) auto-calibration generates some bit errors when turning on the RTD measurement while the test is running or when starting the test while the **Measure Delay** button is enabled. A far end testing equipment will detect those bit errors.*

Status

Indicates the test status of the RTD test. The status is only available when the test case is running.

- **Ready** indicates that the last calibration sequence has been successful and the test is now ready to perform RTD measurement.
- **Running** indicates that the RTD test is running.
- **Cancelled** indicates that the RTD test has been stopped before its completion.
- **Calibration Failed** indicates that the test calibration failed due to at least one of the following conditions:
 - Internal errors.
 - Presence of high number of bit errors.

Therefore the RTD statistics becomes unavailable since the test does not allow RTD testing.

Test Functions

RTD

- **Disabled:** Indicates that the RTD feature is disabled. For example, this condition occurs for DS0/E0 test case having all its timeslots set to Idle/Tone.
- **--:** Indicates that the RTD measurement is not ready.

Reset

Resets the RTD results and measurement counts.

Delay

Indicates the time required for a bit to travel from the transmitter back to its receiver after crossing a far-end loopback.

- **Last** indicates the result of the last Round Trip Delay measurement.
- **Minimum** indicates the minimum Round Trip Delay recorded.
- **Maximum** indicates the maximum Round Trip Delay recorded.
- **Average** indicates the average Round Trip Delay value.
- **Unit** measurement selections are **ms** (default) and **μs**.

Count

Indicates the total number of successful and failed measurements.

Successful: A measurement is declared successful when the RTD is smaller or equal to 2 seconds.

Failed: A measurement is declared failed when the RTD is > 2 seconds.


RTD (CPRI Framed L2)

Note: Only available with CPRI Framed L2 in **Base Station** emulation mode.

Round Trip Delay (RTD) measurements are needed to quantify the time it takes for a signal to cross the remote radio head and come back.

Note: Be aware that RTD requires error free operation conditions to provide reliable results. Therefore, RTD results could be affected by error injection or error introduced by the network.

From the **Test** menu, tap **Functions**, and the **RTD** tab.

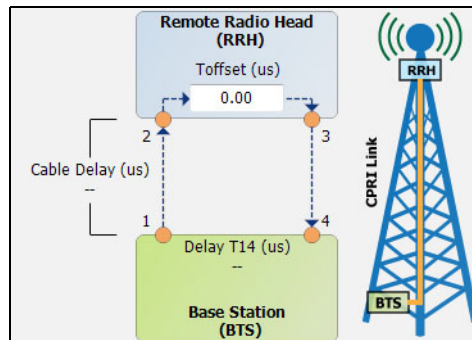

P1 and **P2** buttons, available with **Dual Port** topology, allow to select the port to be displayed.

Round Trip Delay

Indicates the time required for a bit to travel from one point to another.

- **Delay T14** indicates the round trip delay measurement from the Base Station going through the Remote Radio Head (including **Toffset**) and back to the Base Station. The **Delay T14** appearing on the diagram corresponds to the average value.
- **Cable Delay** indicates the cable delay measured from the Base Station to the Remote Radio Head (RRH) or vice-versa assuming that the cabling in both directions are the same. The **Cable Delay** appearing on the diagram corresponds to the average value.
- **Last** indicates the result of the last delay measurement.
- **Minimum** indicates the minimum delay recorded.
- **Maximum** indicates the maximum delay recorded.
- **Average** indicates the average delay value.
- **Unit** measurement selections are **μs** (default) and **ns**.
- **Toffset** allows the configuration of the internal delay introduced by the electronic components in the Radio Equipment (RE): 0 μs (default) to 66.67 μs.

Note: A warning icon appears next to the **Toffset** value when this value is larger than the **Delay T14** value measured indicating that the **Toffset** configured value maybe invalid thus corrupting the **Cable Delay** values reported.

S-OAM Link Trace

From the **Test** menu, tap **Functions**, and the **S-OAM Link Trace** tab.

Link Trace

- **Priority**¹ allows to select the VLAN user priority: **0** (default) to **7**. Refer to *VLAN ID and Priority* on page 679 for more information.
- **Drop Eligible**¹ is set to **No** (no frames will be dropped when congestion occurs) and is not configurable.
- **TTL** sets the Time To Live value: **1** to **255** (default is **128**).
- **Link Trace** button when ON (OFF by default) starts the link trace process. The **Link Trace** button turn OFF automatically once the link trace process is completed.

Result

The table reports the following information for each valid LTR frames received in response to the last LTM frame sent: **TTL**, **MEP/MIP MAC Address**, **Forward**, and **Term MEP**.

- **Last Link Trace Status** displays the last link trace status.

Status	Description
Pending	No Results
Successful	Last Link Trace was successful
Failed – LTR Timeout	Last Link Trace failed due to a LTR Timeout
Failed – Invalid LTR	Last Link Trace failed due to an Invalid LTR

- **TX LTM** indicates the count of transmitted LTM frames.

1. Available when VLAN is enabled (see *VLAN* on page 203).

Test Functions

S-OAM Link Trace

- **RX LTR** indicates the count of received LTR frames having their destination MAC address matching the unit port MAC address, and VLANs matching the unit port VLANs.
- **LTR Timeout** indicates the count of LTR Timeout event which occurs if a reply (LTR) from the Peer MEP is not received within 5 seconds.
- **Invalid LTR** indicates the count of LTR frames received with incorrect MEG/MD Level or Transaction ID.

Signaling Bits

Signaling Bits is only available for **DSn/PDH BERT** test with DS1 interface, DS0 enabled, and SF, ESF, or SLC-96 framing.

From the **Test** menu, tap **Functions** and the **Signaling Bits** tab.

The monitoring of signaling bits of the 24 - DS0 channels is performed when test is running. Two signaling bits (**AB**) are monitored for SF or SLC-96 framing while four signaling bits (**ABCD**) are monitored for ESF.

Spare Bits

Note: *Spare Bits are not available when the framing is set to **Unframed**.*

From the **Test** menu, tap **Functions**, tap the **Spare Bits** tab.

TX

Tap a spare bits field to set its value.

Note: *All spare bits are reserved for national use and should be set to 1 when not used.*

➤ E4

G.751 Bit 14, 15, 16: Choices are **000** to **111** (default).

➤ E3

G.751 Bit 12: Choices are **0** and **1** (default).

➤ E1

- **S_{i0}** is located in the bit 1 of the frame containing the frame alignment signal (FAS). Choices are **0** and **1** (default).
- **S_{i1}** is located in the bit 1 of the frame not containing the frame alignment signal (FAS). Choices are **0** and **1** (default).
- **S_{a4}** to **S_{a8}** are located in bit 4 to 8 of frame number 1, 3, 5, and 7 of sub-multiframe 1 and 2. Choices are **0** and **1** (default) or **0000** to **1111** (default) depending on the selected framing.
- **TS16 Frame 0 Bit 5, 7, 8** are located in bit 5, 7, and 8 from Timeslot 16 of frame 0 of a E1 signal. Choices are **000** to **111** (default).

RX

➤ E4

G.751 Bit 14, 15, 16 are reserved for national use.

➤ E3

G.751 Bit 12 is reserved for national use.

➤ E2

G.742 Bit 12 represents Bit 12 from Timeslot 1, 2, 3, and 4 respectively.

➤ E1

➤ **S_{i0}** is located in the bit 1 of the frame containing the frame alignment signal (FAS).

➤ **S_{i1}** is located in the bit 1 of the frame not containing the frame alignment signal (FAS).

➤ **S_{a4} to S_{a8}** are located in bit 4 to 8 of frame number 1, 3, 5, and 7 of sub-multiframe 1 and 2. Possible values are either **0** and **1** or **0000** to **1111** depending on the framing.

➤ **TS16 Frame 0 Bit 5, 7, 8** are located in bit 5, 7, and 8 from Timeslot 16 of frame 0 of a E1 signal.

Traffic Scan

The traffic scan tool provides the capability to discover and monitor VLAN traffic flows on the network.

Note: *Not available with dual port test and when **Provider Encapsulation** is used.*

From the **Test** menu, tap **Functions**, and the **Traffic Scan** tab.

Level

Allows the selection of the criteria that will be used to filter the incoming VLAN traffic flows. The default setting is **All**. Choices are:

Level	Description
All	Monitors untagged frames and up to 3 levels of stacked VLAN frames
Untagged	Monitors untagged frames only (no VLAN)
C-VLAN	Discovers/monitors only frames where the outer VLAN is a C-VLAN (TPID of 0x8100)
S-VLAN	Discovers/monitors only frames where the outer VLAN is a S-VLAN (TPID of 0x8100, 0x88A8, 0x9100, 0x9200, or 0x9300)
E-VLAN	Discovers/monitors only frames where the outer VLAN is a E-VLAN (TPID of 0x8100, 0x88A8, 0x9100, 0x9200, or 0x9300)

Rate Layer

Allows the selection of the rate unit used for **Link Rate** and **Rate** statistics.

- **Line Utilization** is used to express the real line rate including the Preamble, SFD, and IFG.
- **Ethernet BW** (Bandwidth) is used to express the Ethernet bandwidth rate excluding the Preamble, SFD, and IFG.

Discovered

Indicates the number of different traffic flows monitored based on the scan criteria.

Link Rate (Mbit/s)

Indicates the network link rate based on the received frames with a valid FCS regardless if the frame matches or not the traffic flows, and regardless if the traffic flow was ignored due to the limit reached (see *Limit Reached*). The rate is expressed either in **Line Utilization** or **Ethernet Bandwidth** depending on the **Rate Layer** selected.

Limit Reached

Up to 128 different traffic flows can be monitored, the **Limit Reached** text appears with a red background next to the **Discovered** field when the limit is reached.

Scan

Starts/stops the traffic scan test.

Monitored Frames Table

Statistics are gathered for each different traffic flow matching the scan criteria. Each different monitored traffic flow creates a separate entry in the scan table. When the limit is reached, new traffic flows are not considered in the table but the existing traffic flows are still monitored.

The level of VLAN (untagged, E-VLAN, S-VLAN, C-VLAN), and values of VLAN ID, Priority, and TPID are used to identify a traffic flow. Any difference in one of these values will create a separated entry in the table. PBB-TE frames are ignored.

Note: *Scan statistics are cleared when restarting the scan.*

➤ E-VLAN / S-VLAN / C-VLAN

- **ID** indicates the VLAN ID of the received traffic flow.
- **Priority** indicates the VLAN Priority of the received traffic flow.

Note: *The TPID indicating the Tag Protocol Identifier of the received traffic flow is reported in the test report.*

➤ Statistics

- **Frame Count** indicates for each traffic flow, the number of frames matching the selected scan criteria.

Total indicates the total number of frames matching the selected scan criteria.

- **Rate (Mbit/s)** indicates for each traffic flow, the rate of frames matching the selected scan criteria. The rate is expressed either in **Line Utilization** or **Ethernet Bandwidth** (see *Rate Layer*).

Total indicates the total rate of frames matching the selected scan criteria.

11 Test Control

This chapter describes the test control buttons available on the right navigation bar of the application.

Button	For more information, see:
Discover Remote	Discover Remote Button <i>on page 572</i>
Headset DTMF	Headset/DTMF Button <i>on page 575</i>
Inject	Inject Button <i>on page 576</i>
Laser	Laser Button <i>on page 576</i>
Lpbk Tool	Lpbk Tool Button (Loopback Tool) <i>on page 577</i>
Phone Book	Phone Book Button <i>on page 584</i>
Report	Report Button <i>on page 588</i>
Reset	Reset Button <i>on page 593</i>
Save/Load	Save/Load Button <i>on page 594</i>
Start/Stop TX	Start/Stop TX Button <i>on page 598</i>

Discover Remote Button

The Discover Remote function allows to perform Ethernet tests in conjunction with a second test set (module) by scanning and connecting to any available EXFO Datacom remote module. The remote module is used to loop back the traffic via Smart Loopback or **Dual Test Set (DTS)** for simultaneous bidirectional RFC 2544, RFC 6349, or EtherSAM results.

Note: Only available with *EtherSAM*, *EtherBERT*, *RFC 2544*, *RFC 6349*, and *Traffic Gen & Mon* test applications.

Remote Modules Discovery

- **Target** defines how to perform the scan to discover remote modules.
 - **Subnet** indicates to perform the scan based on the current subnet.
 - **Specific IP** indicates to perform the scan for a specific remote module IP address. Enter the IP address of the target module.

Quick Ping tests if the destination IP address can be reached. A message displays if the ping attempt is **Successful** or **Failed**.

- **Scan** button scans the subnet or a specific IP (see **Target**) to discover remote EXFO compatible module(s).

The discovered modules are listed in the table with their **IP Address**, **Remote ID**, **Capabilities**, and **Status** information. **Remote ID**, **Capabilities**, and **Status** are only available for remote MAX-800 Series, FTB-700G/800 Series, FTB-800v2 Series, and 88000 Series modules.

- **Capabilities** indicates the loopback capabilities of the remote module using the following test application icons:
Smart Loopback, RFC 2544, RFC 6349, and/or EtherSAM.

- **Status** indicates the status of the remote module.

Status	Description
Idle -<test application> ^a	The specified test application is selected but not running.
Busy -<test application> ^b	The specified test application is running.
Not Responding	No response from the specified IP address (only possible when Target is set to Specific IP).

- Possible test applications: EtherSAM, RFC 2544, RFC 6349, EtherBERT, Traffic Gen & Mon, Smart Loopback, Through Mode, TCP Throughput, Carrier Ethernet OAM, Cable Test, 1588 PTP, or SyncE.
- Possible test applications: EtherSAM, RFC 2544, RFC 6349, EtherBERT, Traffic Gen & Mon, Smart Loopback, TCP Throughput, Carrier Ethernet OAM, 1588 PTP, or SyncE.

- **Loop Up** and **Loop Down** buttons (Not available with RFC 6349 test application)

- **Loop Up** establishes the connection with the selected remote module and sets the remote module into **Smart Loopback** test application.

If a remote module is in any busy status a user confirmation is required to proceed with the Loop Up command.

Following a successful loop up, the IP address of the remote module will be used as the destination IP address for the test.

Once the connection is established with the remote module, the local module can be set for EtherSAM, RFC 2544, EtherBERT, or Traffic Gen & Mon testing.

- **Loop Down** ends the connection between the local and the remote modules.

Test Control

Discover Remote Button

- **Connect** and **Disconnect** buttons are only available with RFC 2544, RFC 6349, and EtherSAM test applications.
- **Connect** establishes the connection with the selected remote module and sets the remote module into either DTS RFC 2544, DTS RFC 6349, or DTS EtherSAM test application, depending on the active test on the local module.

If a remote module is in any busy status a user confirmation is required to proceed with the Loop Up command.

Following a successful connection, the IP address of the remote module will be used as the destination IP address for the test.

- **Disconnect** ends the connection between the local and the remote modules.

Local Module Identification

Module ID is used to easily identify this module in case another NetBlazer V2 Series is performing a discovery scan. Up to 16 alpha-numeric characters are allowed.

Headset/DTMF Button

Note: Only available with **ISDN PRI** test application.

The **Headset/DTMF** allows to connect a B-Channel to the headset and DTMF tones can be generated using the keyboard.

Channel

Allows to select the channel used to connect the Headset and DTMF; default is channel **1**.

Headset

Note: The settings here and on the platform are independent but platform settings may limit level control. For more information, refer to *Adjusting Microphone and Speaker Volume from the platform user guide*.

- **Speaker Volume:** The slide bar and +/- buttons are used to increase or decrease the volume of the speaker.
- **MIC Volume:** The slide bar and +/- buttons are used to increase or decrease the volume of the microphone.

DTMF



The DTMF phone-style button grid is used to enter the standard DTMF tone (0-9, *, #). Alternatively the hard keyboard of the platform can be used.

Inject Button

Injects alarms/errors based on settings from the *Inject Button* on page 368.

Laser Button

The **Laser** button enables or disables the laser for optical interfaces. For **Dual Port** topology, enables or disables the laser for both optical interfaces (ports). However, when an active copper SFP is used on a port, the laser is always on for this port.

Laser Button	Border Color	Description
	Black	Laser is off.
	Red	Laser is on.

Note: *For SFP+ power level 2, a delay of up to 90 seconds may be required before generating/transmitting (TX) the laser signal as defined in the Specifications for Enhanced Small Form Factor Pluggable Module (SFF-8431).*

Lpbk Tool Button (Loopback Tool)

The Loopback Tool provides the capability of looping back the Ethernet frames/packets that are received on the loopback tool port.

Pressing the **Lpbk Tool** button opens the Loopback Tool pop-up and powers up the port unused by the main test application (it does not start looping back the frames yet). The Loopback Tool starts looping back the Ethernet frames/packets that are received when pressing on the **Loopback** button from the **Loopback Tool** tab.

Note: *The **Lpbk Tool** button is available when the main test application is any single port Ethernet test application with the exception of Through mode. Not available on 890 and 890NGE (100G).*

Note: *The Loopback Tool is independent from the main test **Start/Stop**, **Reset** and **Test Timer**.*

Note: *Enabling/disabling the Laser control affects both the main test application and the Loopback Tool when applicable (if both test and tool are using an optical port).*

Loopback Tool tab

The **Loopback Tool** tab allows the configuration of the loopback parameters and displays the traffic statistics as well as the S-OAM Responder statistics.

Press the **Lpbk Tool** button and select the **Loopback Tool** tab.

- **Status:** The status field displays the current status of the Loopback test.
 - **-- (Idle):** Loopback Tool is not looping back frames and results are not available.
 - **In Progress:** Loopback Tool is looping back frames.
 - **Completed:** Loopback Tool is not looping back frames but results are available. The test **Status** indicates **Completed** when the loopback tool has been stopped.
- **Start Time:** The time when the Loopback Tool was started.
- **Transparent (Pseudo-Physical)** check box when selected (cleared by default), determines that the Loopback tool operates as a physical loopback by transmitting all received frames unaltered and without discrimination.

In transparent mode, the Network tab and the S-OAM Responder statistics are not available.

Note: *The **Transparent** mode is intended to be used for point-to-point topology, not for switched or routed networks. Use the **Transparent** mode with caution because all received frames are looped back without discrimination.*

- **Loopback Mode** determines at which layer the address/port swapping is limited.
 - **Ethernet** swaps the MAC addresses of received packets having their **Destination MAC** address matching the MAC address of the loopback port.
 - **Ethernet (All Unicast)** swaps the MAC addresses of received packets having Unicast **Destination MAC** address.
 - **IP**, for Ethernet Layer 3 and 4, swaps the MAC and IP addresses of received packets having their **Destination IP** address matching the IP address of the loopback port. For Ethernet Layer 2, swaps the **MAC addresses** for packets having their **Destination MAC** address matching the MAC address of the loopback port.
 - **UDP/TCP** (default), for Ethernet Layer 4, swaps the UDP or TCP ports and the MAC and IP addresses of received packets having their **Destination IP** address matching the IP address of the loopback port. For Ethernet Layer 3, swaps the MAC and IP addresses for packets having their **Destination IP** address matching the IP address of the loopback port. For Ethernet Layer 2, swaps the **MAC addresses** for packets having their **Destination MAC** address matching the MAC address of the loopback port.
- **Traffic**
 - **Line Utilization (%)** indicates the current percentage of the transmitting/receiving line rate utilization.
 - **Ethernet BW (Mbit/s)** indicates the current transmitting/receiving data rate expressed in Mbit/s.
 - **Frame Rate (frame/s)** indicates the current transmitted/received number of frames (including bad frames, Broadcast frames and Multicast frames) in frame per second.
 - **Frame Count** indicates the total number of transmitted/received valid and invalid frames.

Test Control

Lpbk Tool Button (Loopback Tool)

- **S-OAM Responder** check box when selected (default) allows to respond to LBM, LTM, DMM, LMM, and SLM valid messages (**Lpbk Tool** must be started, see **Loopback** button below). Traffic statistics are also monitored (refer to *Responder* on page 484).

Responds to... message	Responds with... message
LBM	LBR
LTM	LTR
DMM	DMR
LMM	LMR
SLM	SLR

Responder - TX Count reports respectively the count of LBR, LTR, DMR, LMR, SLR, and the total of frames transmitted.

Responder - RX Count reports counts of valid LBM, LTM, DMM, LMM, SLM, and the total of frames received. A valid messages must have its destination MAC address matching either the unit port Unicast MAC address or a Multicast class 1 address¹.

- **Loopback** button starts/stops looping back the frames/packets that are received. The default value is disabled.

1. Refer to *Unicast/Multicast Addresses for Ethernet OAM* on page 678 for more information.

Interface Tab

➤ Physical Interface

- **Interface/Rate** allows the selection of the loopback tool interface rate: **10/100/1000M Electrical** (default), **100M Optical**, **1GE Optical**, or **10GE LAN**.
- **Connector** displays the NetBlazer V2 Series's port for the selected interface/rate.

Interface/Rate	Connector	
	When using Port 1	When using Port 2
10GE LAN 1GE Optical 100M Optical	Port 1 - SFP+	Port 2 - SFP+
10/100/1000M Electrical	Port 1 - RJ45	Port 2 - SFP+ (RJ45) ^a

- a. Ethernet 10/100/1000M electrical is supported when using an active copper SFP.

➤ Clock Mode: Displays the clock mode

Internal: Internal clock of the unit (STRATUM 3).

Recovered: Line clock from the input port signal involved in the tool.

- **RX Power (dBm)** indicates the current received power level of the optical laser in dBm.

Green: Power level in range.

Yellow: Power level out-of-range.

Red: Loss of signal or power level is close to damage.

Gray: Invalid operational range value or not supported by the optical transceiver.

Test Control

Lpbk Tool Button (Loopback Tool)

- **Power Range (dBm)** indicates, when supported, the received power level range of the optical laser in dBm.
- **RX Frequency (MHz/GHz)** indicates the frequency of the input signal. When no frequency reading is possible, "--" is displayed. Not available when using an active copper SFP.
- **LINK**
 - **Auto-Negotiation** check box when selected, enables the link auto-negotiation and allows to set the port **Speed**, **Duplex**, **Flow Control**, and **Local Clock** parameters. Those settings are not applied immediately to the port, they are used only when the negotiation process is started and take effect only when the auto-negotiation succeeds. However current settings are applied immediately to the port when the **Auto-Negotiation** check box is cleared. The **Auto-Negotiation** check box is automatically selected for 1GE Electrical interface and is not configurable. Available with **10/100/1000M Electrical** interface.
 - **Speed**, available with **10/100/1000M Electrical** interface, allows the selection of the interface rate: **10M**, **100M**, **1GE**, or **Auto**¹. The negotiated speed will be displayed next to the **Speed** field selection.
 - **Duplex** choices for **10M** and **100M** electrical interfaces are **Full Duplex** (default), **Half Duplex**, and **Auto**¹. For other rates the Duplex is set to **Full Duplex**. The negotiated duplex will be displayed next to the **Duplex** field selection.
 - **Flow Control** choices are **TX**, **RX**, **RX and TX**, **None** (default), and **Auto**¹. When the **Flow Control** is set to **None**, pause frames received are ignored.

1. **Auto** is only available when the **Auto-Negotiation** check box is selected.

- **Cable Mode** is available with **10/100/1000M Electrical** interface.

Manual mode is selected when the **Auto-Negotiation** check box is cleared and allows to select the type of cable: **MDI** (default) for straight through cable or **MDIX** for crossover cable.

Automatic mode is selected when the **Auto-Negotiation** check box is selected and allows to automatically detect the MDI or MDIX cable type.

- **Local Clock** is only available with 1GE electrical interface and allows to set the provenance of the clock: **Master** (default), or **Slave**, or **Auto**¹.

Network tab

Refer to *Network* on page 198 for more information.

SFP/SFP+ tab

Refer to *CFP4/QSFP/SFP+* on page 131 for more information.

1. **Auto** is only available when the **Auto-Negotiation** check box is selected.

Phone Book Button

Note: Only available with *ISDN PRI* test application.

The **Phone Book** is used to configure, save, load, import, and export phone numbers and phone books.

Configure tab

The **Configure** tab allows to save a phone number and associate a name to it.

To save an entry to the Phone Book:

1. From the **Configure** tab, tap the **Create New Entry** button.
2. Enter a name associated to the phone number in the **Name** field. A maximum of 20 characters is allowed.
3. Enter the phone number in the **Number** field. A maximum of 30 digits is permitted.

A phone book can contain up to 100 entries. The list of phones is presented in alphabetical order.

To delete an entry from the Phone Book:

1. Select the check box of each entry to be deleted. Alternatively, tap the **(Un)Select All** button to select or un-select all entries in a phone book.
2. Tap the **Delete** button.
3. Tap **Yes** to confirm.

To edit an entry in the Phone Book:

1. Highlight the entry to be edited.
2. Enter the new name and/or phone number.

Save/Load tab

The save function stores the phone book.

To save a phone book:

1. From the **Save/Load** tab, select the media where the file will be saved: **Internal Storage**¹ or **Removable Drives** (USB media for example) if present.
2. Tap on the **Save** button.
3. Type the name of the phone book file to be saved.
4. Tap **OK**.

The load function opens a previously saved phone book.

To load a phone book:

1. From the **Save/Load** tab, select the media from where the file is located: **Internal Storage**¹ or **Removable Drives** (USB media for example) if present.
2. Select the file from the list.
3. Tap the **Load** button.
4. Tap **OK**.

1. **Internal Storage** specifies that the file is saved in Documents\810-880-NetBlazer\PhoneBook.

Test Control

Phone Book Button

To rename a phone book file:

1. From the **Save/Load** tab, select the media from where the file is located: **Internal Storage**¹ or **Removable Drives** (USB media for example) if present.
2. Select the file from the list.
3. Tap the **Rename** button.
4. Change the name of the phone book file.
5. Tap **OK**.

To delete a phone book file:

1. From the **Save/Load** tab, select the media from where the file is located: **Internal Storage**¹ or **Removable Drives** (USB media for example) if present.
2. Select the file from the list.
3. Tap the **Delete** button.
4. Tap **Yes** to confirm the deletion.

Import/Export tab

The import/export function allows to copy multiple files from a **Removable Drives to Internal Storage** (Import) or from **Internal Storage to Removable Drives** (Export).

To import/export phone book file(s):

1. From the **Import/Export** tab, select the media from where the files are located: **Internal Storage**¹ or **Removable Drives** (USB media for example) if present.
2. Select the check box of each phone book file to be imported/exported. Alternatively, tap the **(Un)Select All** button to select or un-select all phone book files.
3. Select the destination where the file will be copied (**Copy To**).
4. Tap the **Copy** button.
5. Tap **Yes**.

To delete phone book file(s):

1. From the **Import/Export** tab, select the media from where the files are located: **Internal Storage**¹ or **Removable Drives** (USB media for example) if present.
2. Select the check box of each phone book file to be deleted. alternatively, tap the **(Un)Select All** button to select or un-select all phone book files.
3. Tap the **Delete** button.
4. Tap **Yes** to confirm.

1. **Internal Storage** specifies that the file is saved in Documents\810-880-NetBlazer\PhoneBook.

Report Button

The report contains all information about the current test including its setup and results.

Note: *Nothing prevents the configuration and alarm/error injection setup while the test has been stopped; thus, the report should be saved/printed before changing any test parameters to avoid printing discrepancy between the configuration and results.*

The **Report** button is available when the test is running or stopped, but the report generation is only possible when the test is stopped. It is possible to save, open, import, export, and delete test report(s).

File Location

- **Public Documents:**
Users\Public\Documents\810-880-NetBlazer\Reports
- **My Documents:**
Users\<User>\Documents\810-880-NetBlazer\Reports
- **Others**, use **Browse** to select a specific file location that will be displayed under **Others**.
- **Removable Drives** is only available when there is a removable disk/key connected to the FTB-1v2 Pro USB port.

Config/Save Tab

The **Config/Save** tab allows to configure the report parameters and generate/save the report.

Tap the **Report** button and the **Config/Save** tab.

- **Job Information** parameters are used to identify the source of the report and are not mandatory. Enter the following job information if required: **Job ID**, **Contractor Name**, **Customer Name**, **Operator Name**, **Circuit ID**, and **Comment**. Up to 30 characters are allowed for each parameter at the exception of **Comment** for which 256 characters are allowed.

Restore Default reverts all **Job Information** parameters back to the default values.

- **Report Headlines and Content** parameters are used to identify the report and are not mandatory. Up to 30 characters are allowed for each parameter.
 - **Report Header** could be the company name.
 - **Report Title** could be the name of the product, name of test, test number, etc.
 - **Optional Content** allows to choose the optional content that can be part of the report:
 - All** (default) includes all optional content to the report.
 - None** excluded all optional content from the report.
 - Custom** allows to select the optional content to be part of the report.
 - **Choose Content**, available when the **Optional Content** is set to **Custom**, allows to select what will be part of the custom content.

➤ Save Report

- **Auto-Generate File Name** check box, when selected (default), automatically generates the report file name which contains the name of the test, the date (YY.MM.DD), and time (HH.MM.SS). Clear the **Auto-Generate File Name** check box to enter a specific file name.

File Name is the name of the report to be generated.

- **Save To** is the file location where the report file will be saved (see *File Location* on page 588).
- **Display Report after Saving** check box when selected (default) automatically displays the report once it is generated.

Note: *Once generated, the report can be opened from the Open Tab on page 591.*

- **Turn on Report Generation Prompt** check box when selected (default) displays a pop-up every time a test case is stopped or completed to ask if a report generation is desired.
- **Format** is the file format for the report: **PDF** (default) and **Text**.
- **Logo** check box when selected (default) allows to include a logo to the report. Only available with the PDF file format. Select the logo picture that will be displayed on the report.
- To select another logo, first add a new logo by either copying the logo picture file to the following folder or by using the Import/Export (see page 592) then select the new logo from the list.

Documents\810-880-NetBlazer\Reports\Images

Supported picture file formats are jpg, gif, bmp, and png.

- **Save Report** button generates and saves the report on the selected media (**Save to**).

Open Tab

Report files can be opened from this page.

Tap the **Report** button and the **Open** tab.

To open a saved report:

- 1.** Select the file location (see *File Location* on page 588).
- 2.** Select the report file from the list.
- 3.** Tap the **Open** button.

Import/Export Tab

Allows to transfer and delete report files from an external USB media. Also allows to import images that can be used as the Logo for reports.

Tap the **Report** button and select the **Import/Export** tab.

To import/export a report or image:

1. Select either **Report** or **Image** as **File Type**.
2. Select the file location (see *File Location* on page 588).
3. From the **Copy To** drop list, select where the file(s) will be copied.
4. Select the file(s) to be copied by selecting its corresponding check box or tap the **(Un)Select All** button to select or unselect all files in the list.
5. Tap the **Copy** button.
6. A confirmation is displayed, tap **OK**.

To delete a report or image:

1. Select either **Report** or **Image** as **File Type**.
2. Select the file location (see *File Location* on page 588).
3. Select the file(s) to be deleted by selecting its corresponding check box or tap the **(Un)Select All** button to select or unselect all files.
4. Tap the **Delete** button.
5. Tap **YES** to confirm the deletion.

Reset Button

Tap the **Reset** button to clear results, statistics, and logger content. The **Reset** button is only available when the test is running.

Note: *The **Reset** button is not available for EtherSAM, RFC 2544, RFC 6349, Cable Test, and Smart Loopback test applications.*

Save/Load Button

The **Save/Load** button allows to save, load, import, export, and delete configuration file(s).

Note: *Save/Load is only possible when the test is stopped.*

File location

- **My Documents** offers two file locations: use **Favorites** for most commonly used configuration files or **Configurations** for others.

Users\<User>\Documents\810-880-NetBlazer\Configuration

Users\<User>\Documents\810-880-NetBlazer\Configuration\Favorites

- **Public Documents** offers two file locations: use **Favorites** for most commonly used configuration files or **Configurations** for others.

Users\Public\Documents\810-880-NetBlazer\Configuration

Users\Public\Documents\810-880-NetBlazer\Configuration\Favorites

- **Others** offers two file locations: use **Factory Defined** for factory defined configuration files or select **Browse** to create a user defined file location.

- **Removable Drives** is only available when there is a removable disk/key connected to the FTB-1v2 Pro USB port.

Save/Load Tab

Tap the **Save/Load** button and the **Save/Load** tab.

The save function stores the configuration of the NetBlazer V2 Series including all test settings to a file.

To save a configuration:

1. Select the file location (see *File location* on page 594).
2. Tap on the **Save** button.
3. Type the name of the configuration file to be saved and a description (**Config Summary**) if needed.
4. Select the **Add to Favorites** check box to save the configuration file in the **Favorites** list.
5. Tap **OK**.

The load function opens and applies the test configuration from a previously saved configuration file.

To load a configuration:

1. Select the file location (see *File location* on page 594).
2. Select the file from the list.
3. Select or clear the **Overwrite report settings** check box as required. The **Overwrite report settings** check box when selected (default) replaces the current report settings by those from the configuration that is loaded.
4. Tap the **Load** button.

Note: *Configuration file has a limited backward compatibility (Typically the backward compatibility period is one year or three software releases).*

To rename a configuration file:

1. Select the file location (see *File location* on page 594).
2. Select the file from the list.
3. Tap the **Rename** button.
4. Change the name of the configuration file.
5. Select the **Add to Favorites** check box to save the configuration file in the **Favorites** list.
6. Tap **OK**.

To delete a configuration file:

1. Select the file location (see *File location* on page 594).
2. Select the file from the list.
3. Tap the **Delete** button.
4. Tap **Yes** to confirm the deletion.

To add a configuration file to the Favorites list:

1. Select **Configuration** from either **My Documents** or **Public Documents**.
2. Select the file from the list.
3. Tap the **Add to Favorites** button. The file will be moved into the **Configurations** folder of its corresponding location (either **My Documents** or **Public Documents**).

To remove a configuration file from the Favorites list:

1. Select **Favorites** from either **My Documents** or **Public Documents**.
2. Select the file from the list.
3. Tap the **Remove from Favorites** button. The file will be moved into the **Configurations** folder of its corresponding location (either **My Documents** or **Public Documents**).

Import/Export Tab

Configuration files can be transferred to and from an external USB media as well as deleted.

Tap the **Save/Load** button and the **Import/Export** tab.

To import/export a test configuration:

1. Select the source file location (see *File location* on page 594).
2. From the **Copy To** drop list, select a destination file location.
3. Select the file(s) to be copied by selecting its corresponding check box or tap the **(Un)Select All** button to select or unselect all files in the list.
4. Tap the **Copy** button.
5. A confirmation is displayed, tap **OK**.

To delete a test configuration:

1. Select the file location (see *File location* on page 594).
2. Select the file(s) to be deleted by selecting its corresponding check box or tap the **(Un)Select All** button to select or unselect all files in the list.
3. Tap the **Delete** button.
4. Tap **YES** to confirm the deletion.

Start/Stop | TX Button

The **Start/Stop | TX** button allows to manually start or stop any test as well as to enable traffic generation (Traffic Gen & Mon).

To start the test:

Tap the **Start** button to start the test. **Start** is available when the test is not running.

To stop the test:

Tap the **Stop** button to stop the test; the traffic generation (Traffic Gen & Mon) also stops if it was enabled (TX button). **Stop** is available when the test is running.

By default, a message is displayed when the test stops asking to generate a report. To disable this feature, see *Turn on Report Generation* on page 590. Nothing prevents the configuration and alarm/error injection setup while the test has been stopped; thus, if a report is required, it should be saved before changing any test parameters to avoid discrepancy between the configuration and results. See *Report Button* on page 588 to generate and save a report file.

To enable traffic generation (available with Traffic Gen & Mon):

Tap the **TX** button to enable traffic generation for all enabled streams; the test is also started if it was not running. While the test is running the **TX** button is available to enable/disable traffic generation. Some conditions, such as ARP not resolved, link down, etc., may prevent the stream to be transmitted.

12 **Power Failure Recovery**

The automatic power failure recovery is used to select, configure, and restart¹ the test that was running before the power failure; a test that was not running will be selected and configured but not started. To provide this level of protection, the configuration of the current test is automatically saved; the logger, injections, and configuration are periodically saved.

A power failure occurs when the AC power is down while the unit's battery has not sufficient power to keep the unit running. Pressing the FTB-1v2 Pro power button for 5 seconds performs a power down reset and is also considered as a power failure condition. The Windows **Hibernate** or **Sleep** mode is also considered as a power failure condition.

When the power returns, the automatic power failure recovery restarts the FTB-1v2 Pro, the NetBlazer V2 Series, then selects, configures, and starts the test if it was running before the power failure.

Note: *If the automatic power failure recovery is not used, restarting the NetBlazer V2 Series after a power failure automatically selects, configures, and starts the test if it was running before the power failure.*

1. Not applicable for iSAM, EtherSAM, RFC 2544, TCP Throughput, and Cable Test applications; these tests must be started manually.

Enabling Power Failure Recovery

To enable the automatic power failure recovery:

1. Enable launching the application when starting the FTB-1v2 Pro (refer to the FTB-1v2 Pro user guide for more information):

From Mini ToolBox, tap on the **System Settings** button, the **Startup Applications** button, and select the NetBlazer V2 Series's check box.

2. Enable the FTB-1v2 Pro automatic power on feature (refer to the FTB-1v2 Pro user guide for more information):

2a. From Mini ToolBox, tap on the **System Settings** button, and the **Startup Applications** button.

2b. Select the **Power on the unit when AC outlet is connected or after power outage** check box.

3. Make sure that Windows does not require a user name and password. The FTB-1v2 Pro is set to require user name and password by default. To disable Windows user name and password:

3a. From Mini ToolBox, tap on the **System Settings** button and the **Automatic Logon** button.

3b. Clear the **User must enter a user name and password to use this computer** check box and enter the password to confirm.

Note: *The power failure recovery is not used when the application closes normally.*

When Using the Test Timer

Refer to *Timer* on page 297 for more information on test timer.

The test that was running will be re-created and started after a power failure if conditions described above are met in addition with the following test time conditions:

- The start time has not expired during the power failure.
- The stop time or the duration has not expired during the power failure.

13 *Maintenance*

To help ensure long, trouble-free operation:

- Always inspect fiber-optic connectors before using them and clean them if necessary.
- Keep the unit free of dust.
- Clean the unit casing and front panel with a cloth slightly dampened with water.
- Store unit at room temperature in a clean and dry area. Keep the unit out of direct sunlight.
- Avoid high humidity or significant temperature fluctuations.
- Avoid unnecessary shocks and vibrations.
- If any liquids are spilled on or into the unit, turn off the power immediately, disconnect from any external power source, remove the batteries and let the unit dry completely.



WARNING

The use of controls, adjustments and procedures, namely for operation and maintenance, other than those specified herein may result in hazardous radiation exposure or impair the protection provided by this unit.

Cleaning LC Connectors

Under normal circumstances the cleaning of the LC connector is not required. However if the connector shows signs of debris or contamination, cleaning may be required.

To clean a LC/SC/MPO-24 connector

- 1.** Use a clean dry air (CDA) or a air gun to blow out the dust or contamination.
- 2.** Re-inspect the connector.
- 3.** If the connector is still not clean, use a commercial cleaner recommended by the SFP/SFP+ manufacturer.

Note: *Refer to the transceiver manufacturer for more detailed cleaning recommendations and instructions.*

Recalibrating the Unit

EXFO manufacturing and service center calibrations are based on the ISO/IEC 17025 standard (*General Requirements for the Competence of Testing and Calibration Laboratories*). This standard states that calibration documents must not contain a calibration interval and that the user is responsible for determining the re-calibration date according to the actual use of the instrument.

The validity of specifications depends on operating conditions. For example, the calibration validity period can be longer or shorter depending on the intensity of use, environmental conditions and unit maintenance, as well as the specific requirements for your application. All of these elements must be taken into consideration when determining the appropriate calibration interval of this particular EXFO unit.

Under normal use, the recommended interval for your NetBlazer V2 Series is: 2 years.

For newly delivered units, EXFO has determined that the storage of this product for up to six months between calibration and shipment does not affect its performance (EXFO Policy PL-03).

Maintenance

Recycling and Disposal (Applies to European Union Only)

To help you with calibration follow-up, EXFO provides a special calibration label that complies with the ISO/IEC 17025 standard and indicates the unit calibration date and provides space to indicate the due date. Unless you have already established a specific calibration interval based on your own empirical data and requirements, EXFO would recommend that the next calibration date be established according to the following equation:

Next calibration date = Date of first usage (if less than six months after the calibration date) + Recommended calibration period (2 years)

To ensure that your unit conforms to the published specifications, calibration may be carried out at an EXFO service center or, depending on the product, at one of EXFO's certified service centers. Calibrations at EXFO are performed using standards traceable to national metrology institutes.

Note: *You may have purchased a FlexCare plan that covers calibrations. See the Service and Repairs section of this user documentation for more information on how to contact the service centers and to see if your plan qualifies.*

Recycling and Disposal (Applies to European Union Only)

For complete recycling/disposal information as per European Directive WEEE 2012/19/UE, visit the EXFO Web site at www.exfo.com/recycle.

14 *Troubleshooting*

Solving Common Problems

Before calling EXFO's technical support, please read the following common problems that can occur and their respective solution.

Problem	Possible Cause	Solution
Optical Laser LED is off and the connector is not generating the signal.	The Laser On option is disabled.	Ensure that the Laser button is enabled (On).
	There is a configuration mismatch between the inserted SFP and the rate selected for the test case.	Ensure that the SFP is supporting the rate used for the test case.
	The SFP is not compatible with the 700Gv2/800v2/890 Series.	Ensure to use a compatible SFP. Refer to <i>Modify Structure Button</i> on page 100 and <i>Specifications</i> on page 613.

Contacting the Technical Support Group

To obtain after-sales service or technical support for this product, contact EXFO at one of the following numbers. The Technical Support Group is available to take your calls from Monday to Friday, 8:00 a.m. to 7:00 p.m. (Eastern Time in North America).

Technical Support Group

400 Godin Avenue
Quebec (Quebec) G1M 2K2
CANADA

1 866 683-0155 (USA and Canada)
Tel.: 1 418 683-5498
Fax: 1 418 683-9224
support@exfo.com

For detailed information about technical support, and for a list of other worldwide locations, visit the EXFO Web site at www.exfo.com.

If you have comments or suggestions about this user documentation, you can send them to customer.feedback.manual@exfo.com.

To accelerate the process, please have information such as the name and the serial number (see the product identification label), as well as a description of your problem, close at hand.

Transportation

Maintain a temperature range within specifications when transporting the unit. Transportation damage can occur from improper handling. The following steps are recommended to minimize the possibility of damage:

- Pack the unit in its original packing material when shipping.
- Avoid high humidity or large temperature fluctuations.
- Keep the unit out of direct sunlight.
- Avoid unnecessary shocks and vibrations.

15 *Warranty*

General Information

EXFO Inc. (EXFO) warrants this equipment against defects in material and workmanship for a period of one year from the date of original shipment. EXFO also warrants that this equipment will meet applicable specifications under normal use.

During the warranty period, EXFO will, at its discretion, repair, replace, or issue credit for any defective product, as well as verify and adjust the product free of charge should the equipment need to be repaired or if the original calibration is erroneous. If the equipment is sent back for verification of calibration during the warranty period and found to meet all published specifications, EXFO will charge standard calibration fees.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL EXFO BE LIABLE FOR SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

Liability

EXFO shall not be liable for damages resulting from the use of the product, nor shall be responsible for any failure in the performance of other items to which the product is connected or the operation of any system of which the product may be a part.

EXFO shall not be liable for damages resulting from improper usage or unauthorized modification of the product, its accompanying accessories and software.

Warranty

Exclusions

Exclusions

EXFO reserves the right to make changes in the design or construction of any of its products at any time without incurring obligation to make any changes whatsoever on units purchased. Accessories, including but not limited to fuses, pilot lamps, batteries and universal interfaces (EUI) used with EXFO products are not covered by this warranty.

This warranty excludes failure resulting from: improper use or installation, normal wear and tear, accident, abuse, neglect, fire, water, lightning or other acts of nature, causes external to the product or other factors beyond the control of EXFO.

Certification

EXFO certifies that this equipment met its published specifications at the time of shipment from the factory.

Service and Repairs

EXFO commits to providing product service and repair for five years following the date of purchase.

To send any equipment for service or repair:

- 1.** Call one of EXFO's authorized service centers (see *EXFO Service Centers Worldwide* on page 612). Support personnel will determine if the equipment requires service, repair, or calibration.
- 2.** If equipment must be returned to EXFO or an authorized service center, support personnel will issue a Authorization (RMA) number and provide an address for return.
- 3.** If possible, back up your data before sending the unit for repair.
- 4.** Pack the equipment in its original shipping material. Be sure to include a statement or report fully detailing the defect and the conditions under which it was observed.
- 5.** Return the equipment, prepaid, to the address given to you by support personnel. Be sure to write the RMA number on the shipping slip. *EXFO will refuse and return any package that does not bear an RMA number.*

Note: *A test setup fee will apply to any returned unit that, after test, is found to meet the applicable specifications.*

After repair, the equipment will be returned with a repair report. If the equipment is not under warranty, you will be invoiced for the cost appearing on this report. EXFO will pay return-to-customer shipping costs for equipment under warranty. Shipping insurance is at your expense.

Routine recalibration is not included in any of the warranty plans. Since calibrations/verifications are not covered by the basic or extended warranties, you may elect to purchase FlexCare Calibration/Verification Packages for a definite period of time. Contact an authorized service center (see *EXFO Service Centers Worldwide* on page 612).

Warranty

EXFO Service Centers Worldwide

EXFO Service Centers Worldwide

If your product requires servicing, contact your nearest authorized service center.

EXFO Headquarters Service Center

400 Godin Avenue
Quebec (Quebec) G1M 2K2
CANADA

1 866 683-0155 (USA and Canada)
Tel.: 1 418 683-5498
Fax: 1 418 683-9224
support@exfo.com

EXFO Europe Service Center

Winchester House, School Lane
Chandlers Ford, Hampshire S053 4DG
ENGLAND

Tel.: +44 2380 246800
Fax: +44 2380 246801
support.europe@exfo.com

EXFO Telecom Equipment (Shenzhen) Ltd.

3rd Floor, Building C,
FuNing Hi-Tech Industrial Park, No. 71-3,
Xintian Avenue,
Fuyong, Bao'An District,
Shenzhen, China, 518103

Tel: +86 (755) 2955 3100
Fax: +86 (755) 2955 3101
support.asia@exfo.com

A *Specifications*



IMPORTANT

The following general specifications can change without notice. The information presented in this section is provided as a reference only. To obtain this product's most recent technical specifications, visit the EXFO Web site at www.exfo.com.



CAUTION

The operation and storage temperatures, as well as the altitude, humidity and IP rating of some modules may differ from those specified for your FTB-1v2 Pro. In this case, always ensure that you comply with the most restrictive conditions (either module or FTB-1v2 Pro).

Specifications

General Specifications

General Specifications

Specification		870v2	880v2	890	890NGE	870Q	880Q	720G v2	730G v2
Size (H x W x D)	Without platform	210 mm x 254 mm x 55 mm (8 1/4 in x 10 in x 2 3/16 in)				210 mm x 254 mm x 76 mm (8 1/4 in x 10 in x 3 in)			
	With platform	210 mm x 254 mm x 66 mm (8 1/4 in x 10 in x 2 5/8 in)				210 mm x 254 mm x 96 mm (8 1/4 in x 10 in x 3 3/4 in)			
Weight (without transceiver)	Without platform	0.85 kg (1.85 lb)	0.91 kg (2 lb)	1.45 kg (3.2 lb)	1.7 kg (3.75 lb)	1.84 kg (4.06 lb)	2.1 kg (4.65 lb)	1.6 kg (3.6 lb)	1.7 kg (3.7 lb)
	With platform and battery	2.3 kg (5.07 lb)	2.36 kg (5.2 lb)	2.9 kg (6.4 lb)	3.15 kg (6.94lb)	3.29 kg (7.25 lb)	3.55 kg (7.83 lb)	3.1 kg (6.8 lb)	3.15 kg (6.9 lb)
Temperature	Operating	0 °C to 50 °C (32 °F to 122 °F) up to 2000 m (6561 ft)		0 °C to 40 °C (32 °F to 104 °F) up to 2000 m (6561 ft)		0 °C to 50 °C (32 °F to 122 °F) up to 2000 m (6561 ft)			
	Storing	−40 °C to 70 °C (−40 °F to 158 °F)							
Relative humidity		0 % to 95 %, non-condensing							
Maximum operation altitude		5000 m (16000 ft)							
Pollution degree		3							
Measurement category		Not rated for measurement categories II, III, or IV							

B *Glossary*

Acronym List

10B_ERR	10B_Error
?	Help

A

AC	Alternating Current
ACH	Associated Channel Header
ACT	Activity
AIS	Alarm Indication Signal
AMI	Alternate Mark Inversion
APS	Automatic Protection Switching
ATM	Asynchronous Transfer Mode
AU-n	Administrative Unit-n
AUI	Attachment Unit Interface

B

B-VLAN	Backbone Virtual Local Area Network
B8ZS	Bipolar with 8 zero substitution
BB	Buffer to Buffer
BBE	Background Block Error
BBER	Background Block Error Ratio
BDI	Backward Defect Indication
BDP	Bandwidth Delay Product
BEI	Backward Error Indication
BER	Bit Error Rate
BERT	Bit Error Rate Test

Glossary

Acronym List

BIAE	Backward Incoming Alignment Error
BIP	Bit-Interleaved Parity
bit/s	Bit per second
BSD	Backward Signal Degrade
BSF	Backward Signal Fail
BTS	Base Station (Base Transceiver Station)

C

C	Current
C-DCI	Client - Defect Clear Indication
C-FDI	Client - Forward Defect Indication
C-LOS	Client - Loss Of Signal
C-RDI	Client - Remote Defect Indication
C-VLAN	Client/Customer Virtual Local Area Network
C&M	Control & Management
CAUI	100 Gbit/s Attachment Unit Interface
CAGE	Commerce And Government Entities
CBR	Constant Bit Rate
CBS	Committed Burst Size
CC	Continuity Check
CCM	Continuity Check Message
CE	Congestion Encountered
CD	Connectivity Defect
CDF	Client Data Frames
CE	European Conformity
cHEC	core Header Error Check
CID	Channel Identifier
CIR	Committed Information Rate

CLK	Clock
CMF	Client Management Frames
CORR	Correctable
COS	Class Of Service
CPRI	Common Public Radio Interface
CRC	Cyclic Redundancy Check
CRC-4	Cyclic Redundancy Check on 4 bits
CRITIC	Critical
CSF	Client Signal Fail
CSV	Comma Separated Value
CV	Code Violation
CW	Code Word

D

DA	Destination MAC Address
DAPI	Destination Access Point Identifier
DAS	Distributed Antenna Systems
dBm	Decibel - milliwatts
DCC	Data Communications Channel
DCI	Defect Clear Indication
DM	Degraded Minutes
DMM	Delay Measurement Message
DMR	Delay Measurement Reply
DS0	Digital Signal-level 0 (64 Kbit/s)
DS1	Digital Signal-level 1 (1.544 Mbit/s)
DS3	Digital Signal-level 3 (44.736 Mbit/s)
DSn	Digital Signal-level n
DST	Destination

Glossary

Acronym List

DTE	Data Terminal Equipment
DUS	Don't Use for Synchronization
DUT	Device Under Test

E

E-VLAN	Extended Virtual Local Area Network
E0	European standard for digital transmission-level 0 (64 Kbit/s).
E1	European standard for digital transmission-level 1 (2.048 Mbit/s).
E2	European standard for digital transmission-level 2 (8.448 Mbit/s).
E3	European standard for digital transmission-level 3 (34.368 Mbit/s).
E4	European standard for digital transmission-level 4 (139.264 Mbit/s).
EB	Errored Block
EBS	Excess Burst Size
EC	Error Count
ECN	Explicit Congestion Notification
ECT	ECN Capable Transport
EEC	Ethernet Equipment Clock
EFS	Error Free Second
eHEC	extension Header Error Check
EIR	Excess Information Rate
EoE	Ethernet over Ethernet
EoOTN	Ethernet over OTN
ERDI	Enhanced RDI
ES	Errored Second
ESMC	Ethernet Synchronization Message Channel
ESF	Extended Superframe
ESR	Errored Second Ratio
ETag	Extended Tag

EUI	EXFO Universal Interfaces
EXI	Extension Header Identifier
EXM	Extension Header Mismatch
EXT CLK	External Clock

F

FAS	Frame Alignment Signal
FC	Fibre Channel
FCC	Federal Communications Commission
FCS	Frame Check Sequence
FCC	Federal Communications Commission
FD	Frame Delay
FDI	Forward Defect Indication
FEC	Forward Error Correction
FLOGI	Fabric Login
FLR	Frame Loss Ratio
fps	Frame Per Second
FSD	Forward Signal Degrade
FSF	Forward Signal Fail

G

GAL	Generic Associated Channel Label
GE	Gigabit Ethernet
Gbit/s	Gigabit per second
GCC	General Communication Channel
GFP	Generic Framing Procedure
GFP-F	GFP - Framed

Glossary

Acronym List

GFP-T	GFP - Transparent
GHz	Giga Hertz
GM	Grand Master
GMP	Generic Mapping Procedure
GMP OOS	GMP Out of Synchronization
GUA	Global IPv6 Address
GUI	Graphical User Interface

H

H	History
HDB3	High Density Bipolar 3 Code
HDLC	High-level Data Link Control
HDMI	High Definition Multimedia Interface
HDTV	High Definition Television
Hi-BER	High-Bit Error Ratio
Hi-BER1027B	High-Bit Error Ratio 1027 Blocks
HP-	High Order Path -
Hz	Hertz

I

IAE	Incoming Alignment Error
IAIS	Incoming Alarm Indication Signal
ID	Identification
IEC	International Electrotechnical Commission
IEC	Incoming Error Count
IEEE	Institute of Electrical & Electronics Engineers
IFDV	Inter-Frame Delay Variation

IN	Input
IP	Internet Protocol
IPDV	Inter Packet Delay Variation
IPTV	Internet Protocol Television
IPG	Interframe Gap
IPv4	Internet Protocol version 4
IPv6	Internet Protocol version 6
IQ Data	In-Phase and Quadrature modulation data (digital baseband signal)
ISDN	Integrated Services Digital Network
ISM	In-Service Monitoring

J

JC	Justification Control
----	-----------------------

L

-L	Line
L1	CPRI Layer 1
L2	CPRI Layer 2
LAN	Local Area Network
LBM	Loopback Message
LBR	Loopback Reply
LCD	Loss of Code-Group Delineation
LCK	Locked
LED	Light-Emitting Diode
LER	Label Edge Router
lb	Pound
LBO	Line Build Out

Glossary

Acronym List

LFD	Loss of Frame Delineation
LLA	Link-Local IPv6 Address
LLC	Logical Link Control
LLM	Logical Lane Marker
LLM	Loss Measurement Message
LMR	Loss Measurement Reply
LOA	Loss Of Alignment
LOAML	Loss of Alignment Marker Lock
LOAML1027B	Loss of Alignment Marker Lock 1027 Blocks
LOBL	Loss of Block Lock
LOBL1027B	Loss of Block Lock 1027 Blocks
LOC	Loss Of Clock
LOC Lane	Loss Of Clock Lane
LOCS CSF	Loss of Client Signal - Client Signal Fail
LOCCS CSF	Loss of Client Character Synchronization - Client Signal Fail
LOF	Loss Of Frame
LOL	Loss of Lane Alignment
LOM	Loss Of Multiframe
LOPPS-L	Loss Of Pulse Per Second - Local
LOPPS-R	Loss Of Pulse Per Second - Remote
LOP	Loss Of Pointer
LOR	Loss Of Recovery
LOS	Loss Of Signal
LSB	Least-Significant Bit
LSP	Label Switch Path
LSR	Label Switching Router
LSS	Loss of Sequence Synchronization
LTC	Loss of Tandem Connection

LTM	Link Trace Message
LTR	Link Trace Reply

M

m	Minute
m	Meter
mA	milliampere
MA	Maintenance Association
MAC	Media Access Control
MAID	Maintenance Association Identification
Mbit/s	Megabit per second
MD	Maintenance Domain
MDI	Media Dependant Interface (straight through Ethernet cable)
MDIO	Management Data Input/Output
MDIX	Media Dependant Interface Crossover (crossover Ethernet cable)
ME	Maintenance Entity
MEG	ME Group
MEG ID	MEG Identification
MEP	MEG End Point
MFAS	Multiframe Alignment Signal
MHz	Megahertz
MNO	Mobile Network Operator
MIP	MEG Intermediate Point
MPD	Mean Path Delay
MPLS	Multiprotocol Label Switching
MS	Multiplex Section
MSA	Multisource Agreement
MSB	Most-Significant Bit

Glossary

Acronym List

MSEQV	Marker Sequence Violation
msg/s	Message per second
MSIM	Multiplex Structure Identifier Mismatch
MTU	Maximum Transfer Unit

N

NAT	Network Address Translation
NATO	North Atlantic Treaty Organization
nAUI	CAUI or XLAUI
NDF	New Data Flag
NE	Network Element
NID	Network Interface Device
NJO	Negative Justification Opportunity
nm	Nanometer

O

OAM	Operation, Administration, and Maintenance
OBSAI	Open Base Station Architecture Initiative
OC-	Optical Carrier-
OCI	Open Connection Indication
ODI	Outgoing Defect Indication
ODU	Optical Data Unit
OEI	Outgoing Error Indication
OH	Overhead
OLA	Out-of-Lane-Alignment
OOF	Out-Of-Frame
OOM	Out-Of-Multiframe

OOR	Out-Of-Recovery
OOS	Generic Mapping Procedure Out Of Synchronization
OOS	Out-Of-Sequence
OOSM	Out-Of-Service Monitoring
OPU	Optical Payload Unit
ORI	Open Radio equipment Interface
OTL	Optical channel Transport Lane
OTN	Optical Transport Network
OTU	Optical Transport Unit
OUI	Organizationally Unique Identifier
OUT	OUTput

P

-P	Path
PBB-TE	Provider Backbone Bridges with Traffic Engineering
PC	Personal Computer
PCD	Path Connectivity Defect
PCP	Priority Code Point
PCS	Physical Coding Sublayer
PD	Payload Defect
PD	Powered Device
PDI	Payload Defect Indication
PDU	Protocol Data Unit
PE	Provider Edge
pFCS	payload Frame Check Sequence
PFI	Payload Frame Check Sequence Identifier
PHY	Physical Layer Device
PLI	Payload Length Indicator

Glossary

Acronym List

PLM	Payload Label Mismatch
PLOGI	Port Login
PM	Performance Monitoring
PNO	Provisionable by the Network Operator
PoE	Power over Ethernet
POS	Position Field
POSV	Position Field Violation
PPD	Path Payload Defect
ppm or PPM	parts per million
PRBS	Pseudo Random Bit Sequence
PRS	Primary Reference Source/Clock
PRC	Primary Reference Source/Clock
PSD	Path Server Defect
PSE	Power Sourcing Equipment
PSI	Payload Structure Identifier
PTI	Payload Type Identifier
PTP	Precision Time Protocol
Ptr. Incr.	Pointer Increment
Ptr. Decr.	Pointer Decrement
PTSF	Packet Timing Signal Fail
PW	Pseudo-Wire

Q

QL	Quality Level
QoS	Quality of Service
QSFP	Quad Small Form Factor Pluggable

R

R-LOF	Remote - Loss Of Frame
R-LOS	Remote - Loss Of Signal
RAI	Remote Alarm Indication
RDI	Reverse Defect Indication
RDI	Remote Defect Indication
RE	Radio Equipment
REC	Radio Equipment Control
REI	Remote Error Indicator
RES	Reserved
RFI	Remote Failure Indication
RMA	Return Merchandise Authorization
RRH	Remote Radio Head
RS-	Regenerator Section
RTD	Round Trip Delay
RTT	Round Trip Time
RX	Receive

S

s	second
-S	Section
S-OAM	Service - OAM
S-VLAN	Service Virtual Local Area Network
SA	Source MAC Address
SAPI	Source Access Point Identifier
SB	Superblock
SD	Server Defect
SDH	Synchronous Digital Hierarchy

Glossary

Acronym List

SDI	Service Access Point Defect Indication
SDT	Service Disruption Time
SDTV	Standard Digital Television
SEF	Severely Errored Framing
SEP	Severely Errored Period
SEQV	Sequence Violation
SES	Severely Errored Second
SESR	Severely Errored Second Ratio
SF	Superframe
SFP	Small Form Factor Pluggable
SI	International System
SID	Service Instance Identifier
SLA	Service-Level Agreement
SLM	Synthetic Loss Message
SLR	Synthetic Loss Reply
SM	Section Monitoring
SMA	Sub-Miniature A Connector
SMC	SONET Minimum Clock Traceable
SNAP	Sub Network Access Point
SOF	Start Of Frame
SONET	Synchronous Transport Signal
SP	Service Provider
SPE	Synchronous Payload Envelope
SR4	Short Reach (4 Lanes)
SRC	Source
SSM	Synchronization Status Messaging
ST1	Stratum 1 Traceable
ST2	Stratum 2 Traceable

ST3	Stratum 3 Traceable
ST3E	Stratum 3E Traceable
STM	Synchronous Transport Module
STS	Synchronous Transport Signal
STU	Synchronized - Traceability Unknown
SYMB	Symbol

T

TC	Traffic Class
TCM	Tandem Connection Monitoring
TCP	Transport Control Protocol
tHEC	type Header Error Check
TIM	Trace Identifier Mismatch
TLV	Type, Length, and Value
TNC	Transit Node Clock Traceable
TOS	Type Of Service
TPID	Tag Protocol Identifier
TST	Test PDU
TTI	Trail Trace Identifier
TTL	Time To Live
TU	Tributary Unit
TUG	Tributary Unit Group
TX	Transmit

U

UAS	Unavailable Second
UE	end-User Equipment

Glossary

Acronym List

UDP	User Data Protocol
UNCORR	Uncorrectable
UNEQ	Unequipped
UPI	User Payload Identifier
UPM	User Payload Mismatch
μ s	microsecond
USA	United States of America
UTP	Unshielded Twisted Pairs

V

V	VT
V	Volt
VC	Virtual Container
VIOL	Violation
VLAN	Virtual Local Area Network
VoIP	Voice over Internet Protocol
VT	Virtual Tributary
VTG	VT Group

W

W	Watt
WAN	Wide Area Network
WIS	WAN Interface Sublayer
WWN	World Wide Name

X

XLAUI	40 Gbit/s Attachment Unit Interface
-------	-------------------------------------

10G Ethernet Client

The OTN Overclocked technology provides the capability to transparently transport 10G base-R Ethernet signals into OPU2 as specified in ITU-T. Two optical rates are provided:

- 11.0957 Gbits/s, +/- 100 ppm, designated OTU2e
- 11.0491 Gbits/s, +/- 100 ppm, designated OTU1e

The OTU2e uses the mapping scheme of CBR10G into OPU2 as defined in G.709. The client signal, 10GE LAN and the OPU fixed stuff bytes are accommodated into an OPU-like signal designated OPU2e. This signal is then wrapped in an ODU2e and then in an OTU2e signal.


The OTU1e uses the mapping scheme of CBR2G5 into OPU1 as defined in G.709. The client signal, 10GE LAN is accommodated into an OPU-like signal designated OPU1e (note that the fixed stuff bytes are not left free) this is why the 10GE signal can be transported at a lower rate than OTU2e. This signal is then wrapped in an ODU1e and then in an OTU1e signal.

The transparent transport of the 10G base-R means that the full 10G Ethernet data rate i.e. 10.3125 Gbit/s is transported over OTN. This means that the following information is transported:

- PCS 64B/66B coded information
- IPG (inter-frame filler), MAC FCS, Preamble and SFD (start of frame delimiter) and Ordered Sets (Remote Fault indication)

The OTN clocking is derived from the Ethernet client signal which is +/- 100 ppm, this is outside the clock tolerance allocated by the G.709 standard which translates in unspecified jitter performance thus limiting the application to Point to Point data path.


The following figure presents a typical network application.

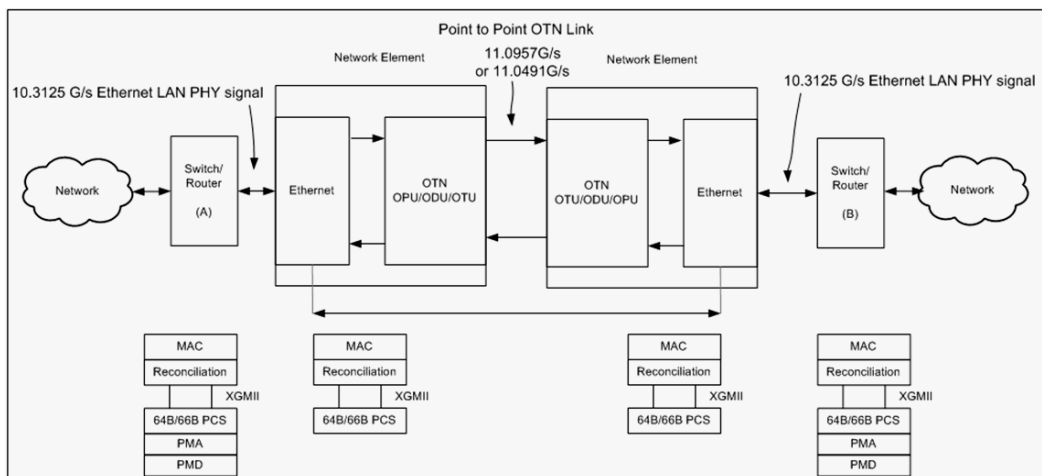

Glossary

10G Ethernet Client

The following figure presents a typical test application.

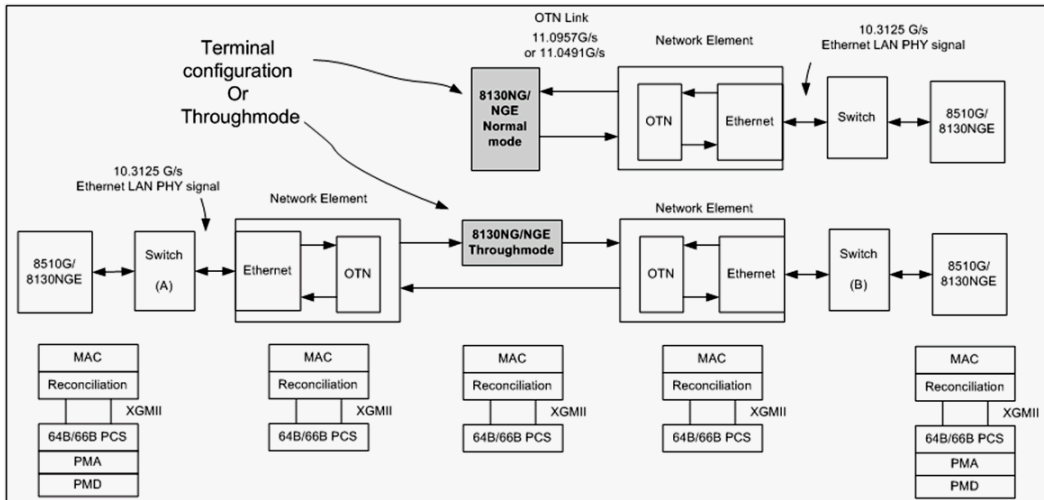

The Ethernet layer provides the equivalent functionality of the BERT Framed Layer 2 Test application supported on EXFO's Datacom product family with the particularity that there is no Ethernet Physical port as such. The Ethernet frame has its Ethertype field set to 0x88B7.


1588 PTP

The goal of the IEEE 1588 Precision Time Protocol (PTP) is to provide Network Synchronization using a packet based distribution mechanism.

Depending on the system application the Network Synchronization may require phase and frequency synchronization. 1588 PTP has the capability to deliver both by allowing a Client clock to track a Master clock in phase (time of day) and in frequency.

The protocol is based on exchange of time stamps between the Master clock and the Client clock. Two methods have been defined in the 1588 PTP standard:

- **Delay Request-Response** mechanism uses message Sync, Delay Request, Delay Response, and Follow Up (if required).

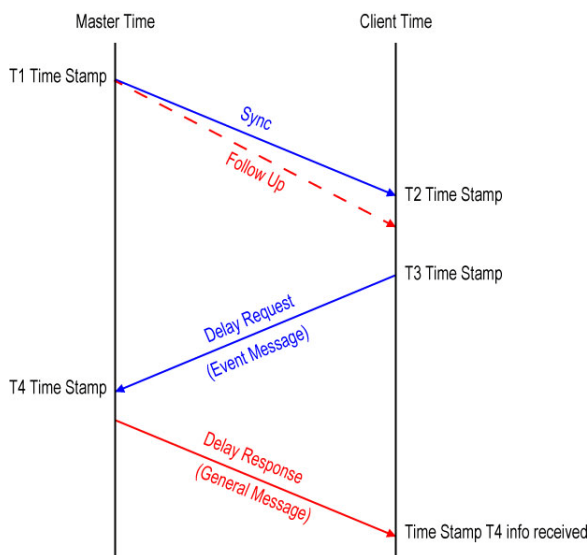

- **Peer Delay** mechanism uses message Pdelay Request, Pdelay Response, and if required Pdelay Response Follow Up. This mechanism is restricted to topologies where each peer-to-peer port communicates PTP messages with, at most, one other such port. Peer Delay is not supported by the Telecom Profile.

In order to minimize traffic on the network, PTP can operate in different modes:

- **Two-way** operation uses Sync/Follow Up, Delay Request, and Delay Response messages.
- **One-way** operation uses only the Sync/Follow Up messages. This mode of operation is used to synchronize a Client clock in frequency only. The Master clock and Client clock phases are not aligned.
- **Two-step** clock mode uses the optional Follow Up message to carry the T1 time stamp.
- **One-step** clock mode uses the Sync message to carry the T1 time stamp; no Follow Up message is transmitted by the Master clock, therefore less traffic on the network.

Client clock synchronization is achieved with a 2-part process:

- Part 1: Path delay measurement using bidirectional messages
$$\text{Mean path delay measurement (MPD)} = ((T2-T1) + (T4-T3)) / 2$$
- Part 2: Clock phase offset correction
$$\text{Offset} = (T2-T1) - \text{MPD}$$

The offset information is used by the Client clock to adjust the frequency of its oscillator in order to keep the phase offset close to zero.

The 1588 PTP supports the following Master/Client communication; however **Unicast** is used for the Telocom Profile.

- **Multicast:** A Master clock sends its Sync/Follow Up and Delay Response in a multicast mode. A Client can collect information from many Master clocks and select the Master clock that is best suited for its application.
- **Unicast:** A dedicated communication link is established between the Master and the Client clock. This mode of operation requires a negotiation which is initiated by the Client clock.

The 1588 PTP messages can be mapped on the following protocols; however UDP IPv4 is used for the Telecom Profile.

- UDP/IPv4
- UDP/IPv6
- Ethernet

1588 PTP Profiles

The purpose of a PTP profile is to allow organizations to specify particular selections of attribute values and optional features of PTP that, when using the same transport protocol, inter-work and achieve a performance that meets the requirements of a given application.

Telecom Profile G.8265.1

The Telecom Profile G.8265.1 is designed for frequency synchronization in Telecom network applications. The main attributes of this profile are:

- Unicast communication with the Grand Master
- UDP/IPv4 network layer

With the Telecom Profile, the Client Clock initiates the communication to the Master Clock by making a request for service that consists of sending Signaling messages containing a REQUEST UNICAST TRANSMISSION TLV to the IP address of the Master Clock.

If the Master Clock has sufficient capacity to handle the Client Clock request, it responds with a signaling message containing a GRANT UNICAST TRANSMISSION TLV.

The REQUEST UNICAST TRANSMISSION TLV contains several parameters:


- **messageType** is the type of service being requested: Announce, Sync, or Delay Response.
- **durationField** is the duration of the requested service: 300 seconds by default and configurable from 60 to 1000 seconds.
- **logInterMessagePeriod**: transmission rate of the requested messages.

If the Master Clock denies the request, e.g. because it has no remaining capacity, it will send back a GRANT UNICAST TRANSMISSION TLV with the durationField set to zero.

In the event of being denied service by a Master Clock, or receiving no response to the service request, a Client Clock should wait a minimum of one second before issuing a new Unicast request to that Master Clock.

As Unicast service is only granted for a limited time, the Client Clock must re-request service periodically, before the expiration of the current grant. The Client Clock should reissue the request sufficiently far in advance of the expiration to allow the request to be repeated at least twice if no grant is received. This parameter is called Unicast renewal interval.

The following diagram shows the sequence of message exchange between a Client Clock and a Master Clock. First, the Client request Unicast Announce message service. When this is granted and the first Announce message is received, the Client can check the QL value conveyed in the clockClass field of the message. From there the Client Clock can request service for Sync and Delay Request messages. Service requests are reissued at the end of the Announce duration interval to ensure continuity of service.

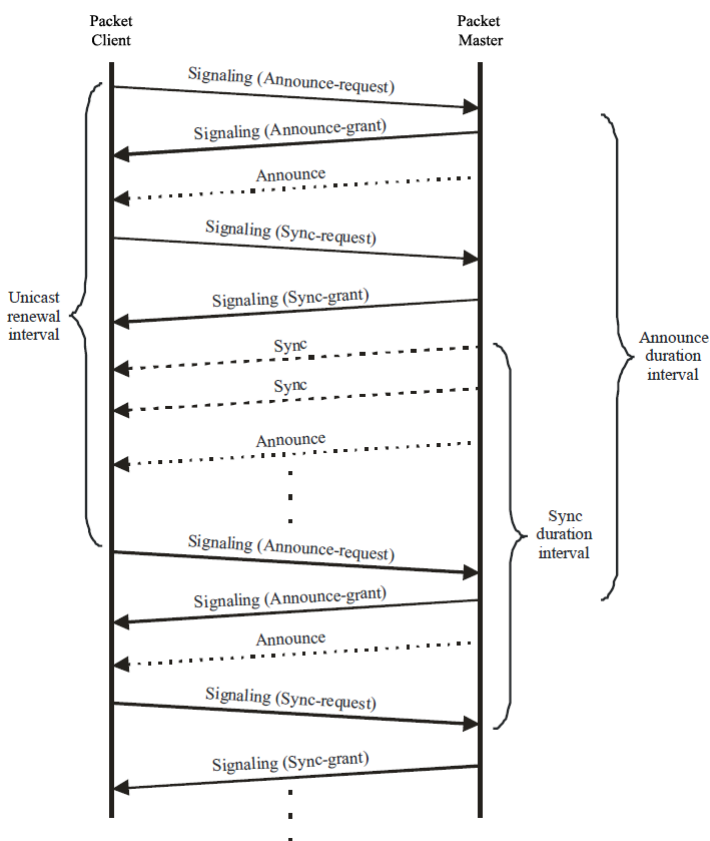

Telecom Profile G.8275.1

The Telecom Profile G.8275.1 is designed for time/phase synchronization in telecom network applications. The main attribute of this profile are:


- Full timing support from the network, i.e. all network nodes are boundary clocks
- Slave clocks synchronize with its respective upstream Boundary Clock
- 1588 messages are mapped on Ethernet Multicast

A very important distinction that has to be made compared with G.8265.1 is the mandatory use of Boundary Clocks with G.8275.1. With G.8265.1, network nodes such as Ethernet Switches or Routers were not required to be PTP aware. With G.8275.1, all network nodes needs to be PTP aware. This means that regular Ethernet Switches or Routers cannot be used. Switches/Routers are required to include the Boundary Clock functionality.

CPRI

Overview

Traditional mobile installations are bulky (use thick coaxial cables) and require a lot of power to operate (there is a huge power loss in the coaxial cabling which often requires the use of Tower Mounted Amplifiers) as outlined in the following figure.

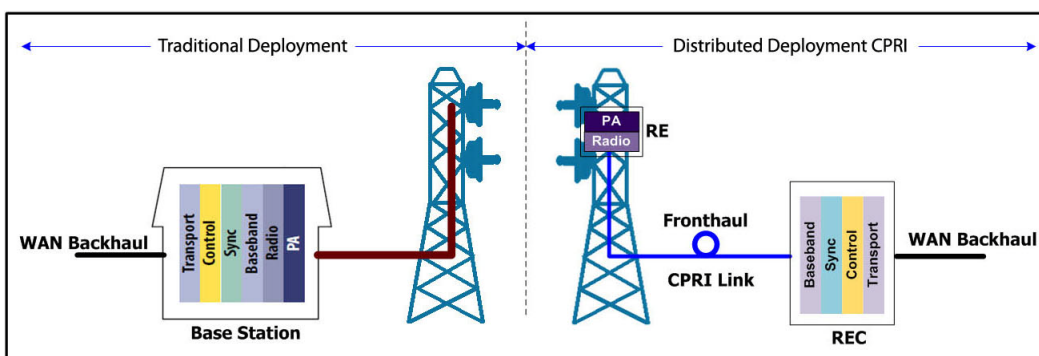

Pressures on the Mobile Network Operators (MNO) to reduce their capital, operational cost, and increase coverage are at the heart of a revolution in the mobile network. To address the situation, a concept of decomposition of the radio base station has been developed where the radio basic functions and its ability to transmit and receive radio modulated signals are separated. In such a distributed environment a protocol is required to maintain synchronization and management capabilities as well as transporting the user traffic between the simplified base station and its Remote Radio Head (RRH).


This protocol called Common Public Radio Interface (CPRI) separates a traditional radio base station configuration into two separate elements: Radio Equipment Control (REC) and the Radio Equipment (RE). The REC processes the baseband radio digital information and performs the control of the Radio Equipment. The RE converts the digital radio information into radio frequency signals transported over the air interface (antenna). The REC and RE are interconnected by a point-to-point link. This link carries the CPRI protocol and is known in the industry as the fronthaul as opposed to the backhaul that is the WAN bringing the network traffic to the base station.

The CPRI link can be extended over several kilometers as it uses fiber optics, in fact it can be deployed up to 40 km although most field installations at the moment of this writing are below 10 km.

The CPRI standard covers the physical and data link layers only. This specific focus provides additional development freedom to the various vendors to implement proprietary functions at upper layers.

Functional Description

As mentioned earlier, CPRI remotely locates the RE from the REC. This means that the RE must be controlled, managed and synchronized from the REC in addition to transporting the User information (Voice and user application data) and all that on the same digital link. As such, CPRI is composed of 3 communication flows multiplexed into a single serial signal transmitted in the same optical fiber as illustrated in the following figure.

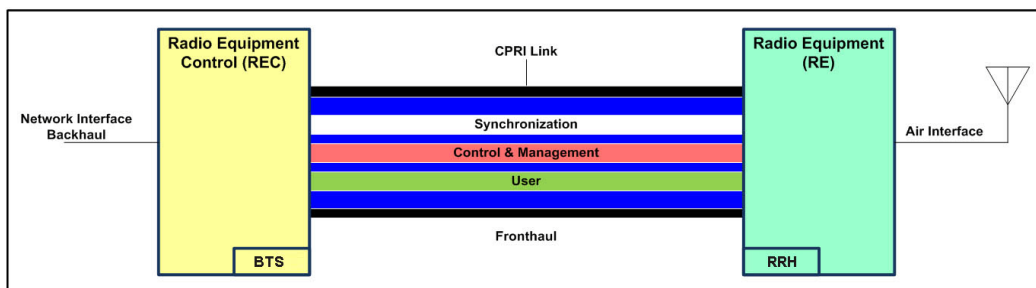


An electrical link is also available from CPRI but it is typically used for base station shelf interconnection. Since a state machine drives the link parameters (rates, protocol, and C&M channel) alignment, a BTS (defined as Master in the standard) and RRH (defined as Slave in the standard) interfaces are defined where the Master initiates the negotiation procedure necessary to achieve this alignment.

- **Synchronization:** Provides precise frequency and frame timing alignment from BTS to RRH to ensure accurate frequency and timing of the RF signal transmission and reception on the Air Interface. In essence, it provides the reference frequency for the RE.
- **Control & Management (C&M):** Management of the link between the REC and RE as well as control over radio functions such as alarms and power.
- **User:** Also known as IQ Data, represents the voice and data information that is exchanged by end-User Equipment (UE)

CPRI Model

The CPRI Model revolves around the 3 communication flows described above. CPRI defines only the Layer 1 and Layer 2 associated to these communication flows as outlined in the following figure.

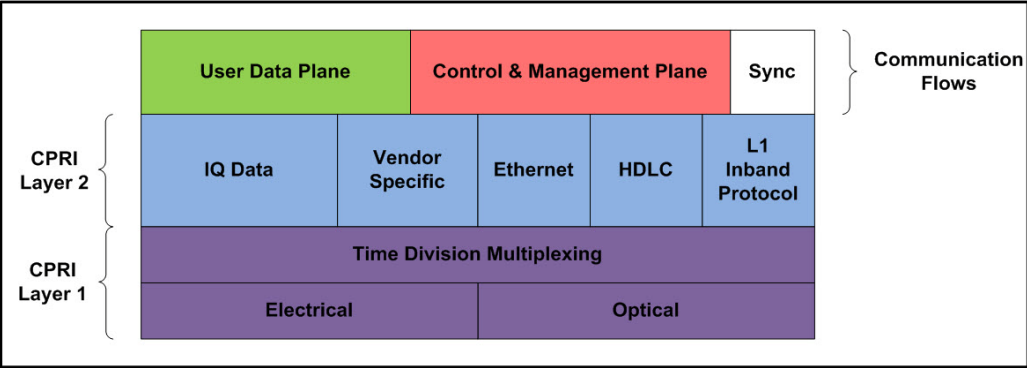

The User Data Plane contains mostly voice/data traffic in the form of IQ Data samples. IQ Data digitally encodes the change in amplitude/phase of a user device modulated signal sampled at the RE antenna.

The Control & Management Plane maintains the CPRI link itself and provides the facility to manage the operation of the RE radio functions. It is done through the L1 Inband Protocol which provides a bit oriented channel defined to support link specific alarms (R-LOS, R-LOF, ...). Also, the Ethernet/HDLC channel offer two OAM&P channel alternatives which are respectively high and low bandwidth with rates configurable based on the CPRI line interface rate. These carry proprietary information between the REC and RE. Some Vendor Specific overhead is also available.

Finally, the Synchronization flow ensures frequency stability and offers the overhead necessary for frame alignment between the REC and RE to ensure hitless channel or frequency hopping. All these flows are time division multiplexed onto one optical fiber for CPRI field deployments such as Distributed Antenna Systems (DAS).

Physical Interface

CPRI offers 8 options in terms of interface rates. Rates below 10G uses 8B/10B line coding as per CPRI V6.0 while rates above 10G use 64B/66B coding. Depending on the rates used, scrambling is optional. Depending on the CPRI signal structure (Framed or Unframed) the scrambling is either manually configured or negotiated.

Option	Rate	Line Coding	Protocol Version (Scrambling)
1	614.4 Mbit/s ^a	8B/10B	Version 1: No scrambling
2	1.2288 Gbit/s		
3	2.4576 Gbit/s		
4	3.0720 Gbit/s		
5	4.9152 Gbit/s		Version 1: No scrambling Version 2: Scrambling (Scrambling is optional)
6	6.1444 Gbit/s		
7	9.8304 Gbit/s		
8	10.1376 Gbit/s ^a	64B/66B	Version 2: Scrambling

- a. Not supported as presently not used in the field.


Ethernet Cables

Minimum Category 3 cable is required for 10Base-T connection while Category 5 cable is required for 100Base-TX and 1000Base-T connections.

Maximum cable length (between two nodes) for 10Base-T, 100Base-TX, or 1000Base-T connection is 328 feet (100 meters).


➤ Straight Through Cable (10/100 Mbit/s)

An Unshielded Twisted Pair (UTP) straight through cable is required to connect a 10Base-T/100Base-TX NetBlazer V2 Series port to a layer 1 or 2 device (ex: HUB, switch).

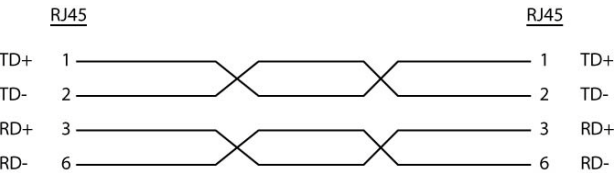


➤ Crossover Cable (10/100 Mbit/s)


An Unshielded Twisted Pair (UTP) crossover cable is required to connect the 10Base-T/100Base-TX NetBlazer V2 Series port to a layer 3 device (ex: router).

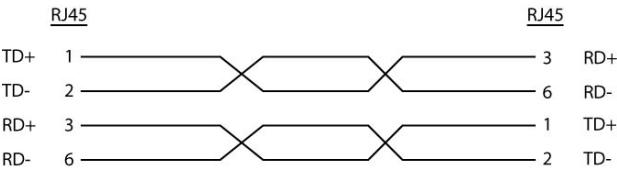

➤ **Straight Through Cable (1000 Mbit/s)**

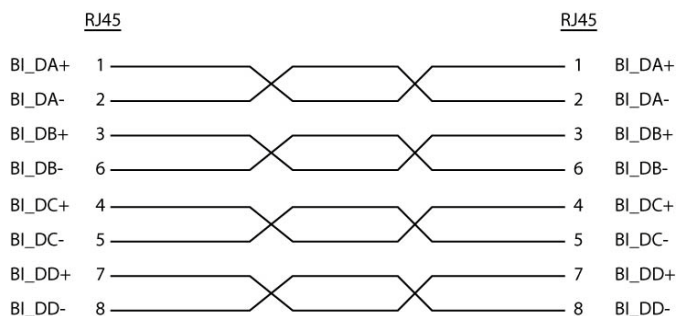

➤ **Crossover Cable (1000 Mbit/s)**

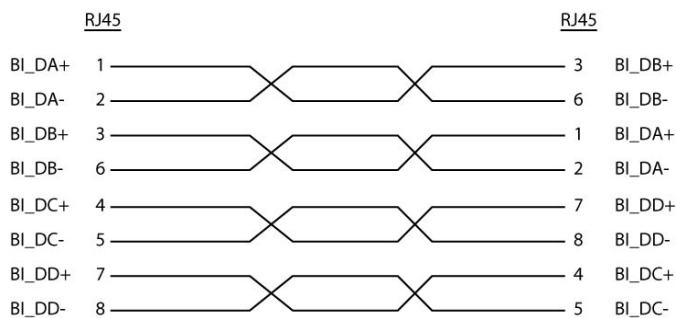

G.709 Optical Transport Network (OTN)


Overview

The optical transport network (OTN) combines the benefits of SONET/SDH technology with the bandwidth expansion capabilities offered by dense wavelength-division multiplexing (DWDM) technology.

The OTN consists of the following layers:

- Optical Transport Section (OTS)
- Optical Multiplex Section (OMS)
- Optical Channel (OCh)
- Optical channel Transport Lane (OTL)
- Optical Transport Unit (OTU)
- Optical Data Unit (ODU)
- Optical Channel Payload Unit (OPU)

Each of these layers and their functions are distributed along the network and activated when they reach their termination points, which are illustrated in the following figure.

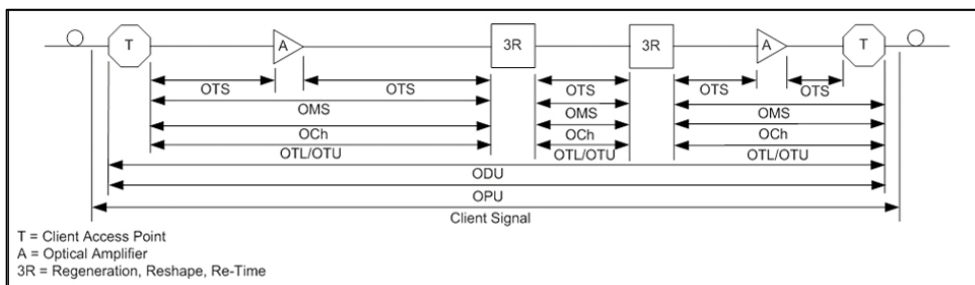

OTN Layer Termination Points

The termination of the OTS, OMS and OCh layers is performed at the optical level of the OTN. It is at the termination of the OTU layer that further functionality can be added. This layer is the digital layer—also known as the “digital wrapper”—and offers specific overhead to manage the OTN’s digital functions. The OTU also introduces a new dimension to optical networking by adding forward error correction (FEC) to the network elements, allowing operators to limit the number of required regenerators used in the network which, in turn, lowers its cost.

FEC allows an increase in the optical link budget by providing a new method to correct errors, thereby reducing the impact of network noise and other optical phenomena experienced by the client signal traveling through the network.

The OTU also encapsulates two additional layers—the ODU and the OPU—which provide access to the payload (SONET, SDH, etc.). These layers are normally terminated at the same location.

The OTU, ODU (including the ODU tandem connection) and OPU layers can all be analyzed and monitored. As per ITU G.709, current test solutions offer these possibilities using the following line rates:

- OTU1 ($255/238 \times 2.488\,320\text{ Gbit/s} \approx 2.666057143\text{ Gbit/s}$) also referred to as 2.7 Gbit/s
- OTU2 ($255/237 \times 9.953280\text{ Gbit/s} \approx 10.709225316\text{ Gbit/s}$) also referred to as 10.7 Gbit/s
- OTU3 ($255/236 \times 39.813120\text{ Gbit/s} \approx 43.018413559\text{ Gbit/s}$) also referred to as 43 Gbit/s
- OTU4 ($255/227 \times 99.532\,800\text{ Gbit/s} \approx 111.809973568\text{ Gbit/s}$) also referred to as 112 Gbit/s.

The following non standard rates are also defined:

- OTU1e ($255/238 \times 10.3125\text{ Gbit/s} \approx 11.0491071429\text{ Gbit/s}$)
- OTU2e ($255/237 \times 10.3125\text{ Gbit/s} \approx 11.0957278481\text{ Gbit/s}$)
- OTU3e1 ($255/236 \times 4 \times 10.3125\text{ Gbit/s} \approx 44.570974576\text{ Gbit/s}$)
- OTU3e2 ($243/217 \times 16 \times 2.488320\text{ Gbit/s} \approx 44.583355576\text{ Gbit/s}$)


The following non standard rates are not covered by the ITU standard but they are the equivalent function associated to Fiber Channel rates:

- OTU1f ($255/238 \times 10.51875\text{ Gbit/s} \approx 11.2700892857143\text{ Gbit/s}$)
- OTU2f ($255/237 \times 10.51875\text{ Gbit/s} \approx 11.3176424050633\text{ Gbit/s}$)

Each line rate is adapted to service different client signals:

- OC-48/STM-16 is transported via OTU1
- OC-192/STM-64 is transported via OTU2
- OC-768/STM-256 is transported via OTU3
- Null Client (All 0s) is transported via OTU_k ($k = 1, 2, 1e, 2e, 1f, 2f, 3, 3e1, 3e2, 4$)
- PRBS31 is transported via OTU_k ($k = 1, 2, 1e, 2e, 1f, 2f, 3, 3e1, 3e2, 4$)

In order to map client signals via ITU G.709, they are encapsulated using the structure illustrated in the following figure.

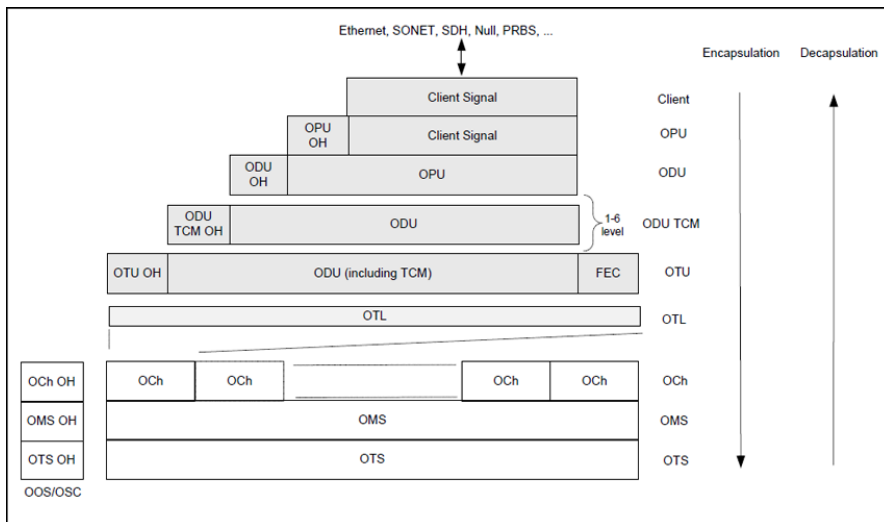

Basic OTN Transport Structure

Glossary

G.709 Optical Transport Network (OTN)

As depicted above, to create an OTU frame, a client signal rate is first adapted at the OPU layer. The adaptation consists of adjusting the client signal rate to the OPU rate. Its overhead contains information to support the adaptation of the client signal. Once adapted, the OPU is mapped into the ODU. The ODU maps the OPU and adds the overhead necessary to ensure end-to-end supervision and tandem connection monitoring (up to six levels). Finally, the ODU is mapped into an OTU, which provides framing as well as section monitoring and FEC.


Following the OTN structure presented in figure *Basic OTN Transport Structure* on page 651, OTUks ($k = 1, 2, 3$) are transported using the OCh; each unit is assigned a specific wavelength of the ITU grid. Several channels can be mapped into the OMS and then transported via the OTS layer. The OCh, OMS and OTS layers each have their own overhead for management purposes at the optical level. The overhead of these optical layers is transported outside of the ITU grid in an out-of-band channel called the optical supervisory channel (OSC).

When the OTU frame structure is complete (OPU, ODU and OTU), ITU G.709 provides OAM&P functions that are supported by the overhead.

OTU Frame Structure and Overhead

As shown in the figure below, the OTU frame is broken down into the following components:

- Framing
- OTL, OTU, ODU, OPU overhead
- OTU FEC

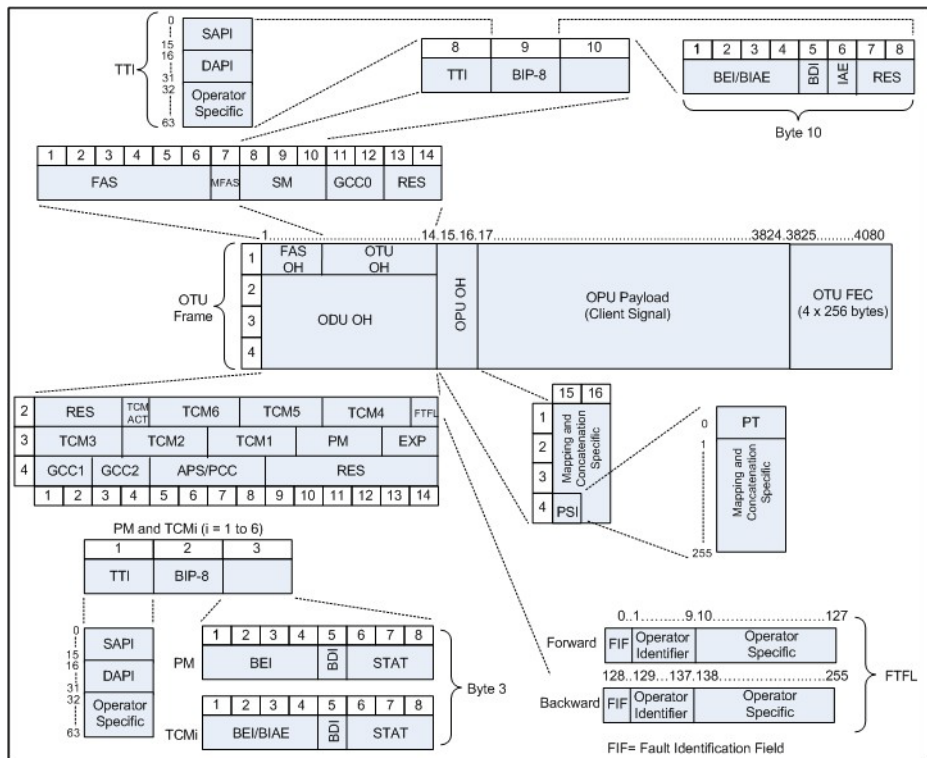

OTU Frame Description

➤ Framing

The OTU framing is divided into two portions: FAS and MFAS.

The frame alignment signal (FAS) uses the first six bytes and, similarly to SONET/SDH, it is used to provide framing for the entire signal. In order to provide enough 1/0 transitions for synchronization, scrambling is used over the entire OTU frame, except for the FAS bytes.

The multiframe alignment signal (MFAS) byte is used to extend command and management functions over several frames. The MFAS counts from 0 to 255, providing a 256 multiframe structure.

➤ Overhead

Each portion of the OTU frame has its own specific overhead functions. They are displayed in figure *OTU Frame Description* on page 653, and are briefly described below. Further details can be found about these overhead fields in the ITU G.709 standard.

➤ Optical channel Transport Lane (OTL)

The Optical channel Transport Lane (OTL) is an adaptation layer whose purpose is to re-use the modules developed for Ethernet 40GBASE-R and 100GBASE-LR4. These modules have a four-lane WDM interface to and from a transmit/receive pair of G.652 optical fibers, and connect to the host board via a 4-lane (OTL3.4) electrical interface.

The OTL layer is responsible for mapping the serial OTU signal onto a parallel path designated lanes. In the case of OTU4 the signal is distributed over 20 logical lanes and for OTU3 the signal is distributed over 4 logical lanes.

➤ **Optical Transport Unit (OTU)**

The OTU overhead is comprised of the SM, GCC0 and RES bytes.

The section monitoring (SM) bytes are used for the trail trace identifier (TTI), parity (BIP-8) and the backward error indicator (BEI), or backward incoming alignment error (BIAE), backward defect indicator (BDI), and incoming alignment error (IAE). The TTI is distributed over the multiframe and is 64 bytes in length. It is repeated four times over the multiframe.

General communication channel 0 (GCC0) is a clear channel used for transmission of information between OTU termination points.

The reserved (RES) bytes are currently undefined in the standard.

➤ Optical Data Unit (ODU)

The ODU overhead is broken into several fields: RES, PM, TCMi, TCM ACT, FTFL, EXP, GCC1/GCC2 and APS/PCC.

The reserved (RES) bytes are undefined and are set aside for future applications.

The path monitoring (PM) field is similar to the SM field described above. It contains the TTI, BIP-8, BEI, BDI and Status (STAT) field.

There are six tandem connection monitoring (TCMi) fields, which contain the BEI/BIAE, BDI and STAT fields. The STAT field is used in the PM and TCMi fields to provide an indication of the presence or absence of maintenance signals.

The tandem connection monitoring activation/deactivation (TCM ACT) field is currently undefined in the standards.

The fault type and fault location reporting communication channel (FTFL) is a message spread over a 256-byte multiframe that provides the ability to send forward and backward path-level fault indications.

The experimental (EXP) field is a field that is not subject to standards and is available for network operator applications.

General communication channels 1 and 2 (GCC1/GCC2) fields are very similar to the GCC0 field except that each channel is available in the ODU.

The automatic protection switching and protection communication channel (APS/PCC) supports up to eight levels of nested APS/PCC signals, which are associated to a dedicated-connection monitoring level depending on the value of the multiframe.


➤ **Optical Payload Unit (OPU)**

The primary overhead field associated to the OPU is the Payload Structure Identifier (PSI). This is a 256 bytes multi-frame where its first byte is defined as the Payload Type (PT). The remaining 255 bytes are currently reserved.

The other fields in the OPU overhead are dependent on the mapping and concatenation capabilities associated to the OPU. For an asynchronous mapping (the client signal and OPU clock are different) Justification Control (JC) bytes are available to compensate for clock rate differences, two methods are supported Asynchronous Mapping Procedure (AMP) and Generic Mapping Procedure (GMP). For a purely Bit-Synchronous Mapping Procedure (BMP) (client source and OPU clock are the same), the JC bytes become reserved (set to 0). Concatenation bytes are also available as described in ITU G.709.

Tandem Connection Monitoring (TCM)

TCM enables the user and its signal carriers to monitor the quality of the traffic that is transported between segments or connections in the network. SONET/SDH allowed a single level of TCM to be configured, while ITU G.709 allows six levels of tandem connection monitoring to be configured. The assignment of monitored connections is currently a manual process that involves an understanding between the different parties. There are various types of monitored connection topologies: cascaded, nested and overlapping. Examples of these topologies are provided in the following figure.

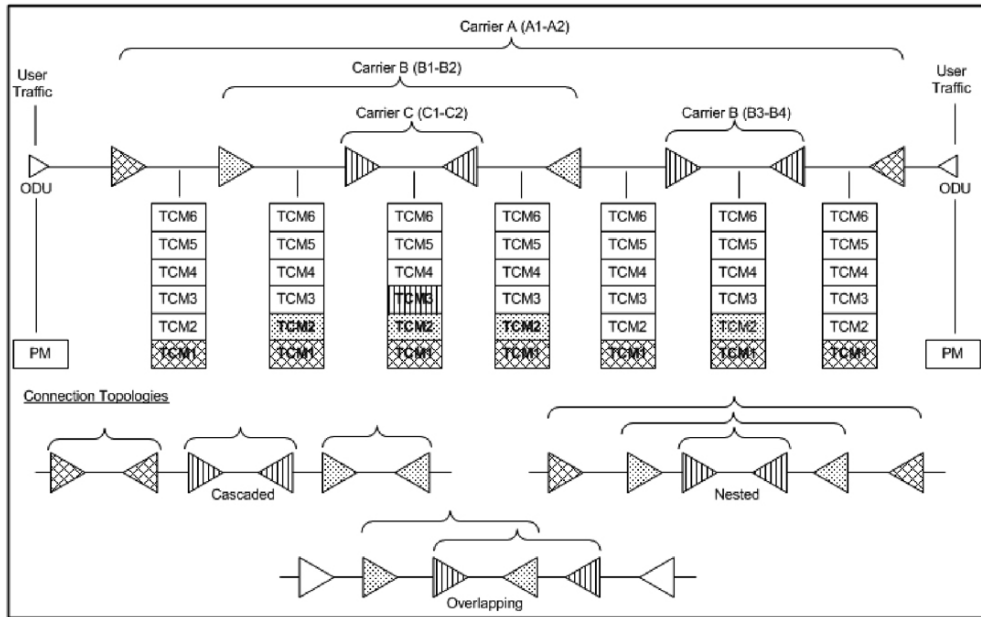

Tandem Connection Monitoring

Each of the six TCMi fields in the ODU overhead is assigned to a monitored connection. There can be from zero to six connections that can be configured for each connection. In the figure *Tandem Connection Monitoring* on page 658, there are three different connections that are actually monitored. Carrier C, due to its location, can monitor three TCM levels as the ODU passes through its portion of the network.

In addition to monitoring maintenance signals, using the STAT field associated with each TCM level, the TCM connection also monitors the BIP-8 and BEI errors for each connection level. Maintenance signals are used to advertise upstream maintenance conditions affecting the traffic and errors provide an indication of the quality of service offered at each segment of the network, which provides a valuable tool for the user and carrier to isolate faulty sections of the network.

Forward Error Correction (FEC)


The ITU G.709 standard supports forward error correction (FEC) in the OTU frame and is the last part added to the frame before the frame is scrambled. FEC provides a method to significantly reduce the number of transmitted errors due to noise, as well as other optical phenomena that occur at high transmission speeds. This enables providers to support longer spans in between optical repeaters.

An OTU frame is divided into four rows. Each row is broken down into 16 sub-rows comprised of 255 bytes each, as shown in figure *Forward Error Correction* on page 660. A sub-row is composed of interleaved bytes. The interleave is executed so that the first sub-row contains the first overhead (OH) byte, the first payload byte and the first FEC byte, and so on for the remaining sub-rows of each row in the frame. The first FEC byte starts at position 240 for all sub-rows.

Glossary

G.709 Optical Transport Network (OTN)

The FEC uses a Reed-Solomon RS (255/239) coding technique. This means that 239 bytes are required to compute a 16-byte parity check. The FEC can correct up to eight (bytes) errors per sub-row (codeword) or detect up to 16 byte errors without correcting any. Combined with the byte interleave capability included in ITU G.709 implementation, the FEC is more resilient in regards to error burst, where up to 128 consecutive bytes can be corrected per OTU frame row.

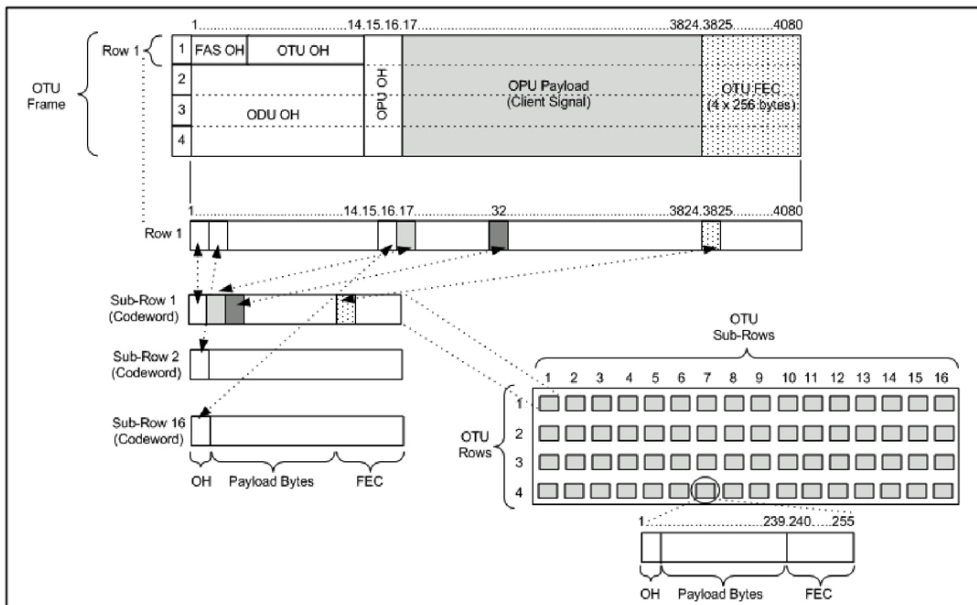

Forward Error Correction

ODU Multiplexing

The ODU multiplexer is a function that allows the multiplexing of ODU tributary signals into higher OTN signal rates. The G.709 standard supports 2 types of ODU multiplexer which can be classified as follows:

- Legacy architecture is based on multi-stage architecture to bring an ODUk client to a higher OTN interface rate. This multiplexer is identified by Payload Type 20 (PT 20).
- New architecture uses a single stage architecture to bring an ODUk client to any higher OTN interface rate. This method supports the ODUflex client signal. The multiplexer is identified by Payload Type 21 (PT 21).

Note: Refer to the OTN BERT on page 40 for the ODU multiplexing capabilities.

The multiplexing strategy is based on the concept of tributary slots, which is similar in concept to the SONET timeslot. The multiplexing of 4 ODU1 in one ODU2 is made by distributing the ODU1 structure in a repetitive sequence of 4 ODU2 Tributary slots, a similar strategy is used for ODU3 multiplexing where the repetitive sequence is made of 16 ODU3 tributary slots, refer to G.709 standard for detailed information.

The main attributes of the ODU multiplexer functionality are as follows:

- The Asynchronous Mapping Procedure (AMP) is used for multiplexing the tributary signals; this method uses a modified Justification Control mechanism which has 2 positive Justification Control bytes and one negative Justification Control byte.
- The new multiplex method also supports the Generic Mapping Procedure as the Justification Control mechanism is still using the OPU OH JC bytes.
- The Multiplex Structure Identifier (MSI) provides information that is specific to each type of multiplexer provided.
- Can handle multiplex signals with frequency offset of +/- 20 ppm on every layer for the legacy architecture while the new architecture (using GMP) can handle frequency offset of +/-100 ppm.

ODUflex

ODUflex provides the capability to carry client payload of variable size with a container size of 1.244 Gbit/s granularity. An ODUflex (L) signal can be transported once multiplexed in an ODUk (H) signal, the multiplexer in this case handles tributary slots of 1.244 Gbit/s and has a Payload Type 21. The ODUflex function can be used to transport 2 signal categories mapped in ODTUk.ts using GMP:

➤ Ethernet in ODUflex over GFP-F signal

The Ethernet packets are mapped in GFP-F as specified in G.7041, the packets are processed as follows:

- The Start of Frame Delineation bytes are terminated
- Inter Frame Gaps bytes are terminated
- PCS coding is terminated
- GFP overhead bytes added

Since the PCS coding is terminated, it is not possible to transport the Ethernet Link status transparently but it is accommodated by the Forward Defect Indication (FDI) and Remote Defect Indication (RDI) alarms over GFP. The RDI is used to carry the Remote Fault alarm while the FDI is used to carry the Local Fault.

GFP-F provides rate adaptation between the incoming Ethernet signal and the outgoing OPUflex transport signal. This brings the fact that GMP is operated at a fixed Cm value close to the maximum server capacity.

➤ CBR over ODUflex signal

ODUflex can transport Constant Bit Rate signal (bulk filled Test pattern) as Client of the ODUflex CBR function. This CBR function needs a Pattern generator that can operate at a data rate specified by the user, the range of the available data rates is qualified by the Bandwidth management function.

OTN Signal Rates

Rate	Signal
2.666057143 Gbit/s	OTU1
10.709225316 Gbit/s	OTU2
11.0491 Gbit/s	OTU1e
11.0957 Gbit/s	OTU2e
11.2701 Gbit/s	OTU1f
11.3176 Gbit/s	OTU2f
43.018413559 Gbit/s	OTU3
44.571 Gbit/s	OTU3e1
44.583 Gbit/s	OTU3e2
111.81	OTU4

MPLS Labels

The MPLS labels are listed in the following table.

Label	Description
0	IPv4 explicit null
1	Router alert
2	IPv6 explicit null
3	Implicit null
14	OAM alert
4 to 13, and 15	Unassigned
16 to 1048575	Label ID

SONET/DSn/SDH/PDH

SONET/DSn/SDH/PDH Nomenclature

The GUI will use the International or European nomenclature based on the SONET and SDH software options installed on the 700Gv2/800v2/890 Series.

Software option	Nomenclature
SONET only	International
SDH only	European
SONET and SDH	International

Signal Rates

Rate	SONET/DSn	SDH/PDH	
		International	European
1.544 Mbit/s	DS1	-	1.5M
2.048 Mbit/s	-	E1	2M
8.448 Mbit/s	-	E2	8M
34.368 Mbit/s	-	E3	34M
44.736 Mbit/s	DS3	-	45M
51.84 Mbit/s	STS-1e / OC-1	STM-0e / STM-0	52M
139.264 Mbit/s	-	E4	140M
155.52 Mbit/s	STS-3e / OC-3	STM-1e / STM-1	155M / STM-1
622.08 Mbit/s	OC-12	STM-4	STM-4
2.48832 Gbit/s	OC-48	STM-16	STM-16
9.95328 Gbit/s	OC-192	STM-64	STM-64

SONET/SDH High and Low Order Path Nomenclature

Path Type	SDH	SONET
High Order	AU-3	STS-1
	AU-4	STS-3c
	AU-4-4c	STS-12c
	AU-4-16c	STS-48c
	AU-4-64c	STS-192c
Low Order	TUG-3	-
	TUG-2	VTG
	TU-11	VT1.5
	TU-12	VT2
	TU-3	-

SONET/SDH Alarms and Errors Nomenclature

Layer	SONET	SDH
Physical	BPV/CV	CV
Section / Regenerator Section	LOF-S	RS-LOF
	SEF	RS-OOF
	TIM-S	RS-TIM
	FAS-S	RS-FAS
	B1	B1
Line / Multiplex Section	AIS-L	MS-AIS
	RDI-L	MS-RDI
	B2	B2
	REI-L	MS-REI
High Order Path	AIS-P	AU-AIS
	LOP-P	AU-LOP
	H4-LOM	H4-LOM
	PDI-P	-
	RDI-P	HP-RDI
	ERDI-PCD	ERDI-CD
	ERDI-PPD	ERDI-PD
	ERDI-PSD	ERDI-SD
	PLM-P	HP-PLM
	UNEQ-P	HP-UNEQ
	TIM-P	HP-TIM
	B3	B3
	REI-P	HP-REI


Layer	SONET	SDH
Low Order Path	AIS-V	TU-AIS
	LOP-V	TU-LOP
	RDI-V	LP-RDI
	ERDI-VCD	ERDI-CD
	ERDI-VPD	ERDI-PD
	ERDI-VSD	ERDI-SD
	RFI-V	LP-RFI
	UNEQ-V	LP-UNEQ
	TIM-V	LP-TIM
	PLM-V	LP-PLM
	BIP-2	BIP-2
	REI-V	LP-REI

SONET Numbering Convention


The 700Gv2/800v2/890 Series supports the Timeslot (default) and hierarchical two-level numbering conventions as per GR-253.

Hierarchical Notation:

The 700Gv2/800v2/890 Series supports numbering SONET high order path STS-1s and STS-3c using the two-level “STS-3#,STS-1#” convention in an OC-N. For example: STS-1 [2,3].

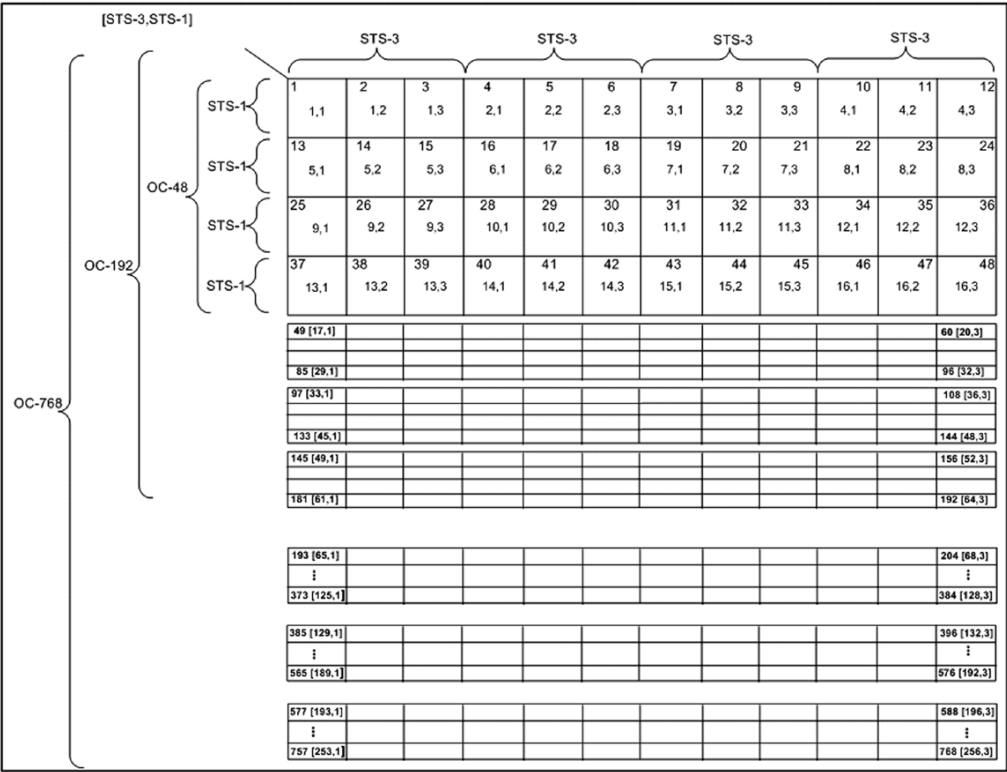

The 700Gv2/800v2/890 Series supports numbering SONET low order path using the two-level “VTGroup#,VT#” convention for numbering VTs within an STS-1. For example: VT1.5 [1,3], VT2 [3,2], VT6 [6,1].

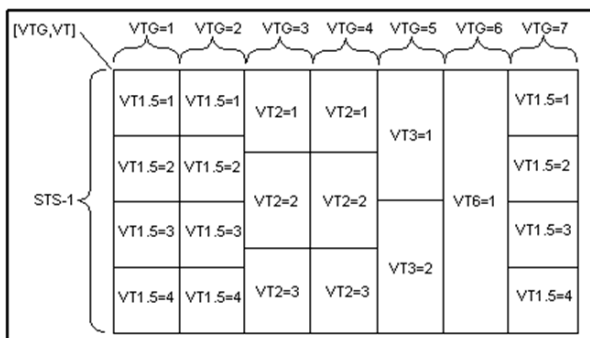

The 700Gv2/800v2/890 Series supports numbering SONET high order path STS-nc within an OC-N using the two-level “STS-3#,STS-1#”. For example: STS-12c [5,1].

Note: For STS-1e the numbering is limited to the A value as only one STS-1 exits.

SDH Numbering Convention

As per ITU G.707, the high order paths are defined using a 2 to 5 level convention E,D,C,B,A depending on the rate of the STM-n used.

- E: the AUG-64 are numbered 1 to 4
- D: the AUG-16 are numbered 1 to 4
- C: the AUG-4 are numbered 1 to 4
- B: the AUG-1 are numbered 1 to 4
- A: the AU-3 are numbered 1 to 3

Glossary

SONET/DSn/SDH/PDH

Naming is as follows for each of the following rates:

- [E,D,C,B,A] for STM-256
- [D,C,B,A] for STM-64
- [C,B,A] for STM-16
- [B,A] for STM-4
- [0] for AU-4 in STM-1
- [A] for AU-3 in STM-1
- [A] for the AU-3 in STM-0e, A=0.

The low order paths are defined using a 2 or 3 level convention K,L,M depending on the rate of the AU-4 or AU-3 used to multiplex the low order signals.

- K: the TUG-3 are numbered 1 to 3
- L: the TUG-2 are numbered within the TUG-3 0 or from 1 to 7
- M: the TU-2, TU-12, TU-11 are numbered within the TUG-2 1, 1 to 3, 1 to 4 respectively

Examples for AU-4 (3 level convention)

TU-3: [K,0,0]

TU-2: [K,L,0]

TU-12:[K,L,M] where M = 1 to 3

TU-11:[K,L,M] where M = 1 to 4


Example for AU-3 (2 level convention)

TU-2: [L,0]

TU-12: [L,M] M is numbered 1 to 3

TU-11: [L,M] M is numbered 1 to 4

The GUI Grid indicates the TUG-2 [x] and TUG-3 [x] values.

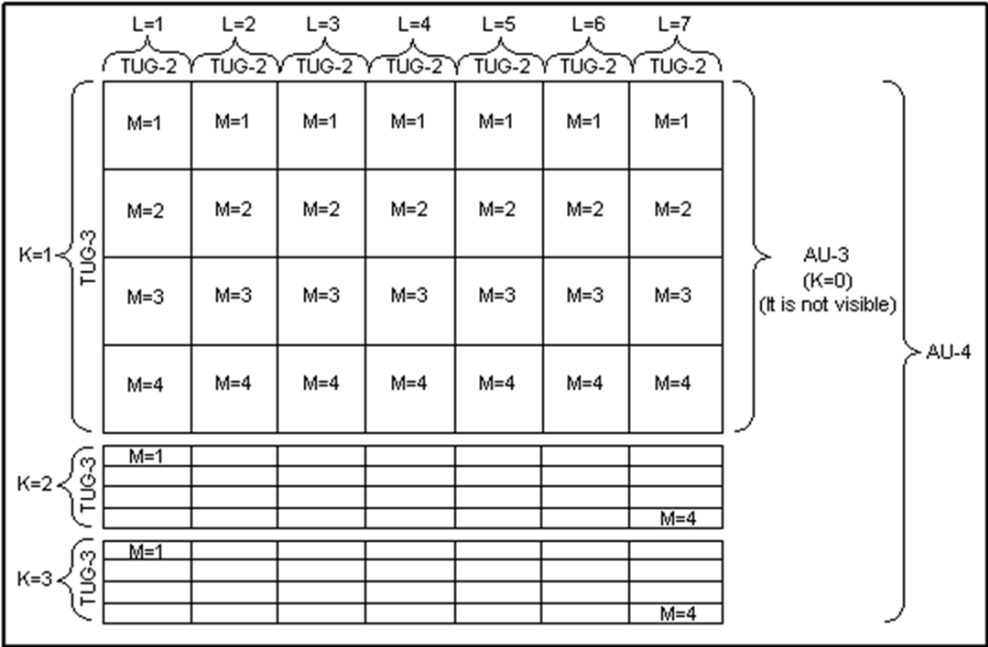

DSn/PDH Numbering Convention


The DS1 numbering in DS3 shall be numbered with respect to the DS2 muxing [DS2,DS1]. For example a DS3 has 7 DS2 and a DS2 has 4 DS1, so an example would be for a DS1 number [3,2]. The DS3 shall have a single number to represent its position. That is [1] all the time whether it is used in an STS-1 or it is the DS3 electrical interface.

The PDH do not have special grouping of the E1, E2, E3 or E4. This means that the PDH has a single number. For example E1 number 2 shall be number [2].

The E1 in DS3 via G.747 numbering uses the naming [DS2,E1]. However in the grid the label shall adapt itself to DS2 [x] or 6.3M [x] (where x = 1 to 7) with respect to the interface standard used: European or International.


SyncE

Synchronous Ethernet or SyncE enables a traceable network timing reference frequency to be distributed node-by-node across a chain of Ethernet devices (SyncE compliant devices only). The network timing reference is typically hierarchically traceable to a Primary Reference Source/Clock (PRS/PRC) in a unidirectional flow. Any node in the chain not compliant to SyncE automatically terminates the synchronization propagation but this does not impact the flow of traffic.

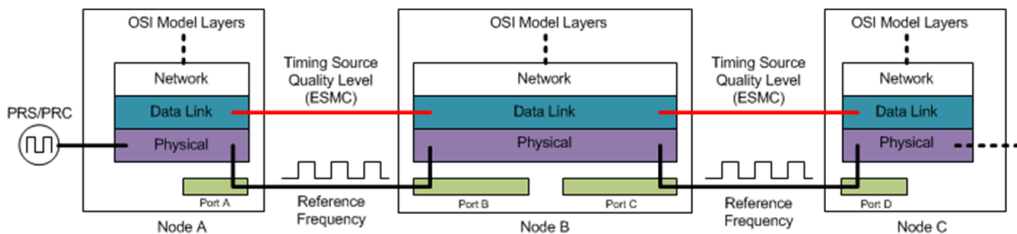

The Physical Layer carries the clock frequency and the Data Link layer carries the Quality Level (QL) associated to the transported frequency via Synchronization Status Messaging (SSM) embedded in the Ethernet Synchronization Message Channel (ESMC). The QL is transported via Information and Event PDUs typically transmitted at a rate of 1 frame per second but this rate can vary between 1 to 10 messages per second to respect the slow protocol rules. The Information PDU is used as heart-beat for the channel while one Event PDU is transmitted asynchronously to the Information PDU upon change of the QL value. Following this change, the Information PDU is also adjusted to match the new QL.

In order for an Ethernet interface to be considered Synchronous Ethernet compliant it needs to be upgraded as shown in the following diagram. In addition to supporting the ESMC channel, this upgrade consists in allowing the recovered clock from the CDR to be propagated to a function called the Ethernet Equipment Clock (EEC).

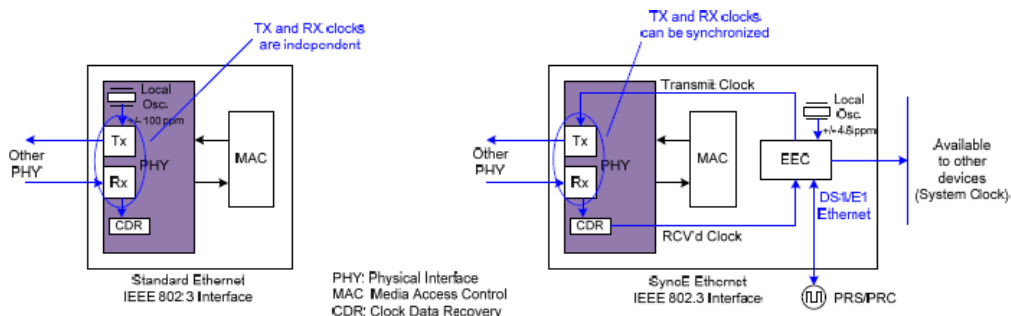

The EEC is present in a network element (NE) to determine which port should be used to distribute the frequency to other port(s) in the NE as well as what QL value to transmit over the ESMC to other network element in the network synchronization chain. The actual selection decision is based on the QL value received from the various port(s) in the NE. If none are valid the EEC is equipped with a better oscillator than a standard Ethernet interface to provide synchronization (Holdover mode). Typically the highest QL value is selected among the nominated sources within the network element.

Unicast/Multicast Addresses for Ethernet OAM

Unicast or multicast address can be used for most of S-OAM functions.

- Unicast addresses a unique destination address of the MEP.
- Multicast Class 1 addresses all MEPs in the MEG. The address value is 01-80-C2-00-00-3x, where x represents the MEG/MD Level.
- Multicast Class 2 addresses all MIPs and MEPs in the MEG. The address value is 01-80-C2-00-00-3y, where y represents the MEG/MD Level + 8.

The following table specifies which address type is used for each frame type.

Frame Type	Unicast	Multicast		Frame Type	Unicast	Multicast	
		Class 1	Class 2			Class 1	Class 2
CCM	X	X		LMM	X	X	
LBM	X	X		LMR	X		
LBR	X			SLM	X	X	
LTM			X	SLR	X		
LTR	X			AIS	X	X	
TST	X	X		CSF	X	X	
DMM	X	X		LCK	X	X	
DMR	X						

VLAN ID and Priority

Special VID values (IEEE Std 802.1Q-1998)

ID	Description
0	The null VLAN ID. Indicates that the tag header contains only user priority information; no VLAN identifier is present in the frame. This VID value must not be configured as a PVID, configured in any Filtering Database entry, or used in any Management operation.
1	The default PVID value used for classifying frames on ingress through a Bridge Port. The PVID value can be changed on a per-Port basis.
4095	Reserved for implementation use. This VID value shall not be configured as a PVID, configured in any Filtering Database entry, used in any Management operation, or transmitted in a tag header.

VLAN Priority

0	000 - Low Priority	4	100 - High Priority
1	001 - Low Priority	5	101 - High Priority
2	010 - Low Priority	6	110 - High Priority
3	011 - Low Priority	7	111 - High Priority

Index

1588 PTP 69, 117
802.1ag..... 236

A

A1 530
A2 530
Abort Frame 480
About button 30
Absolute 374, 384
Accept Connection from IP 294
Acceptable Errors 226, 227
Accuracy 226
Accuracy (Frames) 227
Acronym 615
Activate 272
Active Call 450
Actual L4 445, 459
Add Step 148
Additional Payload 518
Address 181, 191, 192, 193, 200, 201, 202
Address Type 240, 242, 369
Addressing 247
Advertised BB_Credit 151
after-sales service 608
AIS.... 317, 318, 319, 321, 322, 323, 335, 340,
342, 351, 483
AIS-L 353, 365
AIS-P 355, 365
AIS-V 362
Alarm Timeout/Threshold 122
Alarm/Status 511
Alarms 495
Alarms background color 308
Alarms/Errors Logger 384
Alarms/Status and Unassigned 509
ALERTING 376
Alignment 325
All 373
Amount 369, 510
Announce 119
ANSI TI-403 506
Answer Mode 171
Application buttons 30
Apply Channel TX to RX 268
APS 499
APS/PCC 527
Architecture 501
ARM 298
Arrow buttons 33
Arrows 98
Assign to Capture 514
Attempts 544
AU Path (C2) 176, 379
AU Path (J1) 476
AU Path (N1) 303, 476
AU-AIS 355
AU-LOP 355
Auto 161, 162
Auto-Answer 171
Automatic 160, 193, 202
Automatic IP (DHCP) 182, 191, 199
Auto-Negotiation 159, 180, 582
Auto-Reject 171
Auto-Response Loopback Status 454
AU-x 355
Available 248
Available BB_Credit 150
Average 309
Average RX Rate 409
Average TX Rate 411
Avg RX Rate 436
Avg. Round Trip Time 547

Index

B

B1.....	354, 367, 530
B2.....	354, 367, 532
B3.....	357, 367, 536
Background.....	265
Background Traffic.....	276
Back-to-Back.....	227, 456
Back-to-Back button.....	373
BANTAM.....	19
Base Station.....	115
Batch button.....	247, 282
Battery/AC Icons.....	26
BBE.....	391, 394
BBER.....	392, 395
B-Channel.....	174
BDI.....	335, 338, 342
BEI.....	337, 339, 344
Bell.....	266
BER.....	314
BER Pass/Fail Verdict.....	174
BER Threshold.....	126, 138, 438
BERT.....	124, 137
BERT Duration.....	296
BERT Threshold.....	296
BIAE.....	338, 342
Bidirectional.....	222
Binary.....	175, 267
Binary/Hex.....	195
BIP-2.....	364
BIP-8.....	337, 339, 344
Bit Error.....	126, 138, 314, 419, 438
Bit Error Count.....	419, 449
Bit Error Rate.....	419, 449
Bit Error Test.....	441
Bit-Oriented Message.....	502
Block.....	325, 328
BNC.....	18
BPV.....	333
BPV/CV.....	333
BRIDGE.....	133, 134
Bridge Request.....	501
Broadcast.....	477
BSD.....	335
BSF.....	335
Buffer Delay.....	445, 460
Buffer to Buffer Flow Control.....	150
Buffer Usage.....	520
Bulk Read.....	492
Burst.....	287, 409
Burst Count.....	288
Burst Duty Cycle.....	288
Burst Frames.....	142
Burst Max Rate.....	253
Burst Sequence.....	142
Burst Size.....	254, 409
Burst Test.....	146
Burst Time.....	227
Burst/IR Frame Ratio.....	143
Bursts.....	227
Burt.....	142
Busy.....	233
B-VLAN.....	187

C

C/R.....	504
C&M.....	162, 421
C&M Channel.....	162
C2.....	176, 537
cable.....	646
Cable Delay.....	562
Cable Mode.....	160, 583
Cable Test.....	67, 129
Calibration Failed.....	559
Call.....	171, 173
Call All at Start.....	169
Call at Start.....	170
Call Control.....	172
Call Establishment/Termination.....	172
Call Management.....	169
Call Origination Settings.....	169
CALL PROCEEDING.....	376
Call Reference.....	448

Call State.....	378	Clock	132, 315
Called Number	378, 448	Clock Accuracy	121, 426
Calling Number	378, 448	Clock block	99
Calling Party.....	169	Clock Class.....	121, 426
Cancelled.....	559	Clock Mode	121, 132, 426, 581
Capture button	521	Clock Out.....	136
Capture Source.....	517	Clock Out Low Speed.....	21
Capture Status	520	Clock Output (LS)	136
Carrier Ethernet OAM.....	65	Clock Synchronization	132
Cause Definition	378	C-LOS.....	351
Cause Value.....	378	Code.....	372
caution		Code Word	422
of personal hazard.....	3	Codeword.....	502, 509, 510
of product hazard.....	3	Collision	326
CBS.....	146, 255	Command/Response	505
CBS Test Time.....	143	Committed	248
CC Function.....	240	Committed - Burst Test.....	409
C-CDI.....	352	Committed Steps.....	410
CCM	463, 483	Complete.....	518
certification information	x	Config TCM	274
C-FDI	352	Config/Save	589
Cfg. Status	519	Configuration/Performance Results	442
CFP Interface	16	CONNECT.....	376
CFP/CFP2 Control.....	490	Connect.....	118, 219, 574
CFP/CFP2 Control Pins	491	CONNECT ACK.....	376
CFP/CFP2 Power Class.....	490	Connected	144, 221, 233
CFP/CFP2 Reference Clock.....	490	Connection	233
CFP/CFP2 Status Pins	492	Connector. 101, 108, 112, 113, 114, 133, 180,	
CFP/CFP2 TX Status.....	493	581	
CFP4.....	13, 15, 102, 109, 131	Continuity Check	240
Channel.....	174, 265, 448, 500, 510, 575	Continuity Check (Peer MEP)	462
Channel buttons.....	447	Continuous.....	242, 287, 558
CIR.....	207, 234, 250, 254	Control	510
CIR or CIR+EIR Frames	142	conventions, safety.....	3
CIR+EIR.....	207, 254	Copy	248
Circuit.....	506, 507	Copy From Throughput	229
Classification	204, 209	Copy RX.....	372, 475, 476
cleaning		Copy Service	248
front panel.....	603	Copy Services button.....	248
Cleaning Optical Connectors	604	Copy Stream button	282
Clear Logger.....	374	Count	308, 560
Client.....	105	Couple with Interface	183

Index

Coupled..... 106
Coupled RX to TX 137
CP-bit 318
CPRI..... 138, 316, 421, 641
CPRI/OBSAI BERT 72
CRC-4 320
CRC-6 317
C-RDI 352
Critical Event 452
CSF..... 340, 483
Cumulative Offset 557
Current..... 309, 433
Current Throughput 472
Customer Frame TX Rate 288
customer service..... 611
Cut Through..... 457
CV 333, 418

D

D1 531
D2 531
D3 531
D4 through D12 532
DAPI 300, 474
DAPI ODU-TIM 301, 475
DAPI OTU-TIM 301, 475
DAPI TCM-TIM 301
Data Call Pattern 174
Data Size 544
Date and Time 26
Date Stamp 382
D-Ch Down 334
D-Ch FCS 334
D-Channel 174
Decoupled 106
Default all OH..... 542
Default Gateway 182, 193, 194, 199, 202
Default Mapping..... 496
Default OTN OH 523
Defaults..... 149
Defect 126, 368, 387, 420

Delay 195, 544, 560
Delay (ms) 406
Delay Measurement..... 427
Delay Mode 118
Delay Req IPDV 427
Delay Skew 429
Delay Skew Threshold 130
Delay T14..... 562
Delay-Request..... 119
Delete Step 149
Destination 150
Destination B-MAC Address..... 187
Destination EoE MAC Address 186
Destination Flooding 189
Destination IP Address..... 191, 543
Destination MAC Address 188, 481
Destination Node ID 500
Destination Port 197
Details 385
Detection/Classification 432
Differentiated Services..... 196
Direction... 143, 233, 246, 409, 410, 435, 444,
456, 459
Disabled 162, 560
DISC..... 375
DISCONNECT 376
Disconnect..... 219, 574
Disconnected..... 144, 221, 233
Discover Remote..... 144, 221, 233
Discovered Topology 151
Displayed Results 373, 456
Disruption Count 420
Disruption Monitoring..... 127, 139
Disruption Time 387, 420
Distance To Fault 431
DM 375, 392
DMM 483, 484, 580
DMR 484, 580
Domain..... 117
Domain ID 239
Domain Mismatch 346

Drop Eligible 186, 187, 189, 203, 241, 243, 369, 563
DS0 check box 265
DS0/E0 Size 266
DS1 317, 454
DS3 318
DSCP Codepoints 196
DSn/PDH BERT 45
DSn/PDH Multiplexing 105
DSX-MON 133
Dual RX 106
Dual Test Set 144, 221, 233
Duplex 22, 160
Duration 235, 297, 385
Dying Gasp 453
Dynamic Ramp 148

E

E0 check box 265
E1 319, 530
E2 321, 536
E3 322
E4 323
EB 390, 393
E-bit 320
EBS 146, 255
EBS Test Time 143
EC 390, 393
ECN 196
Efficiency 470
EFS 393, 449
EMIX 207, 252
EMIX Frame Sizes 252
Emulation Mode 115
Enable 249, 283, 513
Enable TX 140
Enabled Time 513
Encapsulation 518
EoE 185, 186
EoE VLAN 186
equipment returns 611

ERDI-CD 356
ERDI-PCD 356, 367
ERDI-PD 356
ERDI-PPD 356, 367
ERDI-PSD 357, 366
ERDI-SD 357
ERDI-VCD 364
ERDI-VPD 364
ERDI-VSD 363
Error Count 382, 516
Error Running Total 383
Errors 495
Errors background color 308
ES 390, 393, 449
ESD 8
ESF 390
ESMC 291, 467
ESMC Generation 292
ESMC Loss 358
ESMC Monitoring 291
ESMC Rate Threshold 292
ESMC RX Rate 467
ESR 392, 395
Estimated BB_Credit 439
Estimated Time 222
ETag 186
EtherBERT 57, 137
Ethernet 162, 279, 324, 327, 579
 Traffic 477
Ethernet (All Unicast) 279, 579
Ethernet BW 386, 477, 516, 579
Ethernet Frame 141
Ethernet OAM 111
Ethernet Traffic 471
EtherSAM 52
EtherType 188
 0x88A8 187
 0x88E7 187
Event 384, 403
Event Count 468, 506
Event Counts 507
Event Running Total 383

Index

Event XXX - Additional Information 377
Exc. Coll..... 326
Exc. Skew 328, 341
Excess - Burst Test 409
Excess Steps 410
Excessive Skew Test 441
EXFO|Worx Interop 233
Exit button 30
EXP..... 526
Expected 156, 303, 372
Expected Message..... 299
Expected QL 122, 291, 399, 401
EXT CLK 13, 18, 21
Ext Clock In 133
External 132
EXZ..... 333

F

F1 531
F2 538
F3 539
Fabric 151
Fabric Status 152
Factory Default..... 198, 293
FAIL 28, 309
False Carrier..... 325
Far-End..... 393
FAS..... 316, 320, 321, 322, 323, 341, 344
FAS-S 354
Fault Indication 155, 371
Fault Indication Code 155
F-bit 318
FC BERT 71, 137
FC Frame 140
FCS 197, 325, 330
FD 210, 443
FEAC..... 509
FEBE 318
FEC 273, 659
FEC-CORR 344
FEC-CORR-BIT 344
FEC-CORR-CW 344, 348
FEC-CORR-SYMB 344
FEC-LOA..... 348
FEC-LOAML..... 348
FEC-STRESS-CW 345
FEC-SYMB 348
FEC-UNCORR 345
FEC-UNCORR-CW 345, 348
Fibre Channel 150, 329
Field Match..... 519
Filter 374, 515
 Mask 516
 Operator 516
 Value 515
Filter Configuration 514
Filter x 517
Filters..... 513
Fixed 207, 285
Flood Range 189
Flow Control..... 160, 582
 Traffic 480
Flow Direction 222
Flow Label 195
FLR..... 210, 443
Force Release 272
Format..... 302, 303
Frame Count 245, 288, 386, 439, 477, 516, 520, 579
Frame Count - RX 480
Frame Delay..... 242, 406, 465
Frame Delay Threshold 238
Frame Distribution 223
Frame Format..... 184, 198
Frame Loss 210, 242, 289, 290, 347, 407, 413, 414, 436, 443, 456
Frame Loss / Out-of-Sequence
 Stream 414
Frame Loss button 373
Frame Loss Configuration..... 228
Frame Loss Rate..... 255, 472
Frame Loss Ratio..... 465
Frame Loss Threshold 238

Frame Number	521
Frame Rate	386, 439, 477, 516, 579
Frame Size 140, 141, 208, 223, 244, 247, 251, 281, 285, 373, 478	
Frame Sync	421
Frame Type	207, 477
Framed L2	114
Framed Layer 1	109
Framed Layer 2	109
Framing 102, 109, 114, 117, 134, 135, 247, 264, 281	
Framing Bit	317
Frequency. 134, 136, 153, 154, 168, 262, 331, 422, 451	
Frequency/Offset	468
FRMR	375
front panel, cleaning	603
FSD	335
FSF	336
FTFL	155, 525
FTFL/PT	371
Function	242
Functions	29

G

G.709 OTN	648
G.742 Bit 12	567
G.751 Bit 12	566, 567
G.751 Bit 14, 15, 16	566, 567
G.8113.1	236
G1	538
GAL	241
GCC0	524
GCC1	527
GCC2	527
Generate & Save	522
Generated	176, 302
Generated Message	299
Generated Messages	502, 506, 509
Generated QL	292, 401
Global	

EtherSAM	144
RFC 2544	221, 222
Services	246
Streams	281
Global alarm	28
Global Copy RX	372, 475
Global indicator	27
Global IPv6 Address	192, 201
Global Options	147, 222, 248, 282
Global Pass/Fail Verdict	289
Global Test Duration Estimate	146
Global Thresholds Type	289
Global Verdict	28
GM Info	120, 425
GM IP Address	118
Granted Power Class	432
Granularity	228
Graph	
RFC 2544	373
Traffic	482
GTE	266

H

H1	531
H2	531
H3	531
H4	538
H4-LOM	355
Hang-Up	173
Hang-UP All	173
HDLC	162
HDLC Mode	174
Header Layer	518
Headset	20
Help button	30
Hi-BER	324
HOP Limit TTL	195
HP-PLM	356
HP-PLM/HP-UNEQ	379
HP-RDI	356
HP-REI	357

Index

HPTC-IAIS 359
HPTC-IEC 361
HPTC-LTC 359
HPTC-ODI 359
HPTC-OEI 361
HPTC-RDI 360
HPTC-REI 361
HPTC-TIM 360, 476
HPTC-UNEQ 276, 359
HPTC-VIOL 360
HP-TIM 303, 355, 476
HP-UNEQ 355
Hyperframe 422

I

I (Information) 374
I/O Interface Quick Check 440
IAE 338, 342
ID 384
Ideal L4 445, 459
identification label 608
Identity 120, 425
Idle 267, 318, 325, 504
Idle Code 175
IFDV 210, 443
Import/Export tab 597
Information 403
Information Count 468
Information Rate 254
Informational 409, 411
Initial Window Size 295
Inject 438, 481, 502, 510, 549
Inject button 368, 370
Injection 506
Injects 502
Interface.... 158, 179, 214, 296, 331, 454, 517
Interface block 99
Interface ID Coupled 192, 201
Interface Type 133, 135
Interface/Rate... 100, 107, 112, 113, 114, 179, 581

Internal..... 132, 581
Inv. Mapping 327
Inv. Marker 328, 341
Invalid DMR 406
Invalid LBR 404
Invalid LMR 407
Invalid LTR 564
Invalid Payload 405
Invalid SLR 408
Invalid TST 405
Invert 125, 137, 174
iOptics 38
IP 191, 220, 279, 579
IP Address..... 182, 199, 239
IP Checksum 334
IP TOS/DS 118, 195, 294, 544
IP Version 182, 184, 199
IP/UDP/TCP 334
IPDV 397
IPDV Threshold 122
IPv4 191, 199
IPv6 191, 200
IPv6 Destination Address 193
iSAM 39
ISDN 334
ISDN Logger 374
ISDN PRI 51
ISDN Settings..... 174
I-TAG 187
ITU G.8275.1 117

J

J0..... 530
J0 Trace 164, 486
J1..... 536
J1 Trace 164, 486
J2..... 541
Jabber..... 325
jammed bit 8 266
JC 524, 526, 527

Jitter..... 210, 290, 412, 414, 443, 472
 Streams 414
 Job Information..... 589

K

K1..... 499, 532
 K2..... 500, 532
 K3..... 539
 K4..... 542
 Keyboard usage..... 34

L

L1 Reset..... 422
 L2 204
 L3/L4 204
 Label 241, 486
 Label 1 241, 386
 Label 2 241, 386
 label, identification 608
 Labels..... 176, 379
 Lanes Mapping & Skew 494
 Lanes with Disruption 388
 LASER 22
 Laser..... 165, 256
 Laser OFF at Start-Up 166, 181, 216, 257
 Laser On 607
 Laser ON/OFF..... 165, 257, 498
 Last 309
 Last Change 398, 427, 468
 Last Link Trace Status 563
 Last QL Message..... 468
 Last QL Received..... 398, 401, 427
 Late Coll. 326
 Latency..... 210, 290, 412, 415, 443, 456, 472
 Streams 415
 Latency button 373
 Latency Configuration 229
 Latency Measurement Mode 147
 Latency Tag 140
 Latency Tag Insertion 140
 Layer 204, 368, 457

Layer 2 messages..... 374
 Layer 3 messages..... 376
 LBM 483, 484, 580
 LBO 135, 258
 LBR 484, 580
 LBR Timeout 404
 LCD-P 366
 LCK 336, 351, 483
 Lease Duration..... 119
 LED 22
 Blue..... 22
 Legend TX/RX 528
 Length 429, 431
 Length Threshold..... 130
 Length Unit 129
 Line..... 353
 Line Coding 134, 135, 259
 Line Utilization..... 386, 439, 477, 516, 579
 LINK..... 158, 179
 Link Activity 504, 507, 511
 Link Capacity 282
 Link Down 316, 324, 329
 Link Events 381
 Link Fault 453
 Link OAM..... 177, 452
 Link Trace 563
 LINK/RX..... 22
 Link-Local IPv6 Address..... 191, 200
 LMM 483, 484, 580
 LMR 484, 580
 Loaded Voltage 433
 LOAML..... 328
 LOC..... 315
 LOC Lane 331
 Local 234
 Local block..... 95
 Local Clock 160, 583
 Local Fault Det..... 324
 Local Fault Detected 329
 Local Fault Rcd. 324
 Local Fault Received..... 329
 Local Module Identification 574

Index

Local Parameters	239	LPTC-IAIS	359
Local to Remote	222	LPTC-LTC	359
Location	378	LPTC-ODI	359
LOF.... 316, 319, 321, 322, 323, 341, 343, 365		LPTC-OEI	361
LOF-S	353	LPTC-RDI	360
Logger	384	LPTC-TIM	303, 360, 476
Alarms/Errors Logger	384	LPTC-UNEQ	276, 359
ISDN	374	LPTC-VIOL	360
Logger Full 417, 423, 437, 446, 452, 455, 459, 461, 466, 469, 472		LP-TIM	303, 363, 476
Logical Lane	494, 495	LP-UNEQ	176, 363
Login	151	LSP	241
Logo	590	LTC	338
LOL	341	LTM	483, 484, 580
LOM	343	LTR	484, 580
LOMF	319	LTR Timeout	564
Longest Disruption	388		
Loop Down	573	M	
Loop UP	573	MO	533, 536
Loopback	242, 269, 279, 404, 511, 580	M1	533, 536
Loopback Commands	510, 512	MA Name	239
Loopback Mode	111, 579	MAC	220
Loop-Down	219, 269, 272	MAC Address	198, 239, 240
Loop-Up	219, 269, 272	MAC/IP/UDP	183
LOP-P	355, 366	MAID	239
LOPPS-L	147, 315	maintenance	
LOPPS-R	147, 315	front panel	603
LOP-V	362	general information	603
LOR	341	Manual	160, 369, 438, 519
LOS	331, 418	Manual Loopback Status	454
Loss Announce	346	Manual Mapping	496
Loss Continuity	349	Manual Skew	497
Loss Sync	346	Margin	229
LP-ERDI-CD	364	Mask	
LP-ERDI-PD	364	Filter	516
LP-ERDI-SD	363	Matching & Swapping	279
LP-PLM	176, 363	Max Hop Count	545
LP-PLM/LP-UNEQ	379	Max Jitter	255
LP-RDI	362	Max Latency	255, 436
LP-REI	364	Max Offset	451
LP-RFI	362	Max Rate	369, 438
LPTC-	361	Max Round Trip Time	547

Max Round-Trip Latency.....	255	Modify E0.....	266
Max RX Power.....	165, 257	Modify Frame Structure.....	184
Max RX Rate.....	436	Modify Loop Codes.....	270, 272
Max TX Rate.....	287	Modify Structure.....	98
Max. (-/+) Offset.....	468	Ethernet Test Applications.....	107
Max. Jitter.....	436	Packet Sync Test Applications.....	112, 113
Max. Negative Offset.....	154, 262	Transport Test Applications.....	100
Max. Offset.....	168	Wireless Test Applications.....	114
Max. Positive Offset.....	154, 262	Modify Structure button.....	100
Max. Rate.....	225, 228	MON.....	134
Maximum.....	309	Monetary Cost.....	196
Maximum OAMPDU Size.....	380	MPLS.....	190, 386
Maximum Window Size.....	295	MPLS Label.....	185
MD Level.....	240	MPLS-TP Label Stack.....	241
MDIO - Bulk Read.....	492	MPLS-TP Mode.....	241
MDIO Address.....	493	MPLS-TP OAM.....	111, 236, 349, 380, 404
MDIO Data.....	493	Traffic.....	483
MDIO End Address.....	492	MPLS-TP OAM Responder.....	237
MDIO Read.....	493	MS.....	353
MDIO Start Address.....	492	MS-AIS.....	353
MDIO Write.....	493	MS-RDI.....	354
Measure Delay button.....	559	MS-REI.....	354
Mechanism.....	118	MS-REI Computation Method.....	276
MEF.....	236	MTU.....	444, 459
MEG ID.....	239	Multicast.....	477
MEG Level.....	240, 369	Multicast MAC.....	117
MEP ID.....	240	Multiplexer Action.....	380
Message Rate.....	119	Multiple Connections.....	234
Message Type.....	374		
Metrics.....	412		
MFAS.....	345, 523		
Mid-Trigger.....	520		
Min Round Trip Time.....	547		
Min RX Power.....	165, 257		
Minimum.....	309		
Minimum RTT.....	444, 459		
Minimum Window Size.....	295		
Mismatch '0'.....	314		
Mismatch '1'.....	314		
Mismerge.....	349		
Mode.....	117, 279, 369, 509, 558		
Modify DS0.....	266		

N

N1.....	539
N2.....	541
n-Burst.....	287
NDF.....	557
Near-End.....	390
Negative.....	168
Negotiation Status.....	118, 424
Network.....	171, 198
Network block.....	95
Network Details.....	204, 217
Network Layer.....	185

Index

New Data Flag 549
New Pointer 549
Next HOP Router 239
n-Frame..... 287
NI/CSU Emulation 50
NJO..... 527
No Defect Time 127, 139
No NDF..... 557
No Pattern Analysis (Live) 124, 137
No Traffic 314
No Traffic Time..... 139
None 266, 268
None (All 1's) 511
Non-Unicast 478
n-Ramp 287
Number 170, 276
Number of Burst Sequence..... 143
Number of Calls 250, 284
Number of Channels 250, 284
Numbering Plan 169
Numbering Type..... 169

O

OA1 523
OA2..... 523
OAM Mode 177, 236, 380
OAM Quick Ping 188, 240
OAM Type 111
OAM Version 380
OCI..... 336
ODU 656
ODU Multiplexing..... 661
ODUflex..... 663
ODUx..... 335
ODUx-TCM 338
Offset 134, 153, 154, 167, 168, 260, 262, 422,
451
On Error 519
One-step 121, 426
One-Way Latency Threshold 232
OOF..... 317, 318, 341, 343

OOM..... 343
OOR..... 341
Operation 433
Operation Mode 233, 501
Operator
 Filter..... 516
Operator Identifier..... 155, 371
Operator Specific..... 155, 301, 371, 474
Operator Sys Access..... 171
Optical Device Under Test block 94
Optical Lane 165, 256
Optical RX Power Test 441
Optical TX Power Test..... 441
OPU 657
OPU Tributary Port..... 274
OPU Tributary Slots 274
OPU-PLM 157, 372
OPUx 340
OTL 341, 654
OTL-SDT..... 387
OTN 523
OTN BERT 40
OTN BIP-8 328
OTN Multiplexing 103
OTU 655
OTU frame structure..... 653
OTU overhead..... 653
OTU1 273
OTU1e 273
OTU1f..... 273
OTU2 273
OTU2e 273
OTU2f..... 273
OTU3 273
OTU3e1 273
OTU3e2 273
OTU4 273
OTUx 342
OUI 188, 380
Out-of-Seq..... 347
Out-of-Sequence 289, 290, 413, 414, 473
Oversize..... 325, 330

Oversize Monitoring	326
Overtake	219
Overwrite Fixed Stuff	276

P

P1	414, 477, 480, 482, 517, 543
P2	414, 477, 480, 482, 517, 543
Packet Capture	517
Packet Pause Time	481
Packets Received	547
Packets Transmitted	547
Pair	429
Parameters	143, 234
Parser Action	380
PASS	28, 309
Pass/Fail Verdict 123, 126, 128, 130, 138, 139, 140, 147, 222, 235, 238, 292	
FAIL	309
PASS	309
Path Signal Label (C2)	164, 486
Path/Mapping	
DSn/PDH BERT	46
OTN BERT	41
SONET/SDH - DSn/PDH BERT	48
SONET/SDH BERT	43
Pattern	124, 137, 268
Pattern Error	138, 314, 419
Pattern Error Count	419
Pattern Error Rate	419
Pattern Loss	314
Pause Frames	480
Payload	197, 245
Payload Content	267
Payload Type	156, 372
PBB-TE	185, 187
P-bit	318
PCS BIP-8	328
PCS BIP-8 Mask	328
PCS Lane	494, 495
PCS Lanes	327
PD	210

PDI-P	356
Peer MEP Parameters	240
Per Direction Configuration	147
Percentage Lost	547
Performance	448
Performance Criteria	210, 255
Performance Information	508
Performance Monitoring	389
Performance Report Message	506
Performance Test	205
Period	241, 243, 288, 369
Phone Book Name	173
Physical clock port	99
Physical Interface	
Electrical	258
Optical	256
Physical interface port	98
Ping & Trace Route	543
Ping button	544
Pins	429
PLM	340
PLM-P	356, 366
PLM-P/UNEQ-P	367, 379
PLM-V	176, 363
PLM-V/UNEQ-V	379
PM	526
PM & TCM	525
PM TTI Traces	299, 474
PoE	129, 432
PoE Loaded Voltage Thresholds	130
Point To Point	151
Pointer Adjustment	548
Pointer Value	548, 557
Port #1 to Port #2	222
Port #2 to Port #1	222
Port 1	107, 114
Port 2	107, 114
Port Status	152
Positive	168
Post-Trigger	520
Power	433
Power Class	130

Index

Power Consumption..... 441
Power Presence 432
Power Range 166, 257, 582
Power Recovery 423, 437, 452, 458, 461, 466,
469
Power Threshold 296
Preamble/SFD 186
Precedence 195
Prefix Mask..... 193, 202
Pre-Trigger 520
Primary Port / Secondary Port..... 108
Priority 181, 186, 187, 189, 203, 240, 243, 369,
502, 504, 563
PRM..... 504, 508
PRM Bit Events 506, 507
product
 identification label..... 608
 specifications..... 2, 613
Profile..... 117, 206, 250
 Services..... 249
 Streams 283
Profile button..... 284
PROGRESS 377
Progress Desc. No..... 378
Progress Description..... 378
Prompt 171
Prop. Delay..... 428, 431
Prop. Delay Threshold 130
Protected Channel..... 500
Protocol..... 161, 421
Protocol block 99
PSE Type..... 432
PSI 527
PSP (Link Protocol) 161
PTP 346
PTP Message 396
PTP Stats 396
Ptr. Decr. 557
Ptr. Incr. 557
PW 241

Q

QL Message 468
QL Mismatch 346, 358
QL Mismatch Frame Count 402, 468
QL Mismatch Monitoring... 122, 291, 398, 401
QL Rate..... 292
QoS Metrics 289, 347
QoS Metrics Tags Insertion 282
QSFP 13, 15, 131
Quality Level 122, 398, 401, 427
Quantity 223
Quick Ping 118, 194, 294

R

RAI..... 316, 317, 319, 321, 322, 323
RAI MF..... 319
Ramp 287
 EtherSAM..... 148
 Service Configuration..... 410
Ramp Cycle Count 288
Ramp Duration 148
Ramp Nb. of Steps..... 288
Ramp Test..... 145
Random 285
Random Mapping..... 496
Rate 163, 171, 174, 284, 308, 369, 438
Rate Unit 222, 234, 248, 282, 295
rates 664, 666
RDI..... 318, 350
RDI-L..... 354, 365
RDI-P 356, 366
RDI-V 362
Ready 233, 559
Receipt Timeout..... 122
Receive Messages 504, 511
Received 372
Received QL 291
Receiving Live Traffic 418
REF OUT..... 13, 21
Refill 142
Refill Delay..... 142

Refill Delay Ratio	143	Restore Default.....	252, 293
REI-L	354, 368	Restore Default at Start-Up.....	293
REI-L Computation Method	276	Restore EtherSAM Defaults.....	147
REI-P.....	357, 368	Restore ISDN PRI Defaults.....	175
REI-V	364	Restore RFC 2544 Defaults.....	223
REJ	375	Restore RFC 6349 Defaults.....	235
Relative	374, 384	Restore SyncE Defaults	292
RELEASE	376	Restore TCP Throughput Defaults.....	295
Release	272	Restore Test Application Defaults	128
RELEASE COMPLETE	376	Results.....	29, 545
Reliability.....	196	Re-transmitted Frames.....	470
Re-Login	151	return merchandise authorization (RMA) ..	611
Remote.....	234	Revision	380
Remote block	95	RFC 2544	54
Remote Fault.....	324, 329	Global	222
Remote IP Address	234, 294	RFC 6349	56, 233
Remote Loopback.....	381	RFC 6349 Results	442
Remote Modules Discovery	572	RFC 6349 Test on Service 1	205
Remote Radio Head.....	115	RFI-V	362
Remote to Local	222	RJ45.....	18
Remote unit in DTS Mode	435, 455, 459	RJ48C.....	19
Remote unit in use and locked for DTS.....	434, 455, 459	R-LOF.....	316
Renewal Interval.....	119	R-LOS.....	316
Replied Details.....	547	RNR	375
Report Content.....	507	Round Trip Delay	561, 562
Request	499	Round Trip Latency.....	471
Requesting MEP ID TLV	243	Round-Trip Latency.....	439
RES	524, 525, 526, 527	Round-Trip Latency Threshold	140, 439
Reserved Bit.....	196	RR.....	375
Reset	560	RS	353
Reset button.....	593	RS (J0).....	476
Reset Skew	497	RS-FAS	354
Resolve MAC	239	RS-FEC	348
Resolve MAC Address.....	188, 194, 220	RS-LOF.....	353
Responder	484	RS-OOF	353
RESTART	377	RS-TIM	303, 353, 476
RESTART ACK.....	377	RTD	558, 561
Restore 1588 PTP Defaults.....	123	RTT	443
Restore Cable Test Defaults	130	Running.....	559
Restore Carrier Ethernet OAM Defaults.....	245	Runt.....	326
Restore CPRI/OBSAI Defaults.....	138	RX button	529
		RX CCM	462

Index

RX DMR	406
RX Frame Count	413
RX Frames	456
RX Frequency	154, 168, 262, 422
RX LBR	404
RX Line Utilization	465
RX LMR	407
RX LTR	564
RX OH Byte Details	528
RX Pattern	124
RX Pattern Analysis	174
RX Pointer Adjustment	557
RX Power	165, 256, 581
RX Power Range	296
RX Rate	412, 416, 443
RX SLR	408
RX Termination	259
RX TST	405

S

S. & F.	457
S1	275, 532
Sa4	566, 567
Sa5	566, 567
Sa6	566, 567
Sa7	566, 567
Sa8	566, 567
SABME	374
safety	
caution	3
conventions	3
warning	3
SAPI	300, 474
SAPI ODU-TIM	301, 474
SAPI OTU-TIM	301, 474
SAPI TCM-TIM	301
SATUS ENQUIRY	377
Save to CSV	492
Save/Load button	594
Save/Load tab	595
Scrambler	273
Scrambling	161
SDI	316
SDT Threshold	128, 139, 421
Secondary Port	108
Seconds	308
Seconds per Service	145
Section	241, 353
Section (J0)	476
SEF	353, 365
SEP	393
SEPI	393
Sequence	161, 421
Service	249, 435, 443, 444
service and repairs	611
service centers	612
Service Configuration	
Ramp	410
Service Configuration Test	145, 204, 435
Service Configuration Test button	435
Service Configuration Test Status	434, 442
Service Disruption	126, 387, 420
Service Duration	119
Service Name	143, 246
Service Name and Selection	409, 410, 412
Service No	143
Service Performance	412
Service Performance Test	146, 435
Service Performance Test button	435
Service Performance Test Status	434, 442
Service Selection	183
Services	206
SES	390, 393, 449
SESR	392, 395
Set All	267
SETUP	376
Setup	29
SFP	607
SFP+	13, 131
Shaping	287
Shaping button	288
shipping to EXFO	611
Si0	566, 567

Si1	566, 567	Spare Bits	566
SID	187	Special VID values	679
Signal	256	Specific IP	572
Signal Auto-Detect	116	specifications, product	2, 613
Signal Configuration	263	Speed	160, 181, 582
DSn/PDH	264	Start button	598
OTN	273	Start Time	297, 417, 423, 426, 428, 434, 437, 440, 442, 446, 452, 454, 455, 458, 461, 466, 469, 472, 578
SONET/SDH	275	Stateless Auto	191, 192, 200, 201
signal rates	664, 666	Static	191, 193, 200, 202
Signaling Bits	565	Statistics	450
Single	558	STATUS	377
Skew	494	Status	417, 446, 454, 458, 462, 464, 546, 559, 578
Skew Alarm Threshold	498	Status Bar	24
Skew Threshold	296	Alarm/Error Injection	26
SLA button	247	Amplitude	25
SLA Parameters	254, 412	B-Channel	24
SLA Verified	409, 410	Busy	25
SLM	483, 484, 580	Clock synchronization	25
SLR	484, 580	Connected	25
SM	524	D-Channel	24
SM TTI Traces	299, 474	Disconnected	25
SMA	21	ESMC	24
Smart Loopback	61, 279	Interface/Signal	24
S-OAM	184, 190, 236, 349, 380, 404	Laser	25
Traffic	483	LINK	24
S-OAM Link Trace	563	Loopback	25
S-OAM Responder	237, 280, 580	Loopback mode	26
Software options	30	OH	26
SONET/SDH	529	P1, P2	24
SONET/SDH - DSn/PDH BERT	47	Pattern	25
SONET/SDH BERT	42	Power level	25
SONET/SDH Multiplexing	104	PTP	24
Sort By	374, 384	Test icon	24
Source	150	TX/RX, TX, RX	24
Source B-MAC Address	187	Step	373, 456, 457, 548
Source EoE MAC Address	186	Step Size	261
Source Flooding	189	Step Size	153, 167
Source IP Address	191, 543	Step Time	148, 288
Source IP Multiplier	194	STM-1 Channel	529
Source MAC Address	188		
Source Node ID	500		
Source Port	197		

Index

Stop button.....	598
Stop Time.....	298
storage requirements.....	603
Stream.....	283, 414, 415, 416, 473, 543
Stream Name.....	281
Stream Selection.....	183
Stream Selection and Activation.....	283
STS Path (C2).....	176, 379
STS Path (J1).....	476
STS Path (N1).....	303, 476
STS-1 Timeslot.....	529
STS-x.....	355
Subchannel.....	162
Subnet.....	572
Subnet Mask.....	182, 194, 199
Subtest Duration.....	146
Subtests.....	145, 222
RFC 2544.....	224
Subtests EtherSAM.....	
Service Configuration Test.....	204
Summary.....	417
1588 PTP.....	423
Cable Test.....	428
EtherSAM.....	434
FC BERT.....	437
iSAM.....	440, 442
ISDN PRI.....	446
MPLS-TP OAM.....	452, 461
NI/CSU Emulation.....	454
RFC 2544.....	455
RFC 6349.....	458
S-OAM.....	452, 461
SyncE.....	466
TCP Throughput.....	469
Traffic Gen & Mon.....	472
Sweep.....	286
Switching Mode.....	499
Symbol.....	325, 330
symbols, safety.....	3
Sync.....	119
Sync IPDV.....	427
SyncE.....	70, 291, 358

Synchronization Status Message (S1).....	275
Synthetic Loss.....	242, 408
Synthetic Loss Ratio.....	465
Synthetic Loss Threshold.....	238
System.....	89, 293

T

T0.....	508
T0-1.....	508
T0-2.....	508
T0-3.....	508
Target.....	572
TC.....	241
TC-IAIS-P.....	359
TC-IAIS-V.....	359
TC-IEC-P.....	361
TC-LTC-P.....	359
TC-LTC-V.....	359
TCM.....	274, 276, 359, 658
TCM Access Point Identifier.....	303
TCM ACT.....	525
TCM TTI Traces.....	299
TCM1.....	526
TCM2.....	526
TCM3.....	526
TCM4.....	525
TCM5.....	525
TCM6.....	525
TC-ODI-P.....	359
TC-ODI-V.....	359
TC-OEI-P.....	361
TC-OEI-V.....	361
TCP.....	197
TCP Checksum.....	334
TCP Connection Configuration.....	294
TCP Connection Status.....	470
TCP Efficiency.....	445, 459
TCP Mode.....	294
TCP Port.....	234, 294
TCP Server Port.....	234
TCP Throughput.....	64, 294, 471

TCP Throughput Configuration	295	Test Timer	29
TCP Throughput Threshold (% of ideal)	460	Threshold	175, 295, 382
TC-RDI-P	360	Threshold (% of ideal)	205, 235
TC-RDI-V	360	Thresholds	238, 414, 415, 416
TC-REI-P	361	Through	106
TC-REI-V	361	Through Mode	63
TC-TIM	303	Throughput	195, 224, 289, 290, 456
TC-TIM-P	360, 476	Streams	416
TC-TIM-V	360, 476	Throughput button	373
TC-UNEQ-P	276, 359	Throughput meter	470
TC-UNEQ-V	276, 359	Throughput Pass/Fail Verdict	295
TC-VIOL-P	360	Throughput Threshold	470
TC-VIOL-V	360	TIM	336, 338, 343
technical specifications	2, 613	Time	384, 508
technical support	608	Time Mode	374, 384
Temp. Threshold	296	Time Source	121, 426
Temperature	441	Time Stamp	382
temperature for storage	603	Timeout	544, 545
TERM	133, 134	Timer	29, 89, 297
Termination	133	Timeslot	276
Test	242, 405	TIM-P	303, 355, 476
Test Applications	37	TIM-S	303, 353, 476
Test Block	99	TIM-V	303, 363, 476
Test Configurator	89	Title Bar	26
Ethernet Test Applications	96	TLV Type	245
Fibre Channel Test Application	97	To the following Services	248
Intelligent Apps	94	Tone	267
Overview	94	Topology	98, 106, 111, 115
Packet Sync Test Applications	97	TOS/DS	195, 234
Transport Test Applications	96	TOS/DS Config	195
Wireless Test Applications	97	Total Burst Test Time	143
Test Control	29	Total Calls Count	450
Test Function	242	Total Frame	480
Test ID	245	Total Number of Bytes	518
Test Menu	29	Total PTP Messages	427
Test Parameters	253	Total TX Rate	248, 250, 282, 289
Test Pattern	245	Total TX/RX MPLS	386
Test Recovery 417, 423, 446, 455, 458, 472		Trace Route	545
Test Sequence block	94	Traces	486
Test Setup	37	OTN	299, 474
Test Status 423, 428, 437, 444, 452, 461, 466, 469, 472		SONET/SDH	302, 476
		Traffic	439, 477

700U

700Gv2/800v2/890 Series

Unframed (Interop)	110
Unframed BERT	124, 137
Unframed with Sync.....	110
Unicast	478
Unidirectional.....	381
Unit	457
Unloaded Voltage	433
Unusable	346
Use Stream.....	544
User Defined Codes	196
User Performance	210

V

V5	540
Val.....	456
Valid Event Count.....	507
Validations	226
Value	548
Filter	515
Variable Retrieval	381
Vendor Specific Information.....	381
Verdict	28
--.....	28
FAIL	28, 309
PASS	28, 309
Version 1	161
Version 2	161
VID	679
Video.....	284
Video Codec.....	250, 284
View File After Generation	522
VLAN	189, 281
VLAN (ID/Priority)	247
VLAN ID.....	181, 186, 187, 189, 203
VLAN ID/Priority.....	181
VLAN Priority.....	679
VLAN Tag	185, 203
Voice	284
Voice Codec	250, 284
VT	362
VT Path.....	278

VT Path (V5)	176, 379
VT Path (Z6).....	303, 476

W

warranty	
certification.....	610
exclusions	610
general.....	609
liability.....	609
Wavelength	165, 256
Window.....	382
Window (KiB).....	444, 459
Window Size.....	471
Window Sweep	459, 485
Windows Size Unit.....	470
Wire Map.....	428
Wire Map Test Result.....	430
Wiring Standard	129
WIS	365, 486
WIS button	164
WIS Link Down	365
World Wide Name	150

X

XID	375
-----------	-----

Y

Y.1731	236
--------------	-----

Z

Z0	530
Z1	532
Z2	535
Z3	539
Z4	539
Z5	539
Z6	541
Z7	542
Zero Code Suppression	266

中国关于危害物质限制的规定

包含在本 EXFO 产品中的有毒有害物质或元素的名称及含量

Part Name 部件名称	Lead 铅 (Pb)	Mercury 汞 (Hg)	Cadmium 镉 (Cd)	Hexavalent Chromium 六价铬 (Cr(VI))	Polybrominated biphenyls 多溴联苯 (PBB)	Polybrominated diphenyl ethers 多溴二苯醚 (PBDE)
Enclosure 外壳	O	O	O	O	O	O
Electronic and electrical sub-assembly 电子和电气组件	X	O	X	O	X	X
Optical sub-assembly ^a 光学组件 ^a	X	O	O	O	O	O
Mechanical sub-assembly ^a 机械组件 ^a	O	O	O	O	O	O

Note:

注:

This table is prepared in accordance with the provisions of SJ/T 11364.

本表依据 SJ/T 11364 的规定编制。

O: Indicates that said hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement of GB/T 26572.

0: 表示该有害物质在该部件所有均质材料中的含量均在 GB/T 26572 标准规定的限量要求以下。

X: indicates that said hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement of GB/T 26572. Due to the limitations in current technologies, parts with the “X” mark cannot eliminate hazardous substances.



X: 表示该有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 标准规定的限量要求。

标记“X”的部件，皆因全球技术发展水平限制而无法实现有害物质的替代。

a. If applicable.

如果适用。

MARKING REQUIREMENTS
标注要求

Product 产品	Environmental protection use period (years) 环境保护使用期限（年）	Logo 标志
This EXFO product 本 EXFO 产品	10	
Battery ^a 电池	5	

a. If applicable.
如果适用。

P/N:1070509

www.EXFO.com · info@exfo.com

CORPORATE HEADQUARTERS	400 Godin Avenue	Quebec (Quebec) G1M 2K2 CANADA Tel.: 1 418 683-0211 · Fax: 1 418 683-2170
EXFO AMERICA	3400 Waterview Parkway Suite 100	Richardson, TX 75080 USA Tel.: 1 972-761-9271 · Fax: 1 972-761-9067
EXFO EUROPE	Winchester House, School Lane	Chandlers Ford, Hampshire S053 4DG ENGLAND Tel.: +44 2380 246 800 · Fax: +44 2380 246 801
EXFO ASIA-PACIFIC	62 Ubi Road 1, #09-01/02 Oxley Bizhub 2	SINGAPORE 408734 Tel.: +65 6333 8241 · Fax: +65 6333 8242
EXFO CHINA	Beijing Global Trade Center, Tower C, Room 1207, 36 North Third Ring Road East, Dongcheng District	Beijing 100013 P. R. CHINA Tel.: +86 (10) 5825 7755 · Fax: +86 (10) 5825 7722
EXFO SERVICE ASSURANCE	270 Billerica Road	Chelmsford MA, 01824 USA Tel.: 1 978 367-5600 · Fax: 1 978 367-5700
EXFO FINLAND	Elektroniikkatie 2	FI-90590 Oulu, FINLAND Tel.: +358 (0) 403 010 300 · Fax: +358 (0) 8 564 5203
TOLL-FREE	(USA and Canada)	1 800 663-3936

© 2016 EXFO Inc. All rights reserved.
Printed in Canada (2016-11)

