



Refractive Index Profiler

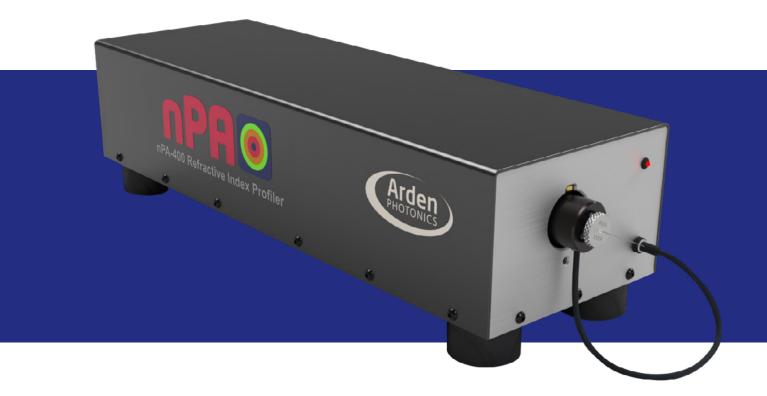

The nPA-400 Refractive Index Profiler uses a modified refracted near-field technique to analyse a fiber end-face to determine the full 2D refractive index distribution. The nPA-400 is the quick and easy way to get the Refractive Index data you need to verify your specialty fiber design and manufacturing processes.

Features & Benefits

- Prepare and measure a fiber sample in under 2 minutes
- Measure fibers up to 400 μm in diameter
- Measure 2D in seconds no time consuming data reconstruction
- Measure non-circularly symmetric fibers good for PM, octagonal, multicore
- Traceable calibration

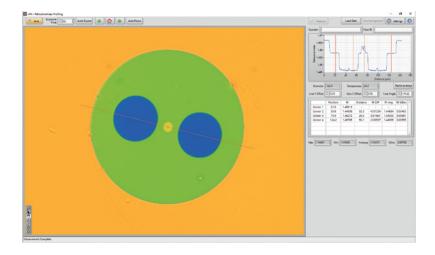



Technical Specifications

Measurement Capabilities	
Refractive Index Repeatability*	0.0002
Fiber Diameter	40 to 400 μm
Fiber Material	Silica glass
2D Measurement Time**	< 5 sec
Measurement Range***	+/- 0.025

*Repeatability is measured on a 125 µm MM fibre sample without removing from the measurement cell


** averaging 5 images


*** around reference fluid index


Optical Control of the Control of th	
Measurement Wavelength	630 nm
Maximum Field of View	520 μm
Image Sensor	1.1 inch CMOS, 4096 x 3000 pixels resolution


Physical	
Weight	6 kg
Size	0.5m x 0.16m x 0.13m
Operating Temp	15 – 30°C
Performance Specification	Validated at 22°C
Computer Requirements	All systems are supplied with a computer running up-to-date Windows operating system
Data Interface	1 X USB 3.0 (USB A to USB B: 1m cable supplied)


Refractive Index Profiler

















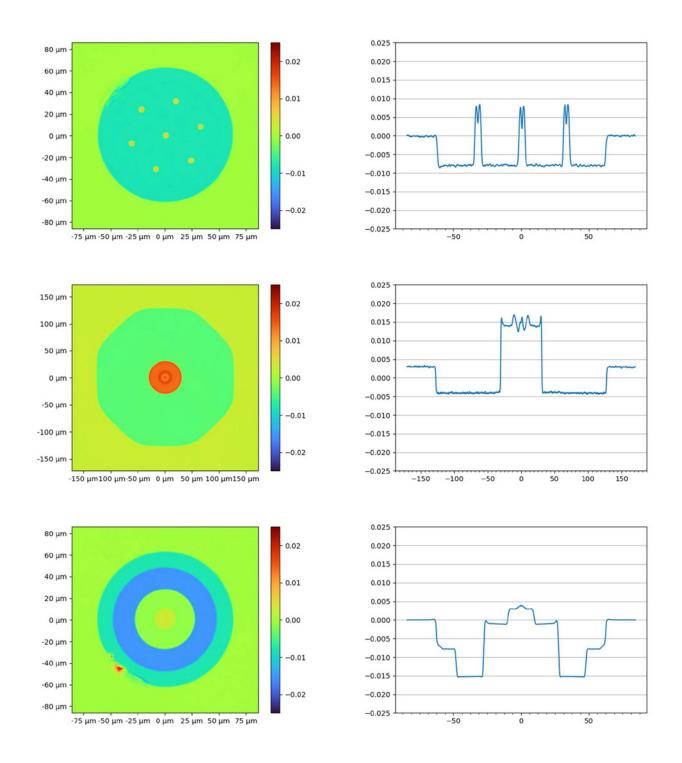

For North American sales enquiries call (727) 478-2651 or email us on sales@ardenphotonics.com For Rest of World sales enquiries call +44 (0)121 733 7721 or email us on sales@ardenphotonics.com

Iss 03 Jan 22