

S183PMII ver.2 / S184PM-SLDF ver.2

S183PMII ver.2 Fusion Splicer S184PM-SLDF ver.2 Fusion Splicer

- A New Standard in the Field for High-End/
Super High-End Fusion Splicing Applications

• Features of ver.2


1. Optimization of rotational adjustment for PANDA fiber
 2. Intuitive manual splicing
 3. Splicing dissimilar fiber mode
- Splicing various types of fiber
(Similar/Dissimilar, Dissimilar cladding, Polarization, High-strength, Very large diameter)
 - Intuitive GUI interface
 - Interlocking of measuring instrument
 - Improving reliability and productivity for the manufacture of optical components



Features and applications


Speciality Splicing Mode Easy

The advanced features of the S183PMII and S184PM-SLDF allow you to splice today's and tomorrow's most exotic fiber types. Whether performing high-strength splices, splicing small cladding fibers (80 μm), large cladding fibers (S183PMII: 500 μm , S184PM-SLDF: 1200 μm), PM fibers or erbium doped fibers, the S183PMII or S184PM-SLDF is the splicer for your high-end application.

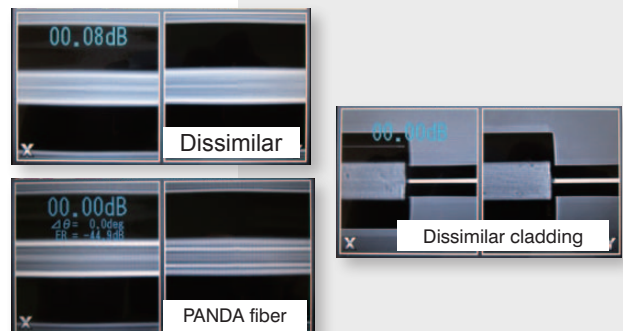


Quick Loading & Automatic Machine Adjustment

S183PMII and S184PM-SLDF automatically adjust for different fiber coating and cladding sizes. There is no need to exchange v-grooves or fiber clamps. In addition, the S183PMII and S184PM-SLDF have been designed so that the user simply loads the fiber and closes the lid to begin the splice process. There is no need to lower or set fiber clamps before starting to splice.

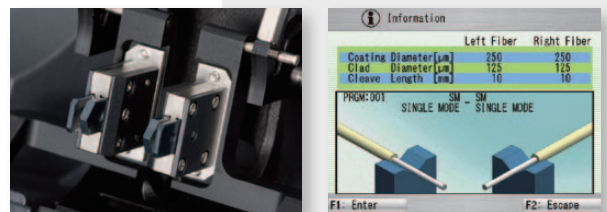


Automatic Fiber Holder Release

S183PMII and S184PM-SLDF automatically perform a tensile proof test on the fiber and releases the holder lid to avoid twisting the fiber after the splice. This automation eliminates the need for the user to manually open and reset the splicer after each fusion splice.

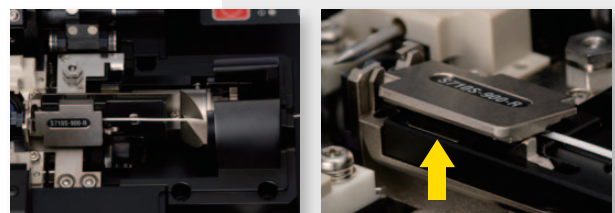


S183PMII ver.2 and S184PM-SLDF ver.2 are designed especially for the demanding OEM, R&D, production and other special applications in the optical components industry

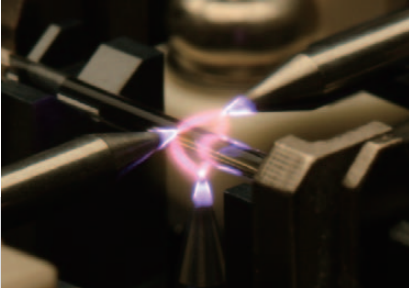


Three electrodes “Ring of fire”

The S184PM-SLDF ver.2 Fusion Splicer has three electrodes instead of the standard two electrodes. This groundbreaking technology makes the plasma field (temperature field) wider, adjustable and realizes splicing super large diameter fiber.

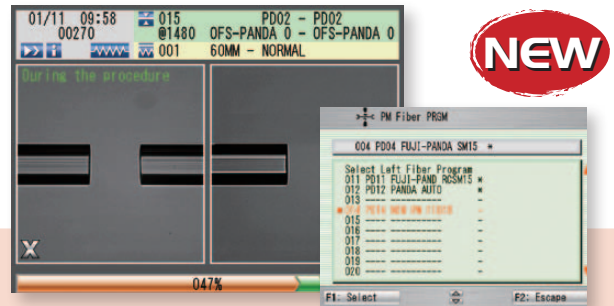


Automatic Optimization of rotational adjustment for PANDA fiber

New PANDA fiber is analyzed and the optimum program for rotational adjustment is automatically created. Unknown PANDA fiber can be easily spliced.

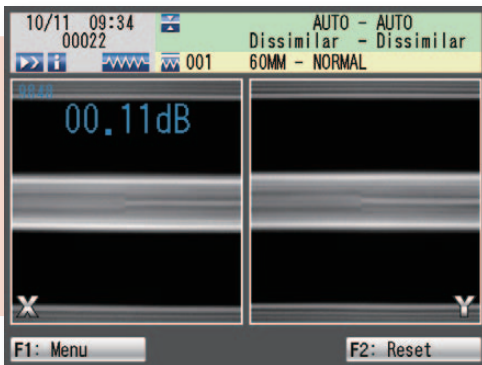

Splicing dissimilar fiber mode

This function adjusts the parameters automatically based on the setting fibers, and achieves accurate splicing with dissimilar core diameter splicing. If there is no fusion program, this function is useful for any combination of fibers with dissimilar core diameters.

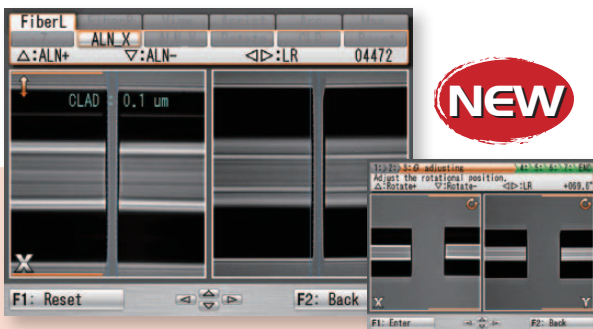

Intuitive Manual Splicing

The new design uses intuitive operation to control motors. With many support tools (such as alignment and Automatic rotational adjustment), a complex fiber can be spliced effortlessly by Manual splicing.



Advanced of control and workability via PC connection

“SmartFuse” has many functions: Export images, splice data and existing splice programs. Modify and import (to the splicer) new splice programs. Connect the splicer to feedback measurement instruments.

New functions are available for existing S183PMII and S184PM-SLDF by updating software. Please contact us for more information.

SPECIFICATIONS

Description	S183PMII ver.2	S184PM-SLDF ver.2
Applicable Fibers *1)	SM, MM, DSF, NZD, EDF, PMF, LDF, PCF, HighΔ	SM, MM, DSF, NZD, EDF, PMF, LDF, PCF, HighΔ
Cladding Diameter	80 to 500 μm	80 to 1200 μm *4)
Coating Diameter	160 to 2000 μm	160 to 2000 μm
Fibers Cleave Length	3 to 5 mm with coating clamping 9 to 11 mm with bare fiber clamping	5 mm with coating clamping 9 to 11 mm with bare fiber clamping
Sweep Length	±1.9 mm	±1.9 mm
Typical Insertion Loss *2)	0.02 dB for identical SM/0.01 dB for identical MM (Similar Fiber Splicing) 0.04 dB for identical DSF/0.05 dB for identical PMF	0.03 dB for identical SM
Typical Insertion Loss *2)	0.15 dB (SMF to DSF) (Dissimilar Fiber Splicing) 0.25 dB (SMF to HI980 Fiber)	0.15 dB (SMF to DSF) 0.25 dB (SMF to HI980 Fiber)
Extinction Ratio (Cross Talk) *2)	-40 dB (0.6 degree) (PANDA Fiber) (Similar Fiber Splicing) -32 dB (1.4 degree) (BOW-TIE Fiber)	-35 dB (1.0 degree) (PANDA Fiber) -30 dB (1.8 degree) (BOW-TIE Fiber)
Extinction Ratio (Cross Talk) *2)	-30 dB (1.8 degree) (PANDA Fiber to BOW-TIE Fiber) (Dissimilar Fiber Splicing)	-28 dB (2.3 degree) (PANDA Fiber to BOW-TIE Fiber)
Return Loss	>60dB	>60dB
Splice Time *3)	15 seconds for identical SM Fibers 35 seconds for identical PM Fibers (cladding clamping) 55 seconds for identical PM Fibers (coating clamping)	20 seconds for identical SM Fibers 45 seconds for identical PM Fibers (cladding clamping)
Heating Time	51 seconds for 60 mm sleeves 40 seconds for 40 mm sleeves	51 seconds for 60 mm sleeves 40 seconds for 40 mm sleeves
Manual Splicing Mode	Gap setting Manual alignment (X, Y, θ) Support Tool for Manual splicing	Gap setting Manual alignment (X, Y, θ) Support Tool for Manual splicing
Auto Splicing Mode	SM•MM•DSF automatic recognition Splicing dissimilar fiber PANDA fiber Auto	SM•MM•DSF automatic recognition Splicing dissimilar fiber PANDA fiber Auto
Splice Programs	72 Default/150 Available	43 Default/150 Available
Heating Programs	10 Default/12 Available	10 Default/12 Available
Sleeve	20, 40, 60 mm	20, 40, 60 mm
Magnification	215X & 430X	215X & 430X
Splice Memory	Maximum 2000 splices	Maximum 2000 splices
Size	350W × 197D × 154H mm	350W × 197D × 154H mm
Weight	8.5 kg	8.8 kg
Monitor	6.5" colour LCD monitor	6.5" colour LCD monitor
Video Output	Analog RGB	Analog RGB
Data Interface	USB ver.1.1 end Ethernet	USB ver.1.1 end Ethernet
Operating Temperature	0 to +40°C (without excessive humidity)	0 to +40°C (without excessive humidity)
Storage Temperature	-40 to +60°C (without excessive humidity)	-40 to +60°C (without excessive humidity)
Power Source	AC 100 to 240 V (50/60 Hz, AC Adaptor)	AC 100 to 240 V (50/60 Hz, AC Adaptor)

*1) It applies the fiber specified in the ITU-T standard. Regarding the type of fibers, it is necessary to optimize the splice program.

*2) These are typical data values. Depending on the fibers, the values can vary.

*3) Depending on program setting, the time can vary.

*4) The maximum value of cladding diameter can be 500μm depending on the type of fiber (PHOTONIC CRYSTAL and non-circle fiber, etc.).

STANDARD PACKAGE

Item	P/N	Quantity	
		S183PMII ver.2	S184PM-SLDF ver.2
① S183PMII Main Body *5)	S183-P2-A-0001	1	–
① S184PM-SLDF Main Body *6)	S184-PS-A-0001	–	1
② 250 μm Coating Fiber Holders	S710S-250	–	1 pair
② 400 μm Coating Fiber Holders	S710S-400	–	1 pair
② 900 μm Coating Fiber Holders	S710S-900	–	1 pair
Fiber Holders for LDF	S710S-LDF	–	1 pair
③ AC Adaptor	S974A	1	1
④ AC Adaptor	S975A	–	1
⑤ AC Cable	–	1	2
⑥ Electrodes for Regular Fiber (Spare)	S960	1 pair (2 pieces)	–
⑦ Electrodes Set for Regular Fiber	S184-X-A-0012	–	1 set (3 pieces)
⑧ Electrodes Set for LDF (Spare)	S184-X-A-0011	–	1 set (3 pieces)
⑨ Z Stage Lock	S183-X2-A-0010	1 pair	1 pair
⑩ Change Tool for Vertical Electrode	S184-X-A-0004	–	1
Electrode Sharpener	D5111	1	1
Operation Manual	FTS-331	1	–
	FTS-340	–	1

*5) Electrodes for regular fiber(S960) are installed in S183PMII Main Body.

*6) Electrodes set for LDF(S184-X-A-0010) are installed in S184PM-SLDF Main Body.

OPTIONAL ACCESSORIES

Item	P/N	Quantity	
		S183PMII ver.2	S184PM-SLDF ver.2
② 160μm Coating Fiber Holders	S710S-080	1 pair	1 pair
② 250μm Coating Fiber Holders	S710S-250	1 pair	1 pair
② 400μm Coating Fiber Holders	S710S-400	1 pair	1 pair
② 900μm Coating Fiber Holders	S710S-900	1 pair	1 pair
Special Fiber Holder (custom-made) *7)	–	1 pair	1 pair
Fiber Holders for LDF	S710S-LDF	1 pair	1 pair
Fiber Holders for Loose Tube	S710S-LT	1 pair	1 pair
⑥ Electrodes for Regular Fiber	S960	1 pair (2 pieces)	–
⑦ Electrodes for LDF	S968	1 pair (2 pieces)	–
⑧ Electrodes Set for Regular Fiber	S184-X-A-0012	–	1 set (3 pieces)
⑨ Electrodes Set for LDF	S184-X-A-0011	–	1 set (3 pieces)
⑩ Fiber Transporter	S183-X2-A-0002	1	1
SmartFuse (Software)	SF-01	1	1

*7) This is a custom-made item. Please inform us about the coating diameter within the range of 100-2000 μm.



⑩ Electrodes Set for LDF ⑩ Change Tool for Vertical Electrode ⑩ Fiber Transporter

■ Related product

Tool for preparing optical fiber

Stripper: S218R



Thermal stripper for single fiber (0.25 to 0.40 mm).

Stripper: S218H



Thermal stripping of single fiber (0.25, 0.90 mm) can strip high-strength by exclusive.

Cleaver: S326A



Cleaver for Std. 125 μm cladding fiber.

Cleaver: S326S80



Cleaver for 80 μm cladding fiber (fiber holder is not including).

Ultrasonic Cleaver: EFC-11



Large Diameter cleaver made by NorthLab Photonics. Cleaver for 80 to 200 μm cladding fiber.

LDF Cleaver: LCCII



Large Diameter Cleaver made by 3SAE Technologies. Cleaver for 125 to 1000 μm cladding fiber.


Protection Sleeves

Sleeve: S921/S922



Sleeve for single fiber of 0.25 to 0.90 mm.
S921: 60mm
S922: 40mm

Sleeve: for small diameter fiber S928 Series

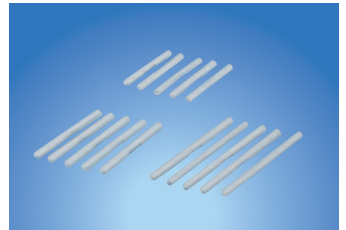

Sleeve for small diameter single fiber of 0.25 to 0.40 mm.
S928A-20: 20mm
S928A-25: 25mm
S928A-35: 35mm

Contact Us:

Furukawa Electric Co., Ltd.

Head Office:

2-3, Marunouchi 2-chome,
Chiyoda-ku, Tokyo,
100-8322, Japan
TEL: + 81 3 3286 3227
FAX: + 81 3 3286 3978
www.furukawa.co.jp
comsales@ho.furukawa.co.jp

Europe:

Furukawa Electric Europe, Ltd.

3rd Floor, Newcombe House
43-45 Notting Hill Gate,
London W11 3FE U.K.
TEL: + 44 20 7313 5320
FAX: + 44 20 7313 5310
www.furukawa.co.uk
splicers@furukawa.co.uk

North & South America: OFS Fitel, LLC

2000 Northeast Expressway
Norcross, Georgia 30071, U.S.A
TOLL FREE: + 1 866 452 9516
TEL: + 1 678 783 1090
FAX: + 1 678 783 1093
www.ofsoptics.com
splicers@ofsoptics.com

China:

Furukawa Shanghai, Ltd. Beijing Branch

1001A, Full Tower, No.09 Dong-
sanhuan ZhongRoad, Chaoyang
District, Beijing 100020, P.R. China
TEL: + 86 10 8591 0608
FAX: + 86 10 8591 0609
www.furukawa-sh.cn

South East Asia:

Furukawa Electric Singapore Pte. Ltd.

60 Albert Street, #13-10 OG
Albert Complex, Singapore
189969
Tel: + 65 6224 4686
Fax: + 65 6336 2635
comms@furukawa.com.sg

Export Control Regulations

Export of S183PMII and S184PM-SLDF form Japan are controlled under Foreign Exchange and Foreign Trade Control Act by Japanese government. Please note that the export of this product requires permission from Japanese government in advance. The products and/or technical information presented in this publication may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in Japan. In addition, the Export Administration Regulations (EAR) of the United States may be applicable. In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility and cost. Please contact the Ministry of Economy, Trade and Industry of Japan or the Department of Commerce of the United States for details about procedures.

* Furukawa Electric reserves the right to improve, enhance, or modify the features and specifications of FITEL products without prior notification.
* Company and product names appearing in this catalogue are resisted marks or trademarks of respective companies.