

## FIS BUFFERED FIBER ADAPTERS

### Available Styles

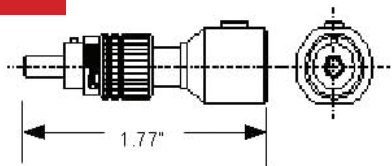
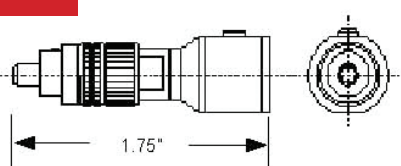

- ST
- FC
- SC

### Applications

- Optical Testing
- Repairs

Our Buffered Fiber Optic Adapters are designed to hold 900 buffer optical fiber, and are available in ST, FC, SC and SMA 905 configurations.

In addition to this particular fiber optic adapter style, we offer a wide range of other fiber optic adapters for those applications that require cable-to-cable connections. Our fiber optic adapters accommodate all standard fiber optic connectors including LC, SC, FC, ST, MU, MTRJ styles and more.

**ST****FC****SC**

## MATERIAL SPECIFICATIONS

### FC & ST Adapter

Ferrule	Ceramic
Connector Housing	Nickel Plated Metal
Adapter Backbody	Powder Coated Metal

### SC Adapter

Ferrule	Ceramic
Connector Housing	Plastic
Adapter Backbody	Powder Coated Metal

## SPECIFICATIONS

### Fiber Compatibility

125um Clad Fiber (singlemode or multimode)
900um Buffer

### Optical Loss

< 1 dB against a standard connector
-------------------------------------



# 1.800.5000.FIS

161 Clear Road • Oriskany, NY 13424  
Tel: 315.736.2206 • Fax: 315.736.2285  
info@fiberinstrumentsales.com  
www.fiberinstrumentsales.com

