

User Manual





Summary

0

| What is UN1CO mobile | 4 |
|------------------------------------|----|
| UNICO mobile: Compatibility | 5 |
| UNICO mobile: The standard package | 6 |
| UNICO mobile: Optionals | 8 |
| Optional: Ladder bracket | 9 |
| Optional: Pole mounting system | 10 |
| Optional: Tripod | 11 |
| Technical Specification | 12 |
| Cleaning - Maintenance | 12 |





WHAT IS UNICO mobile

UNICO mobile is a portable workbench on which you can fasten, with the fixing screw, intruments or tools. This solution allows to prevent the accidental fall of the equipment, both on "ground" or "aerial" applications.



UNICO mobile consists of a main shelf in reinforced plastic designed to attach in complete security:



















Cleaver

Stripper

Scissors

Splice protection sleeves

FO Cleaner

Other tools





UNICO mobile: COMPATIBILITY

UNICO mobile is conceived to ensure full compatibility with main arc fusion splicers and cleavers available on the market

Ο

| Brand | Splicer model | Splicer fixing system |
|-----------------|--------------------|-----------------------|
| | View 3 PRO | "A" screw |
| | View 5 PRO | "A" screw |
| | View 8 PRO | "A" screw |
| | M7 | "A" screw |
| Fujikura | 125 | "C" screw |
| | 225 | "C" screw |
| | 315 | "C" screw |
| | 415 | "C" screw |
| | 62S | "C" screw |
| | 70S | "C" screw |
| | 70S+ | "C" screw |
| FURUKAWA | Fitel S-179 | "C" screw |
| | Fitel Ninja NJ-001 | "B" screw |
| | Z1C | "C" screw |
| | T-25 | "C" screw |
| | T-39 | "C" screw |
| | T-66 | "C" screw |
| | T-71C | "C" screw |
| Fiber | Mini 4S | "A" screw |
| | Mini 6S | "A" screw |







Type B screw Type C screw





UNICO mobile: THE STANDARD PACKAGE

UNICO mobile standard package consists of: workbench, cleaver support, shoulder strap, belt hooking system, 1 tool holsters, 2 type A screws, 1 type B screws, two type C screws, 1 100 ml refillable FO cleaner.



Workbench



Belt hooking system



Shoulder strap



Cleaver support



Tool holster



FO cleaner







Type B screw*



*Be careful: pay attention during the screwing procedure to avoid accidental damages to the splicer battery





In this kind of configuration, UNICO mobile is worn by the operator during the work operations



What is needed for this configuration:

- 1. Workbench
- 2. Belt hooking system
- 3. Shoulder strap
- 4. Cleaver support
- 5. Screws
- 6. Tool holster





UNICO mobile: OPTIONALS

Thanks to its optional features, UNICO mobile can be used in any type of on the field applications, always ensuring safety against accidental falls of your equipment



Ladder bracket

With this bracket, UNICO mobile can be fixed to the ladder: the operator can work safely in aerial applications.



Pole mounting system

Thanks to this kit, UNICO mobile can be easily fixed on a pole. Lightweight and easy to assemble, it is suitable for operations on aerial cabling.

С



Tripod

This system transform UNICO mobile into a stand alone workstation. A compact table, easily transportable, which eases operators on the field tasks.





OPTIONAL - LADDER BRACKET

UNICO mobile can be installed, using a special bracket, directly on the ladder where the operator works. This allows a completely safe "hands free" work mode keeping the equipment fasten to the work surface.

Ο

What is needed for this configuration:

- 1. Workbench
- 2. Ladder bracket
- 3. Cleaver support
- 4. Screws
- 5. Tool holster



Ladder Bracket



Complete configuration



OPTIONAL - POLE MOUNTING SYSTEM

UNICO mobile can be easily attached to poles, to ease the aerial installation tasks. The kit consists of a bracket and a ratchet strap, with a coil of 400 kg capacity, which allows a safe and fast assembly.

What is needed for this configuration:

- 1. Workbench
- 2. Pole mounting system
- 3. Cleaver support
- 4. Screws
- 5. Tool holster





Pole mounting system



Complete configuration





OPTIONAL - TRIPOD



Thanks to a special support UNICO mobile can be installed on a tripod, which turns it into a stand alone worktop.

What is needed for this configuration:

- 1. Workbench
- 2. Tripod

- 3. Cleaver support
- 4. Screws
- 5. Tool holster






Complete configuration





TECHNICAL SPECIFICATIONS

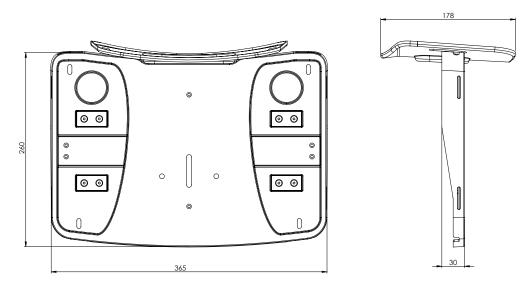

Width: 365 mm - 14.37 in Depth: 260 mm - 10.23 in Height: 178 mm - 7.00 in Weight: 1.25 kg - 2.75 lbs Material: ABS - ASA Belt hooking system length: 80 - 115 cm (31.50 - 45.27 in) with optional extension: additional 15 - 30 cm (5.90 - 11.81 in) Magnets: 4 (Traction: 17 kg in orthogonal direction to the magnet) Fastening Accessories: 2 x Type A screws

1 x Type B screws 1 x Type C screws

CLEANING - MAINTENANCE

The most common soaps or detergents, dissolved in hot water, can be used to clean up general dirt. If it doesn't work, isopropyl alcohol can also be used. Avoid abrasive powders. Rough areas can be restored using silicone-based polishes.

